


February 2012

기후변화 대응
CO₂ 3.75g
MLCC(CL03A104K) 1piece

RoHS+Halogen
Compliant
ecoparts

MULTILAYER CERAMIC CAPACITORS

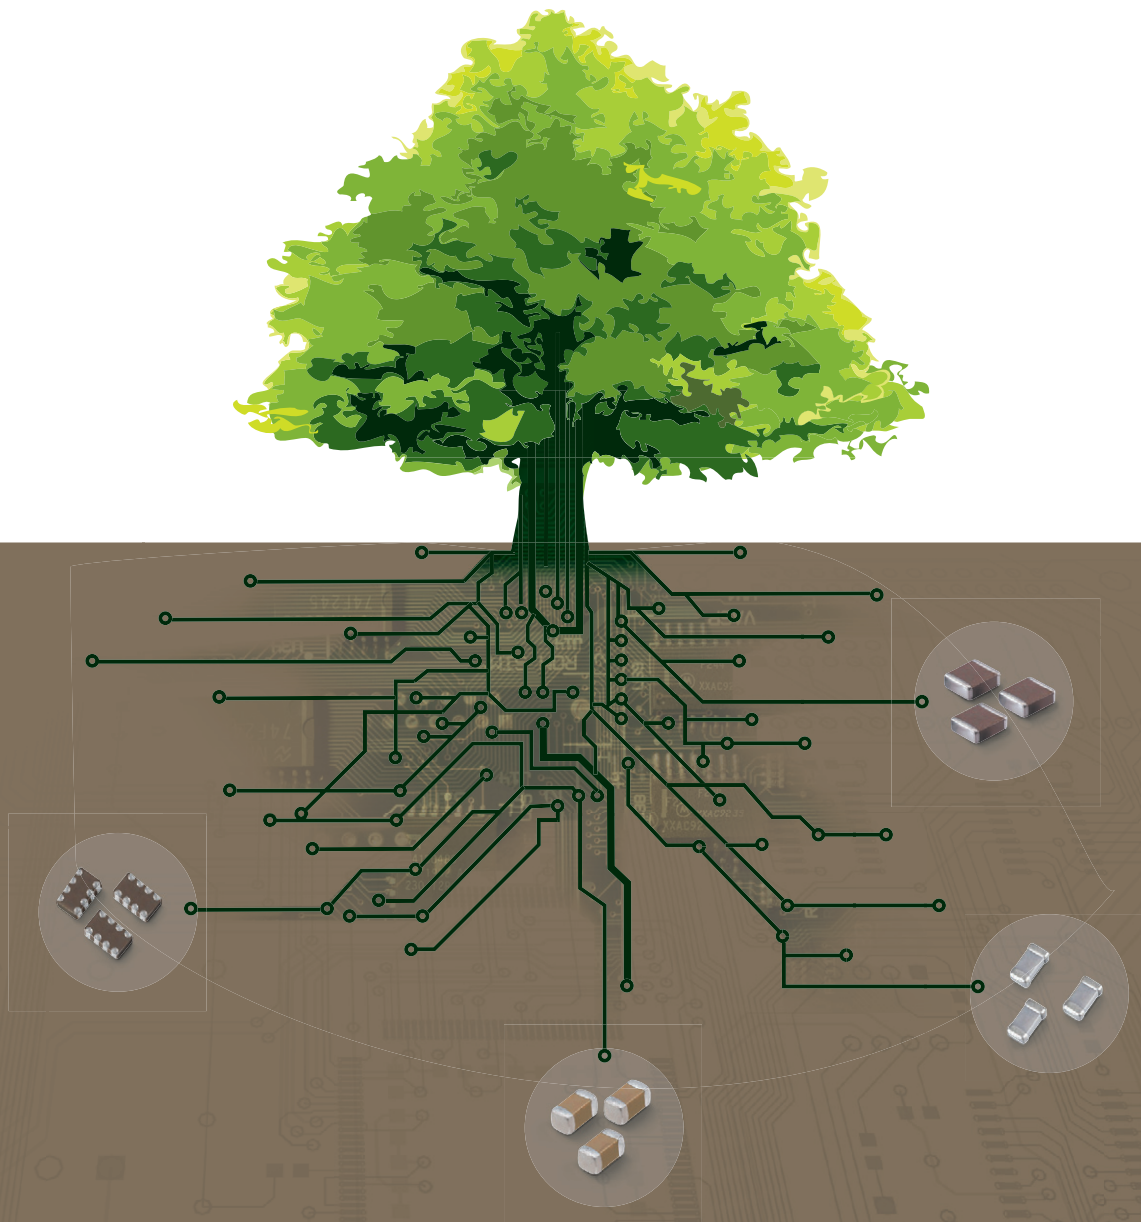

SAMSUNG
ELECTRO-MECHANICS

SAMSUNG



We declare that all our MLCCs are produced in accordance with EU ROHS and REACH Directive.

1. RoHS Compliance and restriction of Br

The following restricted materials are not used in packaging materials as well as products in compliance with the law and restriction.

- Cd, Pb, Hg, Cr+6, As, Br and the compounds, PCB, asbestos
- Bromic materials : PBBs, PBBOs, PBDO, PBDE, PBB

2. No use of materials breaking Ozone layer

The following ODS materials are not used in our fabrication process.

- ODS material : Freon, Haron, 1-1-1 TCE, CCl₄, HCFC

If you want more detailed Information, Please Visit Samsung Electro-mechanics Website
[<http://www.semlcr.com>]

CONTENTS

Part Numbering System	4	Part Numbering System
General Capacitors	6	General Capacitors
High Capacitance Capacitors	23	High Capacitance Capacitors
Super Small Size Capacitors	37	Super Small Size Capacitors
Medium-High Voltage Capacitors	41	Medium-High Voltage Capacitors
Array Type Capacitors	52	Array Type Capacitors
Low ESL Capacitors	55	Low ESL Capacitors
Reliability Test Condition	58	Reliability Test Condition
Premium Capacitors for Automotive Applications	62	Premium Capacitors for Automotive Applications
Packaging Specification	78	Packaging Specification
Application Manual for Surface Mounting	82	Application Manual for Surface Mounting

<i>CL</i>	<i>10</i>	<i>A</i>	<i>106</i>	<i>M</i>	<i>P</i>	<i>8</i>	<i>N</i>	<i>N</i>	<i>N</i>	<i>C</i>
<i>1</i>	<i>2</i>	<i>3</i>	<i>4</i>	<i>5</i>	<i>6</i>	<i>7</i>	<i>8</i>	<i>9</i>	<i>10</i>	<i>11</i>

CL=Multi layer Ceramic Capacitors

02=01005(0402)	21=0805(2012)	43=1812(4532)
03=0201(0603)	31=1206(3216)	55=2220(5750)
05=0402(1005)	32=1210(3225)	
10=0603(1608)	42=1808(4520)	

Class I	Class II
C=COG	A=X5R F=Y5V B=X7R X=X6S Y=X7S Z=X7T

Capacitance expressed in pF. 2 significant digits plus number of zeros.
example) 106=10 × 10⁶=10000000pF
For Values < 10pF, Letter R denotes decimal point
example) 1R5=1.5pF

B=±0.1pF F=±1pF, ±1%* K=±10%
C=±0.25pF G=±2% M=±20%
D=±0.5pF J=±5% Z=+80/-20%

*For Values $\leq 10\text{pF}$, $F=\pm 1\text{pF}$
Values $> 10\text{pF}$, $F=\pm 1\%$

R=4V	O=16V	B=50V	E=250V	H=630V	K=3000V
Q=6.3V	A=25V	C=100V	F=350V	I=1000V	
P=10V	L=35V	D=200V	G=500V	J=2000V	

3 = 0.30mm A = 0.65mm F = 1.25mm L = 3.20mm S = 1.35mm
5 = 0.50mm C = 0.85mm H = 1.60mm M = 1.15mm U = 1.80mm
8 = 0.80mm D = 1.00mm I = 2.00mm P = 1.15mm V = 2.50mm
9 = 0.90mm E = 1.10mm J = 2.50mm Q = 1.25mm Y = 1.25mm

A= Normal Product Pd / Ag / Ni barrier / Sn 100%
N= Normal Product Ni / Cu / Ni barrier / Sn 100%
G= Normal Product Cu / Cu / Ni barrier / Sn 100%
L= Low profile Ni / Cu / Ni barrier / Sn 100%
S= Normal Product Ni / Cu / Sn barrier / Sn 100%

N= Normal
A= Array(2-element)
B= Array(4-element)
L= LICC
J= SLIC

*Size tolerance						
Size Code	01005(0402)	0201(0603)	0402(1005)	0603(1608)	0805(2012)	1206(3216)
S	±0.03	±0.05	±0.07	±0.07		±0.30
Q	±0.05	±0.07	±0.10	±0.15	±0.15	
R	±0.07	±0.09	±0.15	±0.20	±0.20	
U	±0.09		±0.20	±0.25	±0.30	
Z			±0.40	±0.30		
9			±0.30			

N = Reserved for future use

B = Bulk
P = Bulk Case
C = Cardboard Tape, 7" Reel

O = Cardboard Tape, 10" Reel
D = Cardboard Tape, 13" Reel(10,000ea)
L = Cardboard Tape, 13" Reel(15,000ea)

E = Embossed Type, 7" Reel
G = Embossed Type, 7" Reel(3,000ea)
F = Embossed Type, 13" Reel
S = Embossed Type, 10" Reel

* Note : This catalog has only typical specifications because there is no space for detailed specifications.
Please approve our product specifications or transact the approval sheet for product specifications before ordering.

Class I (Temperature Compensation)

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient Range(ppm/°C)
C	C0G	-55 ~ +125	0 ±30

★
Class II (High Dielectric Constant)

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change(ΔC %)
A	X5R	-55 ~ + 85	±15
B	X7R	-55 ~ +125	±15
X	X6S	-55 ~ +105	±22
F	Y5V	-30 ~ + 85	-82 ~ +22
Y	X7S	-55 ~ +125	±22
Z	X7T	-55 ~ +125	-33 ~ +22

★★

Series	TC	Capacitance Step											
E-3	Y5V	1.0				2.2				4.7			
E-6	X5R	1.0	1.5	2.2	3.3	4.7	6.8						
	X7R												
	X6S												
	X7S												
	X7T												
E-12	C0G	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2

★★★

Size	Code	Thickness(mm)	Spec(mm)	Size	Code	Thickness(mm)	Spec(mm)
01005(0402)	2	0.20	±0.02	1210(3225)	C	0.85	±0.10*
0201(0603)	3	0.30	±0.03		9	0.90	±0.10*
0402(1005)	3	0.30	±0.03*		F	1.25	±0.20
	5	0.50	±0.05		S	1.35	±0.15
0603(1608)	5	0.50	+0.0/-0.1*		H	1.60	±0.20
	8	0.80	±0.10		U	1.80	±0.20*
0805(2012)	A	0.65	±0.10		I	2.00	±0.20
	C	0.85	±0.10		J	2.50	±0.20
	C	0.85	±0.10*		V	2.50	±0.30
	M	1.15	±0.10	1808(4520)	F	1.25	±0.20
	F	1.25	±0.10		H	1.60	±0.20
	Q	1.25	±0.15		I	2.00	±0.20
	Y	1.25	±0.20	1812(4532)	F	1.25	±0.20
1206(3216)	C	0.85	±0.15		H	1.60	±0.20
	C	0.85	±0.10*		I	2.00	±0.20
	E	1.10	±0.15		J	2.50	±0.20
	E	1.10	±0.10*		L	3.20	±0.30
	P	1.15	±0.10*	2220(5750)	H	1.60	±0.20
	M	1.15	±0.15		I	2.00	±0.20
	F	1.25	±0.15		J	2.50	±0.20
	H	1.60	±0.20		L	3.00	±0.30

■ * Mark is only applicable to "L" code , 12th code in part number.


■ Please discuss with sales person with regard to Pd products.

* Note : This catalog has only typical specifications because there is no space for detailed specifications.

Please approve our product specifications or transact the approval sheet for product specifications before ordering.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

General Capacitors

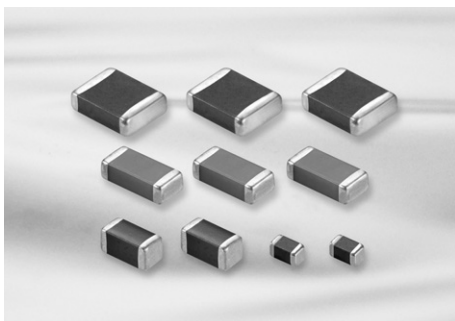


Feature

- Wide selection of size : from 0402 to 2220
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Wide capacitance range
- Wide temperature compensation and voltage range : from COG to Y5V and from 6.3V to 50V
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application

- HHP, DSC, DVC, LCD, TV, Memory Module, PDA, Game Machine
- Tuner (Product code C is suitable.)
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

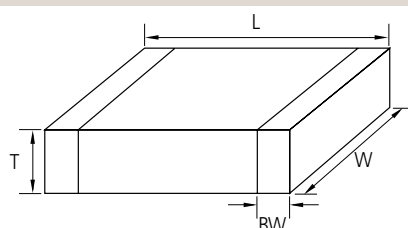

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.50±0.0/-0.1(*)	5	0.30±0.20
		1.60±0.10	0.80±0.10	0.80±0.10	8	
21	0805	2.00±0.10	1.25±0.10	0.85±0.10	C	0.5±0.2/-0.3
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
		2.00±0.15	1.25±0.15	1.25±0.15	Q	
		2.00±0.20	1.25±0.20	1.25±0.20	Y	
31	1206	3.20±0.20	1.60±0.20	0.60±0.10(*)	6	0.50±0.30
		3.20±0.15	1.60±0.15	0.85±0.15	C	
		3.20±0.20	1.60±0.20	0.85±0.10(*)	C	
		3.20±0.20	1.60±0.20	1.15±0.10(*)	P	
		3.20±0.15	1.60±0.15	1.25±0.15	F	
32	1210	3.20±0.20	1.60±0.20	1.60±0.20	H	0.60±0.30
		3.20±0.30	2.50±0.20	0.85±0.10(*)	C	
		3.20±0.30	2.50±0.20	0.90±0.10(*)	9	
		3.20±0.30	2.50±0.20	1.60±0.20	H	
		3.20±0.30	2.50±0.20	1.80±0.20(*)	U	
		3.20±0.30	2.50±0.20	2.00±0.20	I	
		3.20±0.30	2.50±0.20	2.50±0.20	J	
42	1808	3.20±0.40	2.50±0.30	2.50±0.30	V	0.80±0.30
		4.50±0.40	2.00±0.20	1.25±0.20	F	
		4.50±0.40	2.00±0.20	1.40±0.20	G	
		4.50±0.40	2.00±0.20	2.00±0.20	I	
43	1812	4.50±0.40	3.20±0.30	1.25±0.20	F	0.80±0.30
		4.50±0.40	3.20±0.30	2.50±0.20	J	
		4.50±0.40	3.20±0.30	3.20±0.30	L	
55	2220	5.70±0.40	5.00±0.40	2.50±0.20	J	1.00±0.30
		5.70±0.40	5.00±0.40	3.20±0.30	L	

■ * Mark is only applicable to "L" code , 12th code in part number.

* Note : This catalog has only typical specifications because there is no space for detailed specifications.
Please approve our product specifications or transact the approval sheet for product specifications before ordering.

General Capacitors Table (C0G)

Size(mm)	Vr(V)	Capacitance																							
		pF												nF											
		0.5	1	10	22	47	100	220	330	470	560	1	2.2	3.3	4.7	6.8	10	22	27	33	47	68	100	120	150
0402(1005)	25																								
	50																								
0603(1608)	25																								
	50																								
0805(2012)	25																								
	50																								
1206(3216)	16																								
	25																								
	50																								
1210(3225)	50																								
1812(4532)	25																								
	50																								
2220(5750)	50																								

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

General Capacitors Table (X5R)

Size(mm)	Vr(V)	Capacitance (μF)									
		0.1	0.22	0.47	1	2.2	4.7	10	22	47	100
0402(1005)	4										
	6.3										
	10										
	16										
	25										
0603(1608)	4										
	6.3										
	10										
	16										
	25										
	50										
0805(2012)	4										
	6.3										
	10										
	16										
	25										
	50										
1206(3216)	6.3										
	10										
	16										
	25										
	50										
1210(3225)	6.3										
	10										
	16										
	25										

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

General Capacitors Table -Low Profile (X5R)

Size(mm)	Tmax (mm)	Vr(V)	Capacitance (μF)					
			1	2.2	4.7	10	22	47
0402(1005)	0.3	6.3	X6S					
		10						
		16						
0603(1608)	0.5	6.3						
		10						
		16						
		25						
0805(2012)	0.7	10						
		16						
		25						
	0.95	4						(Tmax=1.0)
		6.3						(Tmax=1.0)
		10						
		16						
		25				X6S		
1206(3216)	0.7	10						
	0.95	6.3						
		10						
		16						
		25			X6S			
		50		(Tmax=1.0)	(Tmax=1.0)			
1210(3225)	0.95	16						
	2.0	25						
		35						
		50						

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

General Capacitors Table (X6S)

Size(mm)	Vr(V)	Capacitance (μF)									
		0.1	0.22	0.47	1	2.2	4.7	10	22	47	100
0402(1005)	4										
	6.3										
	10										
0603(1608)	4										
	6.3										
	10										
	16										
	25										
0805(2012)	4										
	6.3										
	10										
	16										
	25										
1206(3216)	6.3										
	10										
	16										
	25										
1210(3225)	6.3										
	10										
	16										
	25										

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

General Capacitors Table (X7R)

Size(mm)	Vr(V)	Capacitance (μF)									
		0.1	0.22	0.47	1	2.2	4.7	10	22	47	100
0402(1005)	6.3										
	10			X7S							
	16										
0603(1608)	6.3										
	10										
	16										
	25										
	50										
0805(2012)	6.3										
	10										
	16										
	25						X7S				
	35										
	50										
1206(3216)	6.3										
	10										
	16										
	25										
	35										
	50										
1210(3225)	6.3									X7T	
	10										
	16										
	25										
	50										

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

General Capacitors Table (Y5V)

Size(mm)	Vr(V)	Capacitance (μF)									
		0.1	0.22	0.47	1	2.2	4.7	10	22	47	
0402(1005)	6.3										
	10										
	16										
	25										
0603(1608)	6.3										
	10										
	16										
	25										
	50										
0805(2012)	6.3										
	10										
	16										
	25										
	50										
1206(3216)	10										
	16										
	25										
	50										
1210(3225)	6.3										
	10										
	16										
	25										
	35										
	50										

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Product Lineup (General Capacitors-C0G)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05C0R5CB5NNN □	1.00×0.50	0.5pF	50	±0.25pF	0.55
2	CL05CR75CB5NNN □		0.75pF	50	±0.25pF	0.55
3	CL05C010CB5NNN □		1.0pF	50	±0.25pF	0.55
4	CL05C1R2CB5NNN □		1.2pF	50	±0.25pF	0.55
5	CL05C1R5CB5NNN □		1.5pF	50	±0.25pF	0.55
6	CL05C1R8CB5NNN □		1.8pF	50	±0.25pF	0.55
7	CL05C020CB5NNN □		2.0pF	50	±0.25pF	0.55
8	CL05C2R2CB5NNN □		2.2pF	50	±0.25pF	0.55
9	CL05C2R4CB5NNN □		2.4pF	50	±0.25pF	0.55
10	CL05C2R5CB5NNN □		2.5pF	50	±0.25pF	0.55
11	CL05C2R7CB5NNN □		2.7pF	50	±0.25pF	0.55
12	CL05C030CB5NNN □		3.0pF	50	±0.25pF	0.55
13	CL05C3R3CB5NNN □		3.3pF	50	±0.25pF	0.55
14	CL05C3R5CB5NNN □		3.5pF	50	±0.25pF	0.55
15	CL05C3R6CB5NNN □		3.6pF	50	±0.25pF	0.55
16	CL05C3R9CB5NNN □		3.9pF	50	±0.25pF	0.55
17	CL05C040CB5NNN □		4.0pF	50	±0.25pF	0.55
18	CL05C4R3CB5NNN □		4.3pF	50	±0.25pF	0.55
19	CL05C4R7CB5NNN □		4.7pF	50	±0.25pF	0.55
20	CL05C050DB5NNN □		5.0pF	50	±0.5pF	0.55
21	CL05C5R6DB5NNN □		5.6pF	50	±0.5pF	0.55
22	CL05C060DB5NNN □		6.0pF	50	±0.5pF	0.55
23	CL05C6R2DB5NNN □		6.2pF	50	±0.5pF	0.55
24	CL05C6R8DB5NNN □		6.8pF	50	±0.5pF	0.55
25	CL05C070DB5NNN □		7.0pF	50	±0.5pF	0.55
26	CL05C080DB5NNN □		8.0pF	50	±0.5pF	0.55
27	CL05C8R2DB5NNN □		8.2pF	50	±0.5pF	0.55
28	CL05C090DB5NNN □		9.0pF	50	±0.5pF	0.55
29	CL05C9R1DB5NNN □		9.1pF	50	±0.5pF	0.55
30	CL05C100JB5NNN □		10pF	50	±5%	0.55
31	CL05C110JB5NNN □		11pF	50	±5%	0.55
32	CL05C120JB5NNN □		12pF	50	±5%	0.55
33	CL05C130JB5NNN □		13pF	50	±5%	0.55
34	CL05C150JB5NNN □		15pF	50	±5%	0.55
35	CL05C160JB5NNN □		16pF	50	±5%	0.55
36	CL05C180JB5NNN □		18pF	50	±5%	0.55
37	CL05C200JB5NNN □		20pF	50	±5%	0.55
38	CL05C220JA5NNN □		22pF	25	±5%	0.55
39	CL05C220JB5NNN □		22pF	50	±5%	0.55
40	CL05C240JB5NNN □		24pF	50	±5%	0.55
41	CL05C270JB5NNN □		27pF	50	±5%	0.55
42	CL05C270JA5NNN □		27pF	25	±5%	0.55
43	CL05C300JB5NNN □		30pF	50	±5%	0.55
44	CL05C330JB5NNN □		33pF	50	±5%	0.55
45	CL05C360JB5NNN □		36pF	50	±5%	0.55
46	CL05C390JB5NNN □		39pF	50	±5%	0.55
47	CL05C430JB5NNN □		43pF	50	±5%	0.55
48	CL05C470JB5NNN □		47pF	50	±5%	0.55
49	CL05C510JB5NNN □		51pF	50	±5%	0.55
50	CL05C560JB5NNN □		56pF	50	±5%	0.55

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (General Capacitors-C0G)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
51	CL05C620JB5NNN □	1.00×0.50	62pF	50	±5%	0.55
52	CL05C680JB5NNN □		68pF	50	±5%	0.55
53	CL05C750JB5NNN □		75pF	50	±5%	0.55
54	CL05C820JB5NNN □		82pF	50	±5%	0.55
55	CL05C910JB5NNN □		91pF	50	±5%	0.55
56	CL05C101JB5NNN □		100pF	50	±5%	0.55
57	CL05C121JB5NNN □		120pF	50	±5%	0.55
58	CL05C151JB5NNN □		150pF	50	±5%	0.55
59	CL05C181JB5NNN □		180pF	50	±5%	0.55
60	CL05C201JB5NNN □		200pF	50	±5%	0.55
61	CL05C221JB5NNN □		220pF	50	±5%	0.55
62	CL05C271JB5NNN □		270pF	50	±5%	0.55
63	CL05C331JB5NNN □		330pF	50	±5%	0.55
64	CL05C391JB5NNN □		390pF	50	±5%	0.55
65	CL05C471JB5NNN □		470pF	50	±5%	0.55
66	CL05C471JO5NNN □		470pF	16	±5%	0.55
67	CL05C681JB5NNN □		680pF	50	±5%	0.55
68	CL05C821JB5NNN □		820pF	50	±5%	0.55
69	CL05C102JB5NNN □		1nF	50	±5%	0.55
70	CL05C102JA5NNN □		1nF	25	±5%	0.55
71	CL05C102JO5NNN □		1nF	16	±5%	0.55
1	CL10C0R3CB8NNN □	1.60×0.80	0.3pF	50	±0.25pF	0.90
2	CL10C0R5CB8NNN □		0.5pF	50	±0.25pF	0.90
3	CL10CR75CB8NNN □		0.75pF	50	±0.25pF	0.90
4	CL10C010CB8NNN □		1.0pF	50	±0.25pF	0.90
5	CL10C1R2CB8NNN □		1.2pF	50	±0.25pF	0.90
6	CL10C1R5CB8NNN □		1.5pF	50	±0.25pF	0.90
7	CL10C1R8CB8NNN □		1.8pF	50	±0.25pF	0.90
8	CL10C020CB8NNN □		2.0pF	50	±0.25pF	0.90
9	CL10C2R2CB8NNN □		2.2pF	50	±0.25pF	0.90
10	CL10C2R4CB8NNN □		2.4pF	50	±0.25pF	0.90
11	CL10C2R5CB8NNN □		2.5pF	50	±0.25pF	0.90
12	CL10C2R7CB8NNN □		2.7pF	50	±0.25pF	0.90
13	CL10C030CB8NNN □		3.0pF	50	±0.25pF	0.90
14	CL10C3R3CB8NNN □		3.3pF	50	±0.25pF	0.90
15	CL10C3R5CB8NNN □		3.5pF	50	±0.25pF	0.90
16	CL10C3R6CB8NNN □		3.6pF	50	±0.25pF	0.90
17	CL10C3R9CB8NNN □		3.9pF	50	±0.25pF	0.90
18	CL10C040CB8NNN □		4.0pF	50	±0.25pF	0.90
19	CL10C4R3CB8NNN □		4.3pF	50	±0.25pF	0.90
20	CL10C4R7CB8NNN □		4.7pF	50	±0.25pF	0.90
21	CL10C050DB8NNN □		5.0pF	50	±0.5pF	0.90
22	CL10C5R6DB8NNN □		5.6pF	50	±0.5pF	0.90
23	CL10C060DB8NNN □		6.0pF	50	±0.5pF	0.90
24	CL10C6R2DB8NNN □		6.2pF	50	±0.5pF	0.90
25	CL10C6R8DB8NNN □		6.8pF	50	±0.5pF	0.90
26	CL10C070DB8NNN □		7.0pF	50	±0.5pF	0.90
27	CL10C7R5DB8NNN □		7.5pF	50	±0.5pF	0.90
28	CL10C080DB8NNN □		8.0pF	50	±0.5pF	0.90
29	CL10C8R2DB8NNN □		8.2pF	50	±0.5pF	0.90

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Product Lineup (General Capacitors-C0G)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
30	CL10C090DB8NNN □	1.60 × 0.80	9.0 pF	50	±0.5 pF	0.90
31	CL10C9R1DB8NNN □		9.1 pF	50	±0.5 pF	0.90
32	CL10C100JB8NNN □		10 pF	50	±5%	0.90
33	CL10C110JB8NNN □		11 pF	50	±5%	0.90
34	CL10C120JB8NNN □		12 pF	50	±5%	0.90
35	CL10C130JB8NNN □		13 pF	50	±5%	0.90
36	CL10C140JB8NNN □		14 pF	50	±5%	0.90
37	CL10C150JB8NNN □		15 pF	50	±5%	0.90
38	CL10C160JB8NNN □		16 pF	50	±5%	0.90
39	CL10C180JB8NNN □		18 pF	50	±5%	0.90
40	CL10C200JB8NNN □		20 pF	50	±5%	0.90
41	CL10C220JB8NNN □		22 pF	50	±5%	0.90
42	CL10C240JB8NNN □		24 pF	50	±5%	0.90
43	CL10C250JB8NNN □		25 pF	50	±5%	0.90
44	CL10C270JB8NNN □		27 pF	50	±5%	0.90
45	CL10C300JB8NNN □		30 pF	50	±5%	0.90
46	CL10C330JB8NNN □		33 pF	50	±5%	0.90
47	CL10C360JB8NNN □		36 pF	50	±5%	0.90
48	CL10C390JB8NNN □		39 pF	50	±5%	0.90
49	CL10C430JB8NNN □		43 pF	50	±5%	0.90
50	CL10C470JB8NNN □		47 pF	50	±5%	0.90
51	CL10C510JB8NNN □		51 pF	50	±5%	0.90
52	CL10C560JB8NNN □		56 pF	50	±5%	0.90
53	CL10C620JB8NNN □		62 pF	50	±5%	0.90
54	CL10C680JB8NNN □		68 pF	50	±5%	0.90
55	CL10C750JB8NNN □		75 pF	50	±5%	0.90
56	CL10C820JB8NNN □		82 pF	50	±5%	0.90
57	CL10C910JB8NNN □		91 pF	50	±5%	0.90
58	CL10C101JB8NNN □		100 pF	50	±5%	0.90
59	CL10C111JB8NNN □		110 pF	50	±5%	0.90
60	CL10C121JB8NNN □		120 pF	50	±5%	0.90
61	CL10C131JB8NNN □		130 pF	50	±5%	0.90
62	CL10C151JB8NNN □		150 pF	50	±5%	0.90
63	CL10C161JB8NNN □		160 pF	50	±5%	0.90
64	CL10C181JB8NNN □		180 pF	50	±5%	0.90
65	CL10C201JB8NNN □		200 pF	50	±5%	0.90
66	CL10C221JB8NNN □		220 pF	50	±5%	0.90
67	CL10C241JB8NNN □		240 pF	50	±5%	0.90
68	CL10C271JB8NNN □		270 pF	50	±5%	0.90
69	CL10C301JB8NNN □		300 pF	50	±5%	0.90
70	CL10C331JB8NNN □		330 pF	50	±5%	0.90
71	CL10C361JB8NNN □		360 pF	50	±5%	0.90
72	CL10C391JB8NNN □		390 pF	50	±5%	0.90
73	CL10C431JB8NNN □		430 pF	50	±5%	0.90
74	CL10C471JB8NNN □		470 pF	50	±5%	0.90
75	CL10C511JB8NNN □		510 pF	50	±5%	0.90
76	CL10C561JB8NNN □		560 pF	50	±5%	0.90
77	CL10C621JB8NNN □		620 pF	50	±5%	0.90
78	CL10C681JB8NNN □		680 pF	50	±5%	0.90
79	CL10C751JB8NNN □		750 pF	50	±5%	0.90

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (General Capacitors-C0G)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
80	CL10C821JB8NNN □	1.60×0.80	820pF	50	±5%	0.90
81	CL10C102JB8NNN □		1nF	50	±5%	0.90
82	CL10C182JB8NNN □		1.8nF	50	±5%	0.90
83	CL10C222JB8NNN □		2.2nF	50	±5%	0.90
84	CL10C562JB8NNN □		5.6nF	50	±5%	0.90
1	CL21CR47CBANNN □	2.00×1.25	0.47pF	50	±0.25pF	0.75
2	CL21C0R5CBANNN □		0.5pF	50	±0.25pF	0.75
3	CL21C010CBANNN □		1.0pF	50	±0.25pF	0.75
4	CL21C1R2CBANNN □		1.2pF	50	±0.25pF	0.75
5	CL21C1R5CBANNN □		1.5pF	50	±0.25pF	0.75
6	CL21C1R8CBANNN □		1.8pF	50	±0.25pF	0.75
7	CL21C020CBANNN □		2.0pF	50	±0.25pF	0.75
8	CL21C2R2CBANNN □		2.2pF	50	±0.25pF	0.75
9	CL21C2R4CBANNN □		2.4pF	50	±0.25pF	0.75
10	CL21C2R5CBANNN □		2.5pF	50	±0.25pF	0.75
11	CL21C2R7CBANNN □		2.7pF	50	±0.25pF	0.75
12	CL21C030CBANNN □		3.0pF	50	±0.25pF	0.75
13	CL21C3R2CBANNN □		3.2pF	50	±0.25pF	0.75
14	CL21C3R3CBANNN □		3.3pF	50	±0.25pF	0.75
15	CL21C3R6CBANNN □		3.6pF	50	±0.25pF	0.75
16	CL21C3R9CBANNN □		3.9pF	50	±0.25pF	0.75
17	CL21C040CBANNN □		4.0pF	50	±0.25pF	0.75
18	CL21C4R7CBANNN □		4.7pF	50	±0.25pF	0.75
19	CL21C5R6DBANNN □		5.6pF	50	±0.5pF	0.75
20	CL21C060DBANNN □		6.0pF	50	±0.5pF	0.75
21	CL21C6R8DBANNN □		6.8pF	50	±0.5pF	0.75
22	CL21C070DBANNN □		7.0pF	50	±0.5pF	0.75
23	CL21C7R5DBANNN □		7.5pF	50	±0.5pF	0.75
24	CL21C080DBANNN □		8.0pF	50	±0.5pF	0.75
25	CL21C8R2DBANNN □		8.2pF	50	±0.5pF	0.75
26	CL21C090DBANNN □		9.0pF	50	±0.5pF	0.75
27	CL21C100JBANNN □		10pF	50	±5%	0.75
28	CL21C120JBANNN □		12pF	50	±5%	0.75
29	CL21C130JBANNN □		13pF	50	±5%	0.75
30	CL21C140JBANNN □		14pF	50	±5%	0.75
31	CL21C150JBANNN □		15pF	50	±5%	0.75
32	CL21C160JBANNN □		16pF	50	±5%	0.75
33	CL21C180JBANNN □		18pF	50	±5%	0.75
34	CL21C200JBANNN □		20pF	50	±5%	0.75
35	CL21C220JBANNN □		22pF	50	±5%	0.75
36	CL21C240JBANNN □		24pF	50	±5%	0.75
37	CL21C250JBANNN □		25pF	50	±5%	0.75
38	CL21C270JBANNN □		27pF	50	±5%	0.75
39	CL21C300JBANNN □		30pF	50	±5%	0.75
40	CL21C330JBANNN □		33pF	50	±5%	0.75
41	CL21C360JBANNN □		36pF	50	±5%	0.75
42	CL21C390JBANNN □		39pF	50	±5%	0.75
43	CL21C430JBANNN □		43pF	50	±5%	0.75
44	CL21C470JBANNN □		47pF	50	±5%	0.75
45	CL21C510JBANNN □		51pF	50	±5%	0.75

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Product Lineup (General Capacitors-C0G)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
46	CL21C560JBANNN □	2.00 × 1.25	56 pF	50	±5%	0.75
47	CL21C620JBANNN □		62 pF	50	±5%	0.75
48	CL21C680JBANNN □		68 pF	50	±5%	0.75
49	CL21C750JBANNN □		75 pF	50	±5%	0.75
50	CL21C820JBANNN □		82 pF	50	±5%	0.75
51	CL21C910JBANNN □		91 pF	50	±5%	0.75
52	CL21C101JBANNN □		100 pF	50	±5%	0.75
53	CL21C111JBANNN □		110 pF	50	±5%	0.75
54	CL21C121JBANNN □		120 pF	50	±5%	0.75
55	CL21C131JBANNN □		130 pF	50	±5%	0.75
56	CL21C151JBANNN □		150 pF	50	±5%	0.75
57	CL21C161JBANNN □		160 pF	50	±5%	0.75
58	CL21C181JBANNN □		180 pF	50	±5%	0.75
59	CL21C201JBANNN □		200 pF	50	±5%	0.75
60	CL21C221JBANNN □		220 pF	50	±5%	0.75
61	CL21C241JBANNN □		240 pF	50	±5%	0.75
62	CL21C271JBANNN □		270 pF	50	±5%	0.75
63	CL21C301JBANNN □		300 pF	50	±5%	0.75
64	CL21C331JBANNN □		330 pF	50	±5%	0.75
65	CL21C361JBANNN □		360 pF	50	±5%	0.75
66	CL21C391JBANNN □		390 pF	50	±5%	0.75
67	CL21C431JBANNN □		430 pF	50	±5%	0.75
68	CL21C471JBANNN □		470 pF	50	±5%	0.75
69	CL21C511JBANNN □		510 pF	50	±5%	0.75
70	CL21C561JBANNN □		560 pF	50	±5%	0.75
71	CL21C621JBCNNN □		620 pF	50	±5%	0.95
72	CL21C681JBCNNN □		680 pF	50	±5%	0.95
73	CL21C751JBCNNN □		750 pF	50	±5%	0.95
74	CL21C821JBCNNN □		820 pF	50	±5%	0.95
75	CL21C102JBCNNN □		1 nF	50	±5%	0.95
76	CL21C122JBFNNN □		1.2 nF	50	±5%	1.35
77	CL21C152JBFNNN □		1.5 nF	50	±5%	1.35
78	CL21C182JBFNNN □		1.8 nF	50	±5%	1.35
79	CL21C222JBFNNN □		2.2 nF	50	±5%	1.35
80	CL21C332JAFNNN □		3.3 nF	25	±5%	1.35
81	CL21C332JBFNNN □		3.3 nF	50	±5%	1.35
82	CL21C392JAANNN □		3.9 nF	25	±5%	0.75
83	CL21C392JBFNNN □		3.9 nF	50	±5%	1.35
84	CL21C472JAFNNN □		4.7 nF	25	±5%	1.35
85	CL21C472JBFNNN □		4.7 nF	50	±5%	1.35
86	CL21C562JBFNNN □		5.6 nF	50	±5%	1.35
87	CL21C822JAFNNN □		8.2 nF	25	±5%	1.35
88	CL21C103JBFNNN □		10 nF	50	±5%	1.35
1	CL31C0R5CBCNNN □	3.20 × 1.60	0.5 pF	50	±0.25 pF	1.0
2	CL31C010CBCNNN □		1.0 pF	50	±0.25 pF	1.0
3	CL31C1R5CBCNNN □		1.5 pF	50	±0.25 pF	1.0
4	CL31C1R8CBCNNN □		1.8 pF	50	±0.25 pF	1.0
5	CL31C020CBCNNN □		2.0 pF	50	±0.25 pF	1.0
6	CL31C2R2CBCNNN □		2.2 pF	50	±0.25 pF	1.0
7	CL31C2R7CBCNNN □		2.7 pF	50	±0.25 pF	1.0

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (General Capacitors-C0G)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
8	CL31C030CBCNNN □	3.20×1.60	3.0pF	50	±0.25pF	1.0
9	CL31C3R3CBCNNN □		3.3pF	50	±0.25pF	1.0
10	CL31C040CBCNNN □		4.0pF	50	±0.25pF	1.0
11	CL31C4R7CBCNNN □		4.7pF	50	±0.25pF	1.0
12	CL31C100JBCNNN □		10pF	50	±5%	1.0
13	CL31C120JBCNNN □		12pF	50	±5%	1.0
14	CL31C150JBCNNN □		15pF	50	±5%	1.0
15	CL31C180JBCNNN □		18pF	50	±5%	1.0
16	CL31C200JBCNNN □		20pF	50	±5%	1.0
17	CL31C220JBCNNN □		22pF	50	±5%	1.0
18	CL31C270JBCNNN □		27pF	50	±5%	1.0
19	CL31C300JBCNNN □		30pF	50	±5%	1.0
20	CL31C330JBCNNN □		33pF	50	±5%	1.0
21	CL31C390JBCNNN □		39pF	50	±5%	1.0
22	CL31C470JBCNNN □		47pF	50	±5%	1.0
23	CL31C510JBCNNN □		51pF	50	±5%	1.0
24	CL31C560JBCNNN □		56pF	50	±5%	1.0
25	CL31C680JBCNNN □		68pF	50	±5%	1.0
26	CL31C750JBCNNN □		75pF	50	±5%	1.0
27	CL31C820JBCNNN □		82pF	50	±5%	1.0
28	CL31C101JBCNNN □		100pF	50	±5%	1.0
29	CL31C121JBCNNN □		120pF	50	±5%	1.0
30	CL31C151JBCNNN □		150pF	50	±5%	1.0
31	CL31C181JBCNNN □		180pF	50	±5%	1.0
32	CL31C221JBCNNN □		220pF	50	±5%	1.0
33	CL31C271JBCNNN □		270pF	50	±5%	1.0
34	CL31C331JBCNNN □		330pF	50	±5%	1.0
35	CL31C391JBCNNN □		390pF	50	±5%	1.0
36	CL31C471JBCNNN □		470pF	50	±5%	1.0
37	CL31C561JBCNNN □		560pF	50	±5%	1.0
38	CL31C681JBCNNN □		680pF	50	±5%	1.0
39	CL31C821JBCNNN □		820pF	50	±5%	1.0
40	CL31C102JBCNNN □		1nF	50	±5%	1.0
41	CL31C122JBCNNN □		1.2nF	50	±5%	1.0
42	CL31C152JBCNNN □		1.5nF	50	±5%	1.0
43	CL31C182JBCNNN □		1.8nF	50	±5%	1.0
44	CL31C222JBCNNN □		2.2nF	50	±5%	1.0
45	CL31C272JBFNNN □		2.7nF	50	±5%	1.4
46	CL31C332JBFNNN □		3.3nF	50	±5%	1.4
47	CL31C472JBFNNN □		4.7nF	50	±5%	1.4
48	CL31C682JBHNNN □		6.8nF	50	±5%	1.8
49	CL31C103JAFNNN □		10nF	25	±5%	1.4
50	CL31C223JBHNNN □		22nF	50	±5%	1.8
51	CL31C333JBHNNN □		33nF	50	±5%	1.8
1	CL32C472JBFNNN □	3.20×2.50	4.7nF	50	±5%	1.45
2	CL32C103JBFNNN □		10nF	50	±5%	1.45
3	CL32C223JBHNNN □		22nF	50	±5%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Product Lineup (General Capacitors-X7R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05B471KB5NNN □	1.00×0.50	470pF	50	±10%	0.55
2	CL05B221KB5NNN □		220pF	50	±10%	0.55
3	CL05B681KB5NNN □		680pF	50	±10%	0.55
4	CL05B102KB5NNN □		1nF	50	±10%	0.55
5	CL05B102KA5NNN □		1nF	25	±10%	0.55
6	CL05B222KB5NNN □		2.2nF	50	±10%	0.55
7	CL05B472KB5NNN □		4.7nF	50	±10%	0.55
8	CL05B472KA5NNN □		4.7nF	25	±10%	0.55
9	CL05B682KB5NNN □		6.8nF	50	±10%	0.55
10	CL05B682KA5NNN □		6.8nF	25	±10%	0.55
11	CL05B103KB5NNN □		10nF	50	±10%	0.55
12	CL05B103KA5NNN □		10nF	25	±10%	0.55
13	CL05B223KA5NNN □		22nF	25	±10%	0.55
14	CL05B473KO5NNN □		47nF	16	±10%	0.55
15	CL05B473KP5NNN □		47nF	10	±10%	0.55
16	CL05B683KO5NNN □		68nF	16	±10%	0.55
17	CL05B683KP5NNN □		68nF	10	±10%	0.55
18	CL05B104KO5NNN □		100nF	16	±10%	0.55
19	CL05B104KP5NNN □		100nF	10	±10%	0.55
20	CL05B104KQ5NNN □		100nF	6.3	±10%	0.55
1	CL10B101KB8NNN □	1.60×0.80	100pF	50	±10%	0.9
2	CL10B221KB8NNN □		220pF	50	±10%	0.9
3	CL10B471KB8NNN □		470pF	50	±10%	0.9
4	CL10B681KB8NNN □		680pF	50	±10%	0.9
5	CL10B102KB8NNN □		1nF	50	±10%	0.9
6	CL10B102KA8NNN □		1nF	25	±10%	0.9
7	CL10B222KB8NNN □		2.2nF	50	±10%	0.9
8	CL10B472KB8NNN □		4.7nF	50	±10%	0.9
9	CL10B472KA8NNN □		4.7nF	25	±10%	0.9
10	CL10B682KB8NNN □		6.8nF	50	±10%	0.9
11	CL10B103KB8NNN □		10nF	50	±10%	0.9
12	CL10B103KA8NNN □		10nF	25	±10%	0.9
13	CL10B223KA8NNN □		22nF	25	±10%	0.9
14	CL10B473KB8NNN □		47nF	50	±10%	0.9
15	CL10B473KA8NNN □		47nF	25	±10%	0.9
16	CL10B683KB8NNN □		68nF	50	±10%	0.9
17	CL10B683KA8NNN □		68nF	25	±10%	0.9
18	CL10B104KB8NNN □		100nF	50	±10%	0.9
19	CL10B224KA8NNN □		220nF	25	±10%	0.9
20	CL10B224KO8NNN □		220nF	16	±10%	0.9
21	CL10B225KQ8NNN □		2.2μF	6.3	±10%	0.9
1	CL21B221KBANNN □	2.00×1.25	220pF	50	±10%	0.75
2	CL21B471KBANNN □		470pF	50	±10%	0.75
3	CL21B681KBANNN □		680pF	50	±10%	0.75
4	CL21B102KBANNN □		1nF	50	±10%	0.75
5	CL21B102KBCNNN □		1nF	50	±10%	0.95
6	CL21B222KBANNN □		2.2nF	50	±10%	0.75
7	CL21B222KBCNNN □		2.2nF	50	±10%	0.95
8	CL21B682KBANNN □		6.8nF	50	±10%	0.75
9	CL21B103KBANNN □		10nF	50	±10%	0.75

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (General Capacitors-X7R)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
10	CL21B103KBCNNN □	2.00×1.25	10nF	50	± 10%	0.95
11	CL21B223KBANNN □		22nF	50	± 10%	0.75
12	CL21B223KBCNNN □		22nF	50	± 10%	0.95
13	CL21B473KBANNN □		47nF	50	± 10%	0.75
14	CL21B473KBCNNN □		47nF	50	± 10%	0.95
15	CL21B683KAANNN □		68nF	25	± 10%	0.75
16	CL21B683KBCNNN □		68nF	50	± 10%	0.95
17	CL21B683KBFNNN □		68nF	50	± 10%	1.35
18	CL21B104KBCNNN □		100nF	50	± 10%	0.95
19	CL21B104KBFNNN □		100nF	50	± 10%	1.35
20	CL21B224KBFNNN □		220nF	50	± 10%	1.35
21	CL21B224KAFNNN □		220nF	25	± 10%	1.35
22	CL21B224KOCNNN □		220nF	16	± 10%	0.95
23	CL21B224KOFNNN □		220nF	16	± 10%	1.35
24	CL21B474KBFNNN □		470nF	50	± 10%	1.35
25	CL21B474KAFNNN □		470nF	25	± 10%	1.35
26	CL21B474KOFNNN □		470nF	16	± 10%	1.35
27	CL21B684KOFNNN □		680nF	16	± 10%	1.35
28	CL21B684KPFNNN □		680nF	10	± 10%	1.35
1	CL31B221KBCNNN □	3.20×1.60	220pF	50	± 10%	1.0
2	CL31B471KBCNNN □		470pF	50	± 10%	1.0
3	CL31B681KBCNNN □		680pF	50	± 10%	1.0
4	CL31B102KBCNNN □		1nF	50	± 10%	1.0
5	CL31B222KBCNNN □		2.2nF	50	± 10%	1.0
6	CL31B472KBCNNN □		4.7nF	50	± 10%	1.0
7	CL31B682KBCNNN □		6.8nF	50	± 10%	1.0
8	CL31B103KBCNNN □		10nF	50	± 10%	1.0
9	CL31B223KBCNNN □		22nF	50	± 10%	1.0
10	CL31B473KBCNNN □		47nF	50	± 10%	1.0
11	CL31B683KBCNNN □		68nF	50	± 10%	1.0
12	CL31B104KBCNNN □		100nF	50	± 10%	1.0
13	CL31B104KACNNN □		100nF	25	± 10%	1.0
14	CL31B224KBCNNN □		220nF	50	± 10%	1.0
15	CL31B224KAFNNN □		220nF	25	± 10%	1.4
16	CL31B474KBFNNN □		470nF	50	± 10%	1.4
17	CL31B474KAHNNN □		470nF	25	± 10%	1.8
18	CL31B474KOCNNN □		470nF	16	± 10%	1.0
19	CL31B684KBHNNN □		680nF	50	± 10%	1.8
20	CL31B684KAHNNN □		680nF	25	± 10%	1.8
21	CL31B105KBHNNN □		1μF	50	± 10%	1.8
22	CL31B105KAHNNN □		1μF	25	± 10%	1.8
23	CL31B105KOFNNN □		1μF	16	± 10%	1.4
24	CL31B225KBHNNN □		2.2μF	50	± 10%	1.8
25	CL31B225KAHNNN □		2.2μF	25	± 10%	1.8
26	CL31B225KOHNNN □		2.2μF	16	± 10%	1.8
27	CL31B225KPFNNN □		2.2μF	10	± 10%	1.4
1	CL32B104KBFNNN □	3.20×2.50	100nF	50	± 10%	1.45
2	CL32B224KBFNNN □		220nF	50	± 10%	1.45
3	CL32B105KBFNNN □		1μF	50	± 10%	1.45
4	CL32B105KAHNNN □		1μF	25	± 10%	1.8

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Product Lineup (General Capacitors-X7R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
5	CL32B225KBINNN □	3.20 × 2.50	2.2 μF	50	± 10%	2.2
6	CL32B225KAJNNN □		2.2 μF	25	± 10%	2.7
7	CL32B474KBFNNN □		470 nF	50	± 10%	1.45
8	CL32B474KAFNNN □		470 nF	25	± 10%	1.45
9	CL32B475KOINNN □		4.7 μF	16	± 10%	2.2
1	CL43B224KBFNNN □	4.50 × 3.20	220 nF	50	± 10%	1.45
2	CL43B474KBFNNN □		470 nF	50	± 10%	1.45
3	CL43B684KBFNNN □		680 nF	50	± 10%	1.45
4	CL43B105KBFNNN □		1 μF	50	± 10%	1.45
5	CL43B106KALNNN □		10 μF	25	± 10%	3.5
6	CL43B226KPJNNN □		22 μF	10	± 10%	2.7
1	CL55B475KBJNNN □	5.70 × 5.00	4.7 μF	50	± 10%	2.7

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Product Lineup (General Capacitors-X5R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05A223KO5NNN □	1.00 × 0.50	22 nF	16	± 10%	0.55
2	CL05A104KA5NNN □		100 nF	25	± 10%	0.55
3	CL05A104KO5NNN □		100 nF	16	± 10%	0.55
4	CL05A104KP5NNN □		100 nF	10	± 10%	0.55
5	CL05A104KQ5NNN □		100 nF	6.3	± 10%	0.55

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification


Application Manual for Surface Mounting

Product Lineup (General Capacitors-Y5V)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05F103ZB5NNN □	1.00×0.50	10nF	50	+80/-20%	0.55
2	CL05F103ZO5NNN □		10nF	16	+80/-20%	0.55
3	CL05F223ZA5NNN □		22nF	25	+80/-20%	0.55
4	CL05F223ZO5NNN □		22nF	16	+80/-20%	0.55
5	CL05F473ZO5NNN □		47nF	16	+80/-20%	0.55
6	CL05F683ZO5NNN □		68nF	16	+80/-20%	0.55
7	CL05F104ZO5NNN □		100nF	16	+80/-20%	0.55
1	CL10F103ZB8NNN □	1.60×0.80	10nF	50	+80/-20%	0.9
2	CL10F223ZB8NNN □		22nF	50	+80/-20%	0.9
3	CL10F473ZB8NNN □		47nF	50	+80/-20%	0.9
4	CL10F473ZA8NNN □		47nF	25	+80/-20%	0.9
5	CL10F473ZO8NNN □		47nF	16	+80/-20%	0.9
6	CL10F683ZB8NNN □		68nF	50	+80/-20%	0.9
7	CL10F104ZB8NNN □		100nF	50	+80/-20%	0.9
8	CL10F104ZA8NNN □		100nF	25	+80/-20%	0.9
9	CL10F224ZB8NNN □		220nF	50	+80/-20%	0.9
10	CL10F224ZA8NNN □		220nF	25	+80/-20%	0.9
11	CL10F225ZP8NNN □		2.2μF	10	+80/-20%	0.9
12	CL10F225ZQ8NNN □		2.2μF	6.3	+80/-20%	0.9
1	CL21F103ZBANNN □	2.00×1.25	10nF	50	+80/-20%	0.75
2	CL21F223ZBANNN □		22nF	50	+80/-20%	0.75
3	CL21F473ZBANNN □		47nF	50	+80/-20%	0.75
4	CL21F683ZBANNN □		68nF	50	+80/-20%	0.75
5	CL21F104ZBANNN □		100nF	50	+80/-20%	0.75
6	CL21F104ZBCNNN □		100nF	50	+80/-20%	0.95
7	CL21F224ZBCNNN □		220nF	50	+80/-20%	0.95
8	CL21F224ZBFNNN □		220nF	50	+80/-20%	1.35
9	CL21F224ZOANNN □		220nF	16	+80/-20%	0.75
10	CL21F474ZACNNN □		470nF	25	+80/-20%	0.95
11	CL21F474ZBFNNN □		470nF	50	+80/-20%	1.35
12	CL21F474ZBFNNN □		470nF	50	+80/-20%	1.35
13	CL21F684ZAFNNN □		680nF	25	+80/-20%	1.35
14	CL21F684ZOANNN □		680nF	16	+80/-20%	0.75
15	CL21F225ZAFNNN □		2.2μF	25	+80/-20%	1.35
16	CL21F225ZOFNNN □		2.2μF	16	+80/-20%	1.35
1	CL31F103ZBCNNN □	3.20×1.60	10nF	50	+80/-20%	1.0
2	CL31F104ZBCNNN □		100nF	50	+80/-20%	1.0
3	CL31F224ZBCNNN □		220nF	50	+80/-20%	1.0
4	CL31F474ZBCNNN □		470nF	50	+80/-20%	1.0
5	CL31F105ZBCNNN □		1μF	50	+80/-20%	1.0
6	CL31F105ZAFNNN □		1μF	25	+80/-20%	1.4
7	CL31F105ZOCNNN □		1μF	16	+80/-20%	1.0
8	CL31F225ZAFNNN □		2.2μF	25	+80/-20%	1.4
9	CL31F225ZOCNNN □		2.2μF	16	+80/-20%	1.0
1	CL32F475ZAHNNN □	3.20×2.50	4.7μF	25	+80/-20%	1.8

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

※ For parts of higher capacitance than those above listed, refer to the product lineup of 'High Capacitance' subcategory.

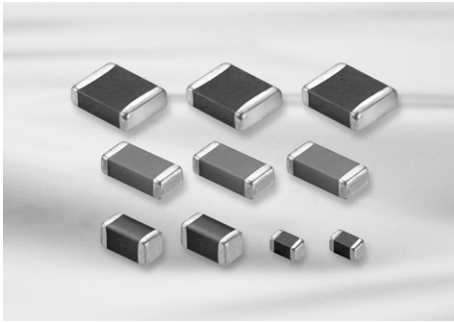

Feature


- Wide selection of size : from 0402 to 1812
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Wide capacitance range
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application

- Desktop PC, Note PC, HHP, DC-DC Converter, DSC
- LCD TV, LCD Monitor

※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

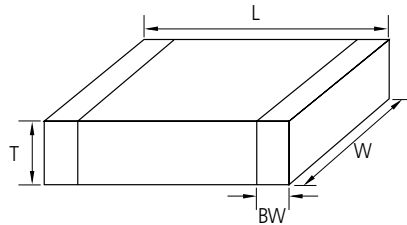

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.50+0.0/-0.1(*)	5	0.30±0.20
		1.60±0.10	0.80±0.10	0.80±0.10	8	
21	0805	2.00±0.10	1.25±0.10	0.85±0.10	C	0.5+0.2/-0.3
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
		2.00±0.15	1.25±0.15	1.25±0.15	Q	
		2.00±0.20	1.25±0.20	1.25±0.20	Y	
31	1206	3.20±0.20	1.60±0.20	0.60±0.10(*)	6	0.50±0.30
		3.20±0.15	1.60±0.15	0.85±0.15	C	
		3.20±0.20	1.60±0.20	0.85±0.10(*)	C	
		3.20±0.20	1.60±0.20	1.15±0.10(*)	P	
		3.20±0.15	1.60±0.15	1.25±0.15	F	
32	1210	3.20±0.20	1.60±0.20	1.60±0.20	H	0.60±0.30
		3.20±0.30	2.50±0.20	0.85±0.10(*)	C	
		3.20±0.30	2.50±0.20	0.90±0.10(*)	9	
		3.20±0.30	2.50±0.20	1.60±0.20	H	
		3.20±0.30	2.50±0.20	1.80±0.20(*)	U	
		3.20±0.30	2.50±0.20	2.00±0.20	I	
42	1808	3.20±0.30	2.50±0.20	2.50±0.20	J	0.80±0.30
		3.20±0.40	2.50±0.30	2.50±0.30	V	
		4.50±0.40	2.00±0.20	1.25±0.20	F	
		4.50±0.40	2.00±0.20	1.40±0.20	G	
43	1812	4.50±0.40	2.00±0.20	2.00±0.20	I	0.80±0.30
		4.50±0.40	3.20±0.30	1.25±0.20	F	
		4.50±0.40	3.20±0.30	2.50±0.20	J	
55	2220	4.50±0.40	3.20±0.30	3.20±0.30	L	0.80±0.30
		5.70±0.40	5.00±0.40	2.50±0.20	J	
		5.70±0.40	5.00±0.40	3.20±0.30	L	

※ * Mark is only applicable to "L" code , 12th code in part number.

* Note : This catalog has only typical specifications because there is no space for detailed specifications.

Please approve our product specifications or transact the approval sheet for product specifications before ordering.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

High Capacitance Table (X5R)

[illegible]

High Capacitance Table_Low Profile (X5R)

Size(mm)	Tmax (mm)	Vr(V)	Capacitance (μF)					
			1	2.2	4.7	10	22	47
0402(1005)	0.3	6.3	X6S					
		10						
		16						
0603(1608)	0.5	6.3						
		10						
		16						
		25						
0805(2012)	0.7	10						
		16						
		25						
	0.95	4						(Tmax=1.0)
		6.3						(Tmax=1.0)
		10						
		16						
		25				X6S		
1206(3216)	0.7	10						
	0.95	6.3						
		10						
		16						
		25			X6S			
		50		(Tmax=1.0)	(Tmax=1.0)			
		100		(Tmax=1.0)				
1210(3225)	0.95	16						
	2.0	25						
		35						
		50						

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

High Capacitance Table (X6S)

[illegible]

High Capacitance Table (X7R)

Size(mm)	Vr(V)	Capacitance (μF)									
		0.1	0.22	0.47	1	2.2	4.7	10	22	47	100
0402(1005)	6.3										
	10			X7S							
	16										
0603(1608)	6.3										
	10										
	16										
	25										
	50										
0805(2012)	6.3										
	10										
	16										
	25						X7S				
	35										
	50										
1206(3216)	6.3										
	10										
	16										
	25										
	35										
	50										
1210(3225)	6.3										X7T
	10										
	16										
	25										
	50										

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

High Capacitance Table (Y5V)

Size(mm)	Vr(V)	Capacitance (μF)									
		0.1	0.22	0.47	1	2.2	4.7	10	22	47	
0402(1005)	6.3										
	10										
	16										
	25										
0603(1608)	6.3										
	10										
	16										
	25										
	50										
0805(2012)	6.3										
	10										
	16										
	25										
	50										
1206(3216)	10										
	16										
	25										
	50										
1210(3225)	6.3										
	10										
	16										
	25										
	35										
	50										

High Capacitance Table -Low Profile (Y5V)

Size(mm)	Vr(V)	Capacitance (μF)					
		1	2.2	4.7	10	22	47
0402(1005)	6.3						
	10						

Product Lineup (High Capacitance-X5R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05A224KQ5NNN □	1.00 × 0.50	0.22 μF	6.3	±10%	0.55
2	CL05A224KR5NNN □		0.22 μF	4	±10%	0.55
3	CL05A224KA5NNN □		0.22 μF	25	±10%	0.55
4	CL05A224KO5NNN □		0.22 μF	16	±10%	0.55
5	CL05A224KP5NNN □		0.22 μF	10	±10%	0.55
6	CL05A334KA5NNN □		0.33 μF	25	±10%	0.55
7	CL05A334KQ5NNN □		0.33 μF	6.3	±10%	0.55
8	CL05A334KR5NNN □		0.33 μF	4	±10%	0.55
9	CL05A474KA5NNN □		0.47 μF	25	±10%	0.55
10	CL05A474KO5NNN □		0.47 μF	16	±10%	0.55
11	CL05A474KP5NNN □		0.47 μF	10	±10%	0.55
12	CL05A474KQ5NNN □		0.47 μF	6.3	±10%	0.55
13	CL05A474KR5NNN □		0.47 μF	4	±10%	0.55
14	CL05A105KA5NQN □		1 μF	25	±10%	0.60
15	CL05A105KO5NNN □		1 μF	16	±10%	0.55
16	CL05A105KO3LQN □		1 μF	16	±10%	0.33
17	CL05A105KP5NNN □		1 μF	10	±10%	0.55
18	CL05A105KP3LNN □		1 μF	10	±10%	0.33
19	CL05A105KQ5NNN □		1 μF	6.3	±10%	0.55
20	CL05A105KQ3LNN □		1 μF	6.3	±10%	0.33
21	CL05A105KR5NNN □		1 μF	4	±10%	0.55
22	CL05A105KR3LNN □		1 μF	4	±10%	0.33
23	CL05A225MA5NUN □		2.2 μF	25	±20%	0.70
24	CL05A225KO5NQN □		2.2 μF	16	±10%	0.60
25	CL05A225MP5NSN □		2.2 μF	10	±20%	0.57
26	CL05A225KP3LRN □		2.2 μF	10	±10%	0.33
27	CL05A225MQ5NNN □		2.2 μF	6.3	±20%	0.55
28	CL05A225KQ3LRN □		2.2 μF	6.3	±10%	0.33
29	CL05A225MR5NNN □		2.2 μF	4	±20%	0.55
30	CL05A225KR3LRN □		2.2 μF	4	±10%	0.33
31	CL05A475MP5NRN □		4.7 μF	10	±20%	0.65
32	CL05A475MQ5NRN □		4.7 μF	6.3	±20%	0.65
33	CL05A475MR5NRN □		4.7 μF	4	±20%	0.65
34	CL05A106MP5NNN □		10 μF	10	±20%	0.55
35	CL05A106MQ5NUN □		10 μF	6.3	±20%	0.70
36	CL05A106MR5NRN □		10 μF	4	±20%	0.65
37	CL05A156MR5NUN □		15 μF	4	±20%	0.70
1	CL10A474KB8NNN □	1.60 × 0.80	0.47 μF	50	±10%	0.90
2	CL10A474KA8NNN □		0.47 μF	25	±10%	0.90
3	CL10A474KP8NNN □		0.47 μF	10	±10%	0.90
4	CL10A474KQ8NNN □		0.47 μF	6.3	±10%	0.90
5	CL10A474KR8NNN □		0.47 μF	4	±10%	0.90
6	CL10A105KB8NNN □		1 μF	50	±10%	0.90
7	CL10A105KA5LNN □		1 μF	25	±10%	0.50
8	CL10A105KA8NNN □		1 μF	25	±10%	0.90
9	CL10A105KO8NNN □		1 μF	16	±10%	0.90
10	CL10A105KO5LNN □		1 μF	16	±10%	0.50
11	CL10A105KP8NNN □		1 μF	10	±10%	0.90
12	CL10A105KP5LNN □		1 μF	10	±10%	0.50
13	CL10A105KQ8NNN □		1 μF	6.3	±10%	0.90
14	CL10A105KQ5LNN □		1 μF	6.3	±10%	0.50

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (High Capacitance-X5R)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
15	CL10A105KR8NNN □	1.60×0.80	1 μF	4	± 10%	0.90
16	CL10A105KR5LNN □		1 μF	4	± 10%	0.50
17	CL10A105KA5LNN □		1 μF	25	± 10%	0.50
18	CL10A225KA8NNN □		2.2 μF	25	± 10%	0.90
19	CL10A225KO8NNN □		2.2 μF	16	± 10%	0.90
20	CL10A225KO5LNN □		2.2 μF	16	± 10%	0.50
21	CL10A225KP8NNN □		2.2 μF	10	± 10%	0.90
22	CL10A225KP5LNN □		2.2 μF	10	± 10%	0.50
23	CL10A225KQ8NNN □		2.2 μF	6.3	± 10%	0.90
24	CL10A225KQ5LNN □		2.2 μF	6.3	± 10%	0.50
25	CL10A225KR8NNN □		2.2 μF	4	± 10%	0.90
26	CL10A225KR5LNN □		2.2 μF	4	± 10%	0.50
27	CL10A335KQ8NNN □		3.3 μF	6.3	± 10%	0.90
28	CL10A335KR8NNN □		3.3 μF	4	± 10%	0.90
29	CL10A475KA8NQ □		4.7 μF	25	± 10%	0.95
30	CL10A475KO8NNN □		4.7 μF	16	± 10%	0.90
31	CL10A475KP8NNN □		4.7 μF	10	± 10%	0.90
32	CL10A475KP5LNN □		4.7 μF	10	± 10%	0.50
33	CL10A475KQ5LNN □		4.7 μF	6.3	± 10%	0.50
34	CL10A475KQ8NNN □		4.7 μF	6.3	± 10%	0.90
35	CL10A475KR5LNN □		4.7 μF	4	± 10%	0.50
36	CL10A475KR8NNN □		4.7 μF	4	± 10%	0.90
37	CL10A106KR8NNN □		10 μF	4	± 10%	0.90
38	CL10A106MR5LRN □		10 μF	4	± 20%	0.50
39	CL10A106KQ8NNN □		10 μF	6.3	± 10%	0.90
40	CL10A106MQ5LRN □		10 μF	6.3	± 20%	0.50
41	CL10A106MP8NNN □		10 μF	10	± 20%	0.90
42	CL10A106MO8NQ □		10 μF	16	± 20%	0.95
43	CL10A106MA8NRN □		10 μF	25	± 20%	1.00
44	CL10A226MR8NRN □		22 μF	4	± 20%	1.00
45	CL10A226MQ8NRN □		22 μF	6.3	± 20%	1.00
46	CL10A226MP8NUN □		22 μF	10	± 20%	1.05
47	CL10A476MR8NZN □		47 μF	4	± 20%	1.10
1	CL21A105KBQNNN □	2.00×1.25	1 μF	50	± 10%	1.40
2	CL21A105KAFNNN □		1 μF	25	± 10%	1.35
3	CL21A105KA6LNN □		1 μF	25	± 10%	0.70
4	CL21A105KOFNNN □		1 μF	16	± 10%	1.35
5	CL21A105KO6LNN □		1 μF	16	± 10%	0.70
6	CL21A105KQFNNN □		1 μF	6.3	± 10%	1.35
7	CL21A105KRFNNN □		1 μF	4	± 10%	1.35
8	CL21A225KBQNNN □		2.2 μF	50	± 10%	1.40
9	CL21A225KAFNNN □		2.2 μF	25	± 10%	1.35
10	CL21A225KO6LNN □		2.2 μF	16	± 10%	0.70
11	CL21A225KOFNNN □		2.2 μF	16	± 10%	1.35
12	CL21A225KPFNNN □		2.2 μF	10	± 10%	1.35
13	CL21A225KQFNNN □		2.2 μF	6.3	± 10%	1.35
14	CL21A225KRFNNN □		2.2 μF	4	± 10%	1.35
15	CL21A475KBQNNN □		4.7 μF	50	± 10%	1.40
16	CL21A475KAQNNN □		4.7 μF	25	± 10%	1.40
17	CL21A475KACLRN □		4.7 μF	25	± 10%	0.95
18	CL21A475KOFNNN □		4.7 μF	16	± 10%	1.35

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 80.

Product Lineup (High Capacitance-X5R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
19	CL21A475KOCLNN □	2.00 × 1.25	4.7 μF	16	±10%	0.95
20	CL21A475KPFNNN □		4.7 μF	10	±10%	1.35
21	CL21A475KPCLNN □		4.7 μF	10	±10%	0.95
22	CL21A475KQFNNN □		4.7 μF	6.3	±10%	1.35
23	CL21A475KQCLNN □		4.7 μF	6.3	±10%	0.95
24	CL21A475KRFNNN □		4.7 μF	4	±10%	1.35
25	CL21A475KRCLNN □		4.7 μF	4	±10%	0.95
26	CL21A106KAYNNN □		10 μF	25	±10%	1.45
27	CL21A106KACLRN □		10 μF	25	±10%	0.95
28	CL21A106KOFNNN □		10 μF	16	±10%	1.35
29	CL21A106KOQNNN □		10 μF	16	±10%	1.40
30	CL21A106KOCLRN □		10 μF	16	±10%	0.95
31	CL21A106KOCL3R □		10 μF	16	±10%	0.95
32	CL21A106KPFNNN □		10 μF	10	±10%	1.35
33	CL21A106KPCLQN □		10 μF	10	±10%	0.95
34	CL21A106KQFNNN □		10 μF	6.3	±10%	1.35
35	CL21A106KQCLNN □		10 μF	6.3	±10%	0.95
36	CL21A106KRFNNN □		10 μF	4	±10%	1.35
37	CL21A106KRCLNN □		10 μF	4	±10%	0.95
38	CL21A226MAQNNN □		22 μF	25	±20%	1.40
39	CL21A226MPQNNN □		22 μF	10	±20%	1.40
40	CL21A226MPCLRN □		22 μF	10	±20%	0.95
41	CL21A226MQQNNN □		22 μF	6.3	±20%	1.40
42	CL21A226MQCLRN □		22 μF	6.3	±20%	0.95
43	CL21A226MRQNNN □		22 μF	4	±20%	1.40
44	CL21A226MRCLRN □		22 μF	4	±20%	0.95
45	CL21A336MQELNN □		33 μF	6.3	±20%	1.20
46	CL21A336MQ9LNN □		33 μF	6.3	±20%	1.00
47	CL21A336MRELNN □		33 μF	4	±20%	1.20
48	CL21A336MR9LNN □		33 μF	4	±20%	1.00
49	CL21A476MQYNNN □		47 μF	6.3	±20%	1.45
50	CL21A476MRYNNN □		47 μF	4	±20%	1.45
51	CL21A476MQ9LRN □		47 μF	6.3	±20%	1.00
1	CL31A225KC9LNN □	3.20 × 1.60	2.2 μF	100	±10%	1.00
2	CL31A475KBHNNN □		4.7 μF	50	±10%	1.80
3	CL31A475KB9LNN □		4.7 μF	50	±10%	1.00
4	CL31A475KAHNNN □		4.7 μF	25	±10%	1.80
5	CL31A475KACLNN □		4.7 μF	25	±10%	0.95
6	CL31A475KOHNNN □		4.7 μF	16	±10%	1.80
7	CL31A475KOCLNN □		4.7 μF	16	±10%	0.95
8	CL31A475KPHNNN □		4.7 μF	10	±10%	1.80
9	CL31A475KQHNNN □		4.7 μF	6.3	±10%	1.80
10	CL31A475KRHNNN □		4.7 μF	4	±10%	1.80
11	CL31A106KBHNNN □		10 μF	50	±10%	1.80
12	CL31A106KAHNNN □		10 μF	25	±10%	1.80
13	CL31A106KACLNN □		10 μF	25	±10%	0.95
14	CL31A106KOHNNN □		10 μF	16	±10%	1.80
15	CL31A106KOCLNN □		10 μF	16	±10%	0.95
16	CL31A106KPHNNN □		10 μF	10	±10%	1.80
17	CL31A106KPCLNN □		10 μF	10	±10%	0.95
18	CL31A106KQHNNN □		10 μF	6.3	±10%	1.80
19	CL31A106KRHNNN □		10 μF	4	±10%	1.80
20	CL31A156KQHNNN □		15 μF	6.3	±10%	1.80

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (High Capacitance-X5R)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
21	CL31A156KRHNNN □	3.20×1.60	15μF	4	±10%	1.80
22	CL31A226KAHNNN □		22μF	25	±10%	1.80
23	CL31A226KOHNNN □		22μF	16	±10%	1.80
24	CL31A226KOCLNN □		22μF	16	±10%	0.95
25	CL31A226KPHNNN □		22μF	10	±10%	1.80
26	CL31A226KPCLNN □		22μF	10	±10%	0.95
27	CL31A226KQHNNN □		22μF	6.3	±10%	1.80
28	CL31A226KRHNNN □		22μF	4	±10%	1.80
29	CL31A476MQHNNN □		47μF	6.3	±20%	1.80
30	CL31A476MRHNNN □		47μF	4	±20%	1.80
31	CL31A107MQHNNN □		100μF	6.3	±20%	1.80
32	CL31A107MRHNNN □		100μF	4	±20%	1.80
1	CL32A106KQCLNN □	3.20×2.50	10μF	6.3	±10%	0.95
2	CL32A106KRCLNN □		10μF	4	±10%	0.95
3	CL32A106KBULNN □		10μF	50	±10%	2.00
4	CL32A106KAJNNN □		10μF	25	±10%	2.70
5	CL32A106KAULNN □		10μF	25	±10%	2.00
6	CL32A106KOJNNN □		10μF	16	±10%	2.70
7	CL32A106KPJNNN □		10μF	10	±10%	2.70
8	CL32A226KAJNNN □		22μF	25	±10%	2.70
9	CL32A226KOJNNN □		22μF	16	±10%	2.70
10	CL32A226KOCLNN □		22μF	16	±10%	0.95
11	CL32A226KPJNNN □		22μF	10	±10%	2.70
12	CL32A226KQJNNN □		22μF	6.3	±10%	2.70
13	CL32A226MQCLNN □		22μF	6.3	±20%	0.95
14	CL32A226KRJNNN □		22μF	4	±10%	2.70
15	CL32A226MRCLNN □		22μF	4	±20%	0.95
16	CL32A476KOJNNN □		47μF	16	±10%	2.70
17	CL32A476KPJNNN □		47μF	10	±10%	2.70
18	CL32A476MQJNNN □		47μF	6.3	±20%	2.70
19	CL32A476MRJNNN □		47μF	4	±20%	2.70
20	CL32A107MPVNNN □		100μF	10	±20%	2.80
21	CL32A107MQVNNN □		100μF	6.3	±20%	2.80
22	CL32A107MRVNNN □		100μF	4	±20%	2.80
23	CL32A157MQVNNN □		150μF	6.3	±20%	2.80
24	CL32A227MQVNNN □		220μF	6.3	±20%	2.80
1	CL43A476MQJNNN □	4.50×3.20	47μF	6.3	±20%	2.70
2	CL43A476MRJNNN □		47μF	4	±20%	2.70
3	CL43A107KQLNNN □		100μF	6.3	±10%	3.50
4	CL43A107KRLNNN □		100μF	4	±10%	3.50

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 80.

Product Lineup (High Capacitance-X6S)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05X224KP5NNN □	1.00 × 0.50	0.22 μF	10	±10%	0.55
2	CL05X224KQ5NNN □		0.22 μF	6.3	±10%	0.55
3	CL05X224KR5NNN □		0.22 μF	4	±10%	0.55
4	CL05X474KP5NNN □		0.47 μF	10	±10%	0.55
5	CL05X474KQ5NNN □		0.47 μF	6.3	±10%	0.55
6	CL05X474KR5NNN □		0.47 μF	4	±10%	0.55
7	CL05X105KP5NNN □		1 μF	10	±10%	0.55
8	CL05X105MQ3LNN □		1 μF	6.3	±20%	0.33
9	CL05X105KQ5NNN □		1 μF	6.3	±10%	0.55
10	CL05X105MR3LNN □		1 μF	4	±20%	0.33
11	CL05X105KR5NNN □		1 μF	4	±10%	0.55
12	CL05X225MQ5NSN □		2.2 μF	6.3	±20%	0.57
13	CL05X225MR5NSN □		2.2 μF	4	±20%	0.57
1	CL10X474KA8NNN □	1.60 × 0.80	0.47 μF	25	±10%	0.90
2	CL10X474KO8NNN □		0.47 μF	16	±10%	0.90
3	CL10X474KP8NNN □		0.47 μF	10	±10%	0.90
4	CL10X474KQ8NNN □		0.47 μF	6.3	±10%	0.90
5	CL10X474KR8NNN □		0.47 μF	4	±10%	0.90
6	CL10X105KA8NNN □		1 μF	25	±10%	0.90
7	CL10X105KO8NNN □		1 μF	16	±10%	0.90
8	CL10X105KP8NNN □		1 μF	10	±10%	0.90
9	CL10X105KQ8NNN □		1 μF	6.3	±10%	0.90
10	CL10X105KR8NNN □		1 μF	4	±10%	0.90
11	CL10X225KA8NQN □		2.2 μF	25	±10%	0.95
12	CL10X225KO8NNN □		2.2 μF	16	±10%	0.90
13	CL10X225KP8NNN □		2.2 μF	10	±10%	0.90
14	CL10X225KQ8NNN □		2.2 μF	6.3	±10%	0.90
15	CL10X225KR8NNN □		2.2 μF	4	±10%	0.90
16	CL10X475KA8NQN □		4.7 μF	25	±10%	0.95
17	CL10X475KO8NQN □		4.7 μF	16	±10%	0.95
18	CL10X475KP5NNN □		4.7 μF	10	±10%	0.90
19	CL10X475KQ8NNN □		4.7 μF	6.3	±10%	0.90
20	CL10X475KR8NNN □		4.7 μF	4	±10%	0.90
21	CL10X106MP8NNN □		10 μF	10	±20%	0.90
22	CL10X106KQ8NNN □		10 μF	6.3	±10%	0.90
23	CL10X106KR8NNN □		10 μF	4	±10%	0.90
1	CL21X105KAFNNN □	2.00 × 1.25	1 μF	25	±10%	1.35
2	CL21X105KOFNNN □		1 μF	16	±10%	1.35
3	CL21X105KPFNNN □		1 μF	10	±10%	1.35
4	CL21X105KQFNNN □		1 μF	6.3	±10%	1.35
5	CL21X105KRFNNN □		1 μF	4	±10%	1.35
6	CL21X225KAFNNN □		2.2 μF	25	±10%	1.35
7	CL21X225KOFNNN □		2.2 μF	16	±10%	1.35
8	CL21X225KPFNNN □		2.2 μF	10	±10%	1.35
9	CL21X225KQFNNN □		2.2 μF	6.3	±10%	1.35
10	CL21X225KRFNNN □		2.2 μF	4	±10%	1.35
11	CL21X475KAQNNN □		4.7 μF	25	±10%	1.40
12	CL21X475KOFNNN □		4.7 μF	16	±10%	1.35
13	CL21X475KPFNNN □		4.7 μF	10	±10%	1.35
14	CL21X475KQFNNN □		4.7 μF	6.3	±10%	1.35

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 80.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (High Capacitance -X6S)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
15	CL21X475KRFNNN □	2.00×1.25	4.7μF	4	±10%	1.35
16	CL21X106KACLRN □		10μF	25	±10%	0.95
17	CL21X106KAYNNN □		10μF	25	±10%	1.45
18	CL21X106KOYNNN □		10μF	16	±10%	1.45
19	CL21X106KPCLNN □		10μF	10	±10%	0.95
20	CL21X106KPYNNN □		10μF	10	±10%	1.45
21	CL21X106KQNNNN □		10μF	6.3	±10%	1.40
22	CL21X106KRQNNN □		10μF	4	±10%	1.40
23	CL21X106KRCLNN □		10μF	4	±10%	0.95
24	CL21X226MQNNNN □		22μF	6.3	±20%	1.40
25	CL21X226MRQNNN □		22μF	4	±20%	1.40
26	CL21X476MRYNNN □		47μF	4	±20%	1.45
1	CL31X475KAHNNN □	3.20×1.60	4.7μF	25	±10%	1.80
2	CL31X475KACLNN □		4.7μF	25	±10%	0.95
3	CL31X475KOHNNN □		4.7μF	16	±10%	1.80
4	CL31X475KPHNNN □		4.7μF	10	±10%	1.80
5	CL31X475MQHNNN □		4.7μF	6.3	±20%	1.80
6	CL31X475KRHNNN □		4.7μF	4	±10%	1.80
7	CL31X106KACLNN □		10μF	25	±10%	0.95
8	CL31X106KAHNNN □		10μF	25	±10%	1.80
9	CL31X106KOHNNN □		10μF	16	±10%	1.80
10	CL31X106KPHNNN □		10μF	10	±10%	1.80
11	CL31X106KQHNNN □		10μF	6.3	±10%	1.80
12	CL31X106KRHNNN □		10μF	4	±10%	1.80
13	CL31X226KOHNNN □		22μF	16	±10%	1.80
14	CL31X226KPHNNN □		22μF	10	±10%	1.80
15	CL31X226KQHNNN □		22μF	6.3	±10%	1.80
16	CL31X226KRHNNN □		22μF	4	±10%	1.80
17	CL31X107MQHNNN □		100μF	6.3	±20%	1.80
18	CL31X107MRHNNN □		100μF	4	±20%	1.80
1	CL32X106KAUNNN □	3.20×2.50	10μF	25	±10%	2.00
2	CL32X106KOJNNN □		10μF	16	±10%	2.70
3	CL32X106KPJNNN □		10μF	10	±10%	2.70
4	CL32X106KQJNNN □		10μF	6.3	±10%	2.70
5	CL32X106KRJNNN □		10μF	4	±10%	2.70
6	CL32X226KAJNNN □		22μF	25	±10%	2.70
7	CL32X226KOJNNN □		22μF	16	±10%	2.70
8	CL32X226KPJNNN □		22μF	10	±10%	2.70
9	CL32X226KQJNNN □		22μF	6.3	±10%	2.70
10	CL32X226KRJNNN □		22μF	4	±10%	2.70
11	CL32X476MPJNNN □		47μF	10	±20%	2.70
12	CL32X476KQJNNN □		47μF	6.3	±10%	2.70
13	CL32X476KRJNNN □		47μF	4	±10%	2.70
14	CL32X107MQVNNN □		100μF	6.3	±20%	2.80
15	CL32X107MRVNNN □		100μF	4	±20%	2.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Product Lineup (High Capacitance -X7R, X7S)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05B224KO5NNN □	1.00 × 0.50	0.22 μF	16	±10%	0.55
2	CL05B224KP5NNN □		0.22 μF	10	±10%	0.55
3	CL05B224KQ5NNN □		0.22 μF	6.3	±10%	0.55
4	CL05B474KP5NNN □		0.47 μF	10	±10%	0.55
5	CL05B105KQ5NQN □		1 μF	6.3	±10%	0.60
1	CL05Y474KP5NNN □	1.00 × 0.50	0.47 μF	10	±10%	0.55
1	CL10B474KA8NNN □	1.60 × 0.80	0.47 μF	25	±10%	0.90
2	CL10B474KO8NNN □		0.47 μF	16	±10%	0.90
3	CL10B474KP8NNN □		0.47 μF	10	±10%	0.90
4	CL10B474KQ8NNN □		0.47 μF	6.3	±10%	0.90
5	CL10B105KA8NNN □		1 μF	25	±10%	0.90
6	CL10B105KO8NNN □		1 μF	16	±10%	0.90
7	CL10B105KP8NNN □		1 μF	10	±10%	0.90
8	CL10B105KQ8NNN □		1 μF	6.3	±10%	0.90
9	CL10B225KP8NNN □		2.2 μF	10	±10%	0.90
10	CL10B225KQ8NNN □		2.2 μF	6.3	±10%	0.90
11	CL10B106MQ8NRN □	2.00 × 1.25	10 μF	6.3	±20%	1.00
1	CL21B105KBFNNN □		1 μF	50	±10%	1.35
2	CL21B105KLFNNN □		1 μF	35	±10%	1.35
3	CL21B105KAFNNN □		1 μF	25	±10%	1.35
4	CL21B105KOFNNN □		1 μF	16	±10%	1.35
5	CL21B105KPFNNN □		1 μF	10	±10%	1.35
6	CL21B105KQFNNN □		1 μF	6.3	±10%	1.35
7	CL21B225KAFNNN □		2.2 μF	25	±10%	1.35
8	CL21B225KOFNNN □		2.2 μF	16	±10%	1.35
9	CL21B225KPFNNN □		2.2 μF	10	±10%	1.35
10	CL21B225KQFNNN □		2.2 μF	6.3	±10%	1.35
11	CL21B475KOFNFN □		4.7 μF	16	±10%	1.35
12	CL21B475KPFNFN □		4.7 μF	10	±10%	1.35
13	CL21B475KQNNN □		4.7 μF	6.3	±10%	1.40
14	CL21B106KAYNNN □		10 μF	25	±10%	1.45
15	CL21B106KOQNNN □		10 μF	16	±10%	1.40
16	CL21B106KPQNNN □		10 μF	10	±10%	1.40
17	CL21B106KQQNNN □		10 μF	6.3	±10%	1.40
18	CL21B226MQQNN □	3.20 × 1.60	22 μF	6.3	±20%	1.40
1	CL31B475KBHNNN □		4.7 μF	50	±10%	1.80
2	CL31B475KLHNNN □		4.7 μF	35	±10%	1.80
3	CL31B475KAHNNN □		4.7 μF	25	±10%	1.80
4	CL31B475KOHNNN □		4.7 μF	16	±10%	1.80
5	CL31B475KPHNNN □		4.7 μF	10	±10%	1.80
6	CL31B475KQHNNN □		4.7 μF	6.3	±10%	1.80
7	CL31B106KLHNNN □		10 μF	35	±10%	1.80
8	CL31B106KAHNNN □		10 μF	25	±10%	1.80
9	CL31B106KOHNNN □		10 μF	16	±10%	1.80
10	CL31B106KPHNNN □		10 μF	10	±10%	1.80
11	CL31B106KQHNNN □		10 μF	6.3	±10%	1.80
12	CL31B226KPHNNN □	3.20 × 2.50	22 μF	10	±10%	1.80
1	CL32B106KBJNNN □		10 μF	50	±10%	2.70
2	CL32B106KAJNNN □		10 μF	25	±10%	2.70
3	CL32B106KOJNNN □		10 μF	16	±10%	2.70
4	CL32B106KPIJNNN □		10 μF	10	±10%	2.20
5	CL32B106KQJNNN □		10 μF	6.3	±10%	2.70
6	CL32B226KAJNNN □		22 μF	25	±10%	2.70
7	CL32B226KOJNNN □		22 μF	16	±10%	2.70
8	CL32B226KPIJNNN □		22 μF	10	±10%	2.70
9	CL32B226KQJNNN □		22 μF	6.3	±10%	2.70
10	CL32B476MQJNNN □		47 μF	6.3	±20%	2.70


※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (High Capacitance -Y5V)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05F224ZO5NNN □	1.00×0.50	0.22μF	16	+80/-20%	0.55
2	CL05F224ZP5NNN □		0.22μF	10	+80/-20%	0.55
3	CL05F224ZQ5NNN □		0.22μF	6.3	+80/-20%	0.55
4	CL05F474ZP5NNN □		0.47μF	10	+80/-20%	0.55
5	CL05F474ZQ5NNN □		0.47μF	6.3	+80/-20%	0.55
6	CL05F105ZQ5NNN □		1μF	6.3	+80/-20%	0.55
1	CL10F474ZB8NNN □	1.60×0.80	0.47μF	50	+80/-20%	0.90
2	CL10F474ZA8NNN □		0.47μF	25	+80/-20%	0.90
3	CL10F474ZO8NNN □		0.47μF	16	+80/-20%	0.90
4	CL10F474ZP8NNN □		0.47μF	10	+80/-20%	0.90
5	CL10F105ZO8NNN □		1μF	16	+80/-20%	0.90
6	CL10F105ZP8NNN □		1μF	10	+80/-20%	0.90
7	CL10F225ZP8NNN □		2.2μF	10	+80/-20%	0.90
8	CL10F225ZQ8NNN □		2.2μF	6.3	+80/-20%	0.90
9	CL10F475ZQ8NNN □		4.7μF	6.3	+80/-20%	0.90
1	CL21F105ZB8NNN □	2.00×1.25	1μF	50	+80/-20%	1.35
2	CL21F105ZAFNNN □		1μF	25	+80/-20%	1.35
3	CL21F105ZOFNNN □		1μF	16	+80/-20%	1.35
4	CL21F225ZAFNNN □		2.2μF	25	+80/-20%	1.35
5	CL21F225ZOFNNN □		2.2μF	16	+80/-20%	1.35
6	CL21F475ZQFNNN □		4.7μF	6.3	+80/-20%	1.35
7	CL21F475ZOFNNN □		4.7μF	16	+80/-20%	1.35
8	CL21F475ZPFNNN □		4.7μF	10	+80/-20%	1.35
9	CL21F106ZPFNNN □		10μF	10	+80/-20%	1.35
10	CL21F106ZPCLNN □		10μF	10	+80/-20%	0.95
11	CL21F106ZQFNNN □		10μF	6.3	+80/-20%	1.35
12	CL21F106ZQCLNN □		10μF	6.3	+80/-20%	0.95
1	CL31F475ZOHNNN □	3.20×1.60	4.7μF	16	+80/-20%	1.80
2	CL31F475ZPHNNN □		4.7μF	10	+80/-20%	1.80
3	CL31F475ZQHNNN □		4.7μF	6.3	+80/-20%	1.80
4	CL31F106ZOHNNN □		10μF	16	+80/-20%	1.80
5	CL31F106ZPHNNN □		10μF	10	+80/-20%	1.80
6	CL31F106ZQHNNN □		10μF	6.3	+80/-20%	1.80
7	CL31F226ZPHNNN □		22μF	10	+80/-20%	1.80
8	CL31F226ZQHNNN □		22μF	6.3	+80/-20%	1.80
1	CL32F106ZAHNNN □	3.20×2.50	10μF	25	+80/-20%	1.80
2	CL32F106ZOELNN □		10μF	16	+80/-20%	2.00
3	CL32F226ZPJNNN □		22μF	10	+80/-20%	2.70
4	CL32F226ZPULNN □		22μF	10	+80/-20%	2.00
5	CL32F476ZQJNNN □		47μF	6.3	+80/-20%	2.70
6	CL32F107ZQJNNN □		100μF	6.3	+80/-20%	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

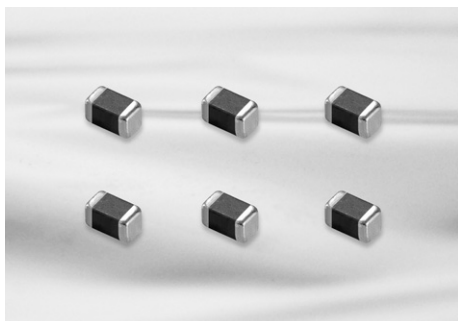


Feature

- Small chip size
- 03 Series(COG) MLCC shows very low ESR value.
- 02 and 03 Series are suited to only reflow soldering
- 02 and 03 Series are suited to miniature RF module, portable equipment and high frequency circuit

Application

- VCO, Tuner, RF Module
 - MCM Module
 - Mobile phone, Wireless LAN, Note PC
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

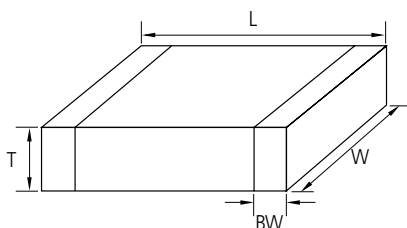

Code	EIA Code	Dimension(mm)			
		L	W	T	BW
02	01005	0.4 ± 0.02	0.2 ± 0.02	0.2 ± 0.02	0.07~0.14
03	0201	0.6 ± 0.03	0.3 ± 0.03	0.3 ± 0.03	0.15 ± 0.05

* Note : This catalog has only typical specifications because there is no space for detailed specifications.
Please approve our product specifications or transact the approval sheet for product specifications before ordering.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Super Small Size Capacitance Table (C0G)

TC	Size (mm)	Vr(V)	Capacitance (pF)							
			0.5	1	10	22	47	100	220	330
C0G	01005(0402)	6.3								
		16								
	0201(0603)	25								
		50				20pF				

Super Small Size Capacitance Table (X7R)

TC	Size (mm)	Vr(V)	Capacitance (nF)							
			0.1	0.22	0.47	1	2.2	4.7	10	22
X7R	01005(0402)	10								
	0201(0603)	10								
		16								

Super Small Size Capacitance Table (X5R, Y5V)

TC	Size (mm)	Vr(V)	Capacitance (μF)							
			0.01	0.1	0.22	0.47	1	2.2	4.7	10
X5R	01005(0402)	6.3								
		10								
		16								
	0201(0603)	4		X5R or X6S						
		6.3								
		10								
		16								
		25								
Y5V	0201(0603)	6.3								

Product Lineup (Super Small Size Capacitors -C0G)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)	
1	CL02C0R5CO2ANN □	0.40 × 0.20	0.5 pF	16	±0.25 pF	0.22	
2	CL02C010CO2ANN □		1.0 pF	16	±0.25 pF	0.22	
3	CL02C1R2CO2ANN □		1.2 pF	16	±0.25 pF	0.22	
4	CL02C1R5CO2ANN □		1.5 pF	16	±0.25 pF	0.22	
5	CL02C1R8CO2ANN □		1.8 pF	16	±0.25 pF	0.22	
6	CL02C020CO2ANN □		2.0 pF	16	±0.25 pF	0.22	
7	CL02C2R2CO2ANN □		2.2 pF	16	±0.25 pF	0.22	
8	CL02C2R7CO2ANN □		2.7 pF	16	±0.25 pF	0.22	
9	CL02C030CO2ANN □		3.0 pF	16	±0.25 pF	0.22	
10	CL02C3R3CO2ANN □		3.3 pF	16	±0.25 pF	0.22	
11	CL02C3R9CO2ANN □		3.9 pF	16	±0.25 pF	0.22	
12	CL02C4R7CO2ANN □		4.7 pF	16	±0.25 pF	0.22	
13	CL02C5R6DO2ANN □		5.6 pF	16	±0.5 pF	0.22	
14	CL02C6R8DO2ANN □		6.8 pF	16	±0.5 pF	0.22	
15	CL02C8R2DO2ANN □		8.2 pF	16	±0.5 pF	0.22	
16	CL02C090DO2ANN □		9.0 pF	16	±0.5 pF	0.22	
17	CL02C100JO2ANN □		10 pF	16	±5%	0.22	
18	CL02C150JO2ANN □		15 pF	16	±5%	0.22	
19	CL02C180JO2ANN □		18 pF	16	±5%	0.22	
20	CL02C220JO2ANN □		22 pF	16	±5%	0.22	
21	CL02C270JO2ANN □		27 pF	16	±5%	0.22	
22	CL02C330JO2ANN □		33 pF	16	±5%	0.22	
23	CL02C390JO2ANN □		39 pF	16	±5%	0.22	
24	CL02C470JO2ANN □		47 pF	16	±5%	0.22	
25	CL02C560JQ2ANN □		56 pF	6.3	±5%	0.22	
26	CL02C680JQ2ANN □		68 pF	6.3	±5%	0.22	
27	CL02C820JQ2ANN □		82 pF	6.3	±5%	0.22	
28	CL02C101JQ2ANN □		100 pF	6.3	±5%	0.22	
1	CL03C0R5CA3GNN □	0.60 × 0.30	0.5 pF	25	±0.25 pF	0.33	High-Q
2	CL03C010CA3GNN □		1.0 pF	25	±0.25 pF	0.33	High-Q
3	CL03C1R2CA3GNN □		1.2 pF	25	±0.25 pF	0.33	High-Q
4	CL03C1R5CA3GNN □		1.5 pF	25	±0.25 pF	0.33	High-Q
5	CL03C1R8CA3GNN □		1.8 pF	25	±0.25 pF	0.33	High-Q
6	CL03C020CA3GNN □		2.0 pF	25	±0.25 pF	0.33	High-Q
7	CL03C2R2CA3GNN □		2.2 pF	25	±0.25 pF	0.33	High-Q
8	CL03C2R7CA3GNN □		2.7 pF	25	±0.25 pF	0.33	High-Q
9	CL03C030CA3GNN □		3.0 pF	25	±0.25 pF	0.33	High-Q
10	CL03C3R3CA3GNN □		3.3 pF	25	±0.25 pF	0.33	High-Q
11	CL03C3R9CA3GNN □		3.9 pF	25	±0.25 pF	0.33	High-Q
12	CL03C4R7CA3GNN □		4.7 pF	25	±0.25 pF	0.33	High-Q
13	CL03C5R6DA3GNN □		5.6 pF	25	±0.5 pF	0.33	High-Q
14	CL03C6R8DA3GNN □		6.8 pF	25	±0.5 pF	0.33	High-Q
15	CL03C8R2DA3GNN □		8.2 pF	25	±0.5 pF	0.33	High-Q
16	CL03C090DA3GNN □		9.0 pF	25	±0.5 pF	0.33	High-Q
17	CL03C100JA3GNN □		10 pF	25	±5%	0.33	High-Q
18	CL03C150JA3ANN □		15 pF	25	±5%	0.33	High-Q
19	CL03C180JA3ANN □		18 pF	25	±5%	0.33	High-Q
20	CL03C220JA3ANN □		22 pF	25	±5%	0.33	High-Q
21	CL03C270JA3ANN □		27 pF	25	±5%	0.33	High-Q
22	CL03C330JA3ANN □		33 pF	25	±5%	0.33	High-Q
23	CL03C390JA3ANN □		39 pF	25	±5%	0.33	
24	CL03C470JA3ANN □		47 pF	25	±5%	0.33	
25	CL03C101JA3ANN □		100 pF	25	±5%	0.33	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (Super Small Size Capacitors -X7R)


	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL02B101KP2NNN □	0.40×0.20	100pF	10	±10%	0.22
2	CL02B151KP2NNN □		150pF	10	±10%	0.22
3	CL02B221KP2NNN □		220pF	10	±10%	0.22
4	CL02B331KP2NNN □		330pF	10	±10%	0.22
5	CL02B471KP2NNN □		470pF	10	±10%	0.22
6	CL02B681KP2NNN □		680pF	10	±10%	0.22
7	CL02B102KP2NNN □		1nF	10	±10%	0.22
1	CL03B331KO3NNN □	0.60×0.30	330pF	16	±10%	0.33
2	CL03B102KO3NNN □		1nF	16	±10%	0.33
3	CL03B472KQ3NNN □		4.7nF	6.3	±10%	0.33
4	CL03B103KP3NNN □		10nF	10	±10%	0.33

Product Lineup (Super Small Size Capacitors -X5R)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL02A151KQ2NNN □	0.40×0.20	150pF	6.3	±10%	0.22
2	CL02A221KQ2NNN □		220pF	6.3	±10%	0.22
3	CL02A331KQ2NNN □		330pF	6.3	±10%	0.22
4	CL02A471KQ2NNN □		470pF	6.3	±10%	0.22
5	CL02A681KQ2NNN □		680pF	6.3	±10%	0.22
6	CL02A102KQ2NNN □		1nF	6.3	±10%	0.22
7	CL02A152KQ2NNN □		1.5nF	6.3	±10%	0.22
8	CL02A222KQ2NNN □		2.2nF	6.3	±10%	0.22
9	CL02A332KQ2NNN □		3.2nF	6.3	±10%	0.22
10	CL02A472KQ2NNN □		4.7nF	6.3	±10%	0.22
11	CL02A682KQ2NNN □		6.8nF	6.3	±10%	0.22
12	CL02A103KQ2NNN □		10nF	6.3	±10%	0.22
13	CL02A104KQ2NNN □		100nF	6.3	±10%	0.22
1	CL03A103KP3NNN □	0.60×0.30	10nF	10	±10%	0.33
2	CL03A223KQ3NNN □		22nF	6.3	±10%	0.33
3	CL03A473KQ3NNN □		47nF	6.3	±10%	0.33
4	CL03A104MA3NNN □		100nF	25	±20%	0.33
5	CL03A104KO3NNN □		100nF	16	±10%	0.33
6	CL03A104KP3NNN □		100nF	10	±10%	0.33
7	CL03A104KQ3NNN □		100nF	6.3	±10%	0.33
8	CL03A224KQ3NNN □		220nF	6.3	±10%	0.33
9	CL03A224KP3NNN □		220nF	10	±10%	0.33
10	CL03A105MQ3CSN □		1μF	6.3	±20%	0.35
11	CL03A105MP3NSN □		1μF	10	±20%	0.35
12	CL03A225MR3CRN □		2.2μF	4	±20%	0.39
13	CL03A225MQ3CRN □		2.2μF	6.3	±20%	0.39

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Medium-High Voltage Capacitors

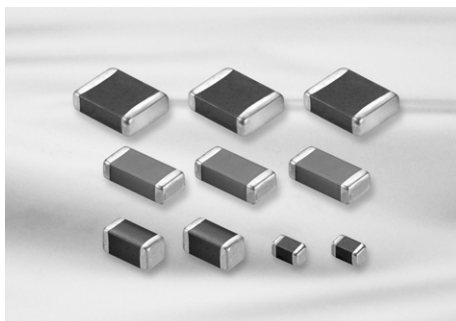

Feature


- Highly reliable performance
- Operating at high voltage level
- Wide voltage level: from 100V to 3000V
- High withstanding voltage
- Tape & reel surface mount assembly

Application

- Switching Power Circuit(SMPS)
- Lighting Ballast, LCD back lighting inverter
- DC-DC converter input filter, snubber circuit
- Phone, Fax, Modem
- Network(IEEE802.3)

※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

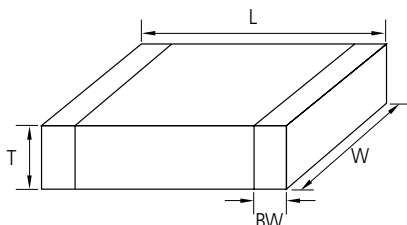

Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
10	0603	1.60 ± 0.10	0.80 ± 0.10	0.80 ± 0.10	8	0.3 ± 0.2
21	0805	2.00 ± 0.10	1.25 ± 0.10	1.25 ± 0.10	F	$0.5+0.2/-0.3$
		2.00 ± 0.10	1.25 ± 0.10	0.85 ± 0.10	C	
		2.00 ± 0.10	1.25 ± 0.10	0.65 ± 0.10	A	
31	1206	3.20 ± 0.20	1.60 ± 0.20	1.60 ± 0.20	H	0.5 ± 0.3
		3.20 ± 0.15	1.60 ± 0.15	1.25 ± 0.15	F	
		3.20 ± 0.15	1.60 ± 0.15	0.85 ± 0.15	C	
32	1210	3.20 ± 0.30	2.50 ± 0.20	2.50 ± 0.20	J	0.6 ± 0.3
		3.20 ± 0.30	2.50 ± 0.20	1.60 ± 0.20	H	
		3.20 ± 0.30	2.50 ± 0.20	1.25 ± 0.20	F	
42	1808	4.50 ± 0.40	2.00 ± 0.20	2.00 ± 0.20	I	0.8 ± 0.3
		4.50 ± 0.40	2.00 ± 0.20	1.60 ± 0.20	H	
		4.50 ± 0.40	2.00 ± 0.20	1.25 ± 0.20	F	
43	1812	4.50 ± 0.40	3.20 ± 0.30	2.50 ± 0.20	J	0.8 ± 0.3
		4.50 ± 0.40	3.20 ± 0.30	1.60 ± 0.20	H	
		4.50 ± 0.40	3.20 ± 0.30	1.25 ± 0.20	F	
55	2220	5.70 ± 0.40	5.00 ± 0.40	2.50 ± 0.20	J	1.0 ± 0.3
		5.70 ± 0.40	5.00 ± 0.40	1.60 ± 0.20	H	

* Note : This catalog has only typical specifications because there is no space for detailed specifications.
Please approve our product specifications or transact the approval sheet for product specifications before ordering.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Medium-High Voltage Capacitors Table (C0G)

Vr	Size(mm)	Capacitance																											
		(pF)							(nF)																				
		330	390	470	560	680	820	1	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2	10	12	15	18	22	27	33	47	56	68
100V	0603(1608)																												
	0805(2012)																												
	1206(3216)																												
	1210(3225)																												
	1812(4532)																												
	2220(5750)																												
200V	0603(1608)																												
	0805(2012)																												
	1206(3216)																												
	1210(3225)																												
	1812(4532)																												
	2220(5750)																												
250V	0603(1608)																												
	0805(2012)																												
	1206(3216)																												
	1210(3225)																												
	1812(4532)																												
	2220(5750)																												
500V	1206(3216)																												
	1210(3225)																												
	1812(4532)																												
	2220(5750)																												
630V	0805(2012)																												
	1206(3216)																												
	1210(3225)																												
	1812(4532)																												
	2220(5750)																												

Medium-High Voltage Capacitors Table (C0G)

Vr	Size(mm)	Capacitance																											
		(pF)																(nF)											
		47	56	68	82	100	120	150	180	220	270	330	390	470	560	680	820	1	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6		
1KV	1206(3216)																												
	1210(3225)																												
	1812(4532)																												
	2220(5750)																	3.6nF											
2KV	1206(3216)																												
	1210(3225)																												
	1808(4520)																												
	1812(4532)																												
	2220(5750)																												
3KV	1808(4520)																												
	1812(4532)																												
	2220(5750)																												

- Part Numbering System
- General Capacitors
- High Capacitance Capacitors
- Super Small Size Capacitors
- Medium-High Voltage Capacitors
- Array Type Capacitors
- Low ESL Capacitors
- Reliability Test Condition
- Premium Capacitors for Automotive Applications
- Packaging Specification
- Application Manual for Surface Mounting

Medium-High Voltage Capacitors Table (X7R)

Vr(V)	Size(mm)	Capacitance (nF)																
		4.7	10	15	22	33	47	68	100	150	220	330	470	680	1000	1500	2200	4700
100V	0603(1608)																	
	0805(2012)																	
	1206(3216)																	
	1210(3225)																	
	1812(4532)																	
	2220(5750)																	
200V	0805(2012)																	
	1206(3216)																	
	1210(3225)																	
	1812(4532)																	
	2220(5750)																	
250V	0805(2012)																	
	1206(3216)																	
	1210(3225)																	
	1812(4532)																	
	2220(5750)																	
350V	1206(3216)	(Tmax=1.0) (Tmax=1.25) (Tmax=1.8)																
500V	1206(3216)																	
	1210(3225)																	
	1812(4532)																	
	2220(5750)																	
630V	1206(3216)																	
	1210(3225)																	
	1812(4532)																	
	2220(5750)																	

Medium-High Voltage Capacitors Table (X7R)

Vr(V)	Size(mm)	Capacitance (nF)															
		1	1.5	2.2	3.3	4.7	6.8	10	15	22	33	47	68	100	150	220	330
1K	1206(3216)																
	1210(3225)																
	1812(4532)																
	2220(5750)																
2KV	1206(3216)																
	1210(3225)																
	1808(4520)																
	1812(4532)																
	2220(5750)																
3KV	1808(4520)																

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Product Lineup (Medium-High Voltage Capacitors-C0G)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL10C100JC8NNN □	1.60×0.80	10pF	100	±5%	0.90
2	CL10C150JC8NNN □		15pF	100	±5%	0.90
3	CL10C330JC8NNN □		33pF	100	±5%	0.90
4	CL10C390JC8NNN □		39pF	100	±5%	0.90
5	CL10C470JC8NNN □		47pF	100	±5%	0.90
6	CL10C560JC8NNN □		56pF	100	±5%	0.90
7	CL10C101JC8NNN □		100pF	100	±5%	0.90
8	CL10C121JC8NNN □		120pF	100	±5%	0.90
9	CL10C151JC8NNN □		150pF	100	±5%	0.90
10	CL10C331JC8NNN □		330pF	100	±5%	0.90
11	CL10C331JD8NNN □		330pF	200	±5%	0.90
12	CL10C331JE8NNN □		330pF	250	±5%	0.90
13	CL10C391JD8NNN □		390pF	200	±5%	0.90
14	CL10C391JE8NNN □		390pF	250	±5%	0.90
15	CL10C471JC8NNN □		470pF	100	±5%	0.90
16	CL10C471JD8NNN □		470pF	200	±5%	0.90
17	CL10C471JE8NNN □		470pF	250	±5%	0.90
18	CL10C561JD8NNN □		560pF	200	±5%	0.90
19	CL10C561JE8NNN □		560pF	250	±5%	0.90
20	CL10C681JC8NNN □		680pF	100	±5%	0.90
21	CL10C681JD8NNN □		680pF	200	±5%	0.90
22	CL10C681JE8NNN □		680pF	250	±5%	0.90
23	CL10C821JC8NNN □		820pF	100	±5%	0.90
24	CL10C102JC8NNN □		1nF	100	±5%	0.90
25	CL10C122JC8NNN □		1.2nF	100	±5%	0.90
1	CL21C100JCANNN □	2.00×1.25	10pF	100	±5%	0.75
2	CL21C120JCANNN □		12pF	100	±5%	0.75
3	CL21C150JCANNNC □		15pF	100	±5%	0.75
4	L21C150JDCNNN □		15pF	200	±5%	0.95
5	CL21C180JCANNN □		18pF	100	±5%	0.75
6	CL21C180JDCNNN □		18pF	200	±5%	0.95
7	CL21C220JCANNN □		22pF	100	±5%	0.75
8	CL21C270JCANNN □		27pF	100	±5%	0.75
9	CL21C270JHFNNN □		27pF	630	±5%	1.35
10	CL21C330JCANNN □		33pF	100	±5%	0.75
11	CL21C330JDCNNN □		33pF	200	±5%	0.95
12	CL21C330JHFNNN □		33pF	630	±5%	1.35
13	CL21C390JDCNNN □		39pF	200	±5%	0.95
14	CL21C470JCANNN □		47pF	100	±5%	0.75
15	CL21C470JDCNNN □		47pF	200	±5%	0.95
16	CL21C470JHFNNN □		47pF	630	±5%	1.35
17	CL21C560JCCNNN □		56pF	100	±5%	0.95
18	CL21C560JDCNNN □		56pF	200	±5%	0.95
19	CL21C680JCANNN □		68pF	100	±5%	0.75
20	CL21C680JDCNNN □		68pF	200	±5%	0.95
21	CL21C680JHFNNN □		68pF	630	±5%	1.35
22	CL21C820JCCNNN □		82pF	100	±5%	0.95
23	CL21C101JCANNN □		100pF	100	±5%	0.75
24	CL21C101JDCNNN □		100pF	200	±5%	0.95
25	CL21C101JECNNN □		100pF	250	±5%	0.95

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Product Lineup (Medium-High Voltage Capacitors-C0G)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
26	CL21C121JDCNNN □	2.00 × 1.25	120pF	200	±5%	0.95
27	CL21C151JCANNN □		150pF	100	±5%	0.75
28	CL21C151JHFNNN □		150pF	630	±5%	1.35
29	CL21C221JCANNN □		220pF	100	±5%	0.75
30	CL21C221JDCNNN □		220pF	200	±5%	0.95
31	CL21C331JCANNN □		330pF	100	±5%	0.75
32	CL21C471JCCNNN □		470pF	100	±5%	0.95
33	CL21C561JCCNNN □		560pF	100	±5%	0.95
34	CL21C561JHFNNN □		560pF	630	±5%	1.35
35	CL21C681JCCNNN □		680pF	100	±5%	0.95
36	CL21C102JCFNNN □		1nF	100	±5%	1.35
37	CL21C102JDFNNN □		1nF	200	±5%	1.35
38	CL21C272JDFNNN □		2.7nF	200	±5%	1.35
39	CL21C272JEFNNN □		2.7nF	250	±5%	1.35
40	CL21C472JCFNNN □		4.7nF	100	±5%	1.35
1	CL31C150JGFNNN □	3.20 × 1.60	15pF	500	±5%	1.40
2	CL31C180JGFNNN □		18pF	500	±5%	1.40
3	CL31C220JGFNNN □		22pF	500	±5%	1.40
4	CL31C220JHNNN □		22pF	2000	±5%	1.80
5	CL31C270JGFNNN □		27pF	500	±5%	1.40
6	CL31C330JGFNNN □		33pF	500	±5%	1.40
7	CL31C390JGFNNN □		39pF	500	±5%	1.40
8	CL31C470JGFNNN □		47pF	500	±5%	1.40
9	CL31C470JHFNNN □		47pF	630	±5%	1.40
10	CL31C470JHNNN □		47pF	2000	±5%	1.80
11	CL31C560JGFNNN □		56pF	500	±5%	1.40
12	CL31C680JCCNNN □		68pF	100	±5%	1.00
13	CL31C680JGFNNN □		68pF	500	±5%	1.40
14	CL31C680JHFNNN □		68pF	630	±5%	1.40
15	CL31C680JIFNNN □		68pF	1000	±5%	1.40
16	CL31C820JGFNCN □		82pF	500	±5%	1.40
17	CL31C101JGFNNN □		100pF	500	±5%	1.40
18	CL31C101JHFNNN □		100pF	630	±5%	1.40
19	CL31C101JIFNNN □		100pF	1000	±5%	1.40
20	CL31C101JHNNN □		100pF	2000	±5%	1.80
21	CL31C121JGFNNN □		120pF	500	±5%	1.40
22	CL31C151JGFNNN □		150pF	500	±5%	1.40
23	CL31C181JGFNNN □		180pF	500	±5%	1.40
24	CL31C221JGFNNN □		220pF	500	±5%	1.40
25	CL31C271JGFNNN □		270pF	500	±5%	1.40
26	CL31C271JCCNNN □		270pF	100	±5%	1.00
27	CL31C331JGFNNN □		330pF	500	±5%	1.40
28	CL31C331JHNNN □		330pF	1000	±5%	1.80
29	CL31C391JCCNNN □		390pF	100	±5%	1.00
30	CL31C471JGFNNN □		470pF	500	±5%	1.40
31	CL31C471JHFNNN □		470pF	630	±5%	1.40
32	CL31C471JIFNNN □		470pF	1000	±5%	1.40
33	CL31C561JCCNNN □		560pF	100	±5%	1.00
34	CL31C561JGFNNN □		560pF	500	±5%	1.40
35	CL31C681JGFNNN □		680pF	500	±5%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Lineup (Medium-High Voltage Capacitors-C0G)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
36	CL31C102JCCNNN □	3.20×1.60	1nF	100	±5%	1.00
37	CL31C102JGHNNN □		1nF	500	±5%	1.80
38	CL31C152JCCNNN □		1.5nF	100	±5%	1.00
39	CL31C222JCCNNN □		2.2nF	100	±5%	1.00
40	CL31C332JGHNNN □		3.3nF	500	±5%	1.80
41	CL31C332JHHNNN □		3.3nF	630	±5%	1.80
42	CL31C392JCHNNN □		3.9nF	100	±5%	1.80
43	CL31C822JDHNNN □		8.2nF	200	±5%	1.80
44	CL31C822JEHNNN □		8.2nF	250	±5%	1.80
45	CL31C183JCHNNN □		18nF	100	±5%	1.80
1	CL32C101JJFNNN □	3.20×2.50	100pF	2000	±5%	1.45
2	CL32C471JJJNNN □		470pF	2000	±5%	2.70
3	CL32C821JIIJNNN □		820pF	1000	±5%	2.70
4	CL32C103JGJNNN □		10nF	500	±5%	2.70
5	CL32C103JHJNNN □		10nF	630	±5%	2.70
6	CL32C273JDJNNN □		27nF	200	±5%	2.70
7	CL32C273JEJNNN □		27nF	250	±5%	2.70
8	CL32C563JCJNNN □		56nF	100	±5%	2.70
1	CL42C100JKFNNN □	4.50×2.00	10pF	3000	±5%	1.45
2	CL42C151KIJNNN □		150pF	3000	±5%	2.20
3	CL42C221JJHNNN □		220pF	2000	±5%	1.80
1	CL43C391JKJNNN □	4.50×3.20	390pF	3000	±5%	2.70
2	CL43C102JIIHNNN □		1nF	1000	±5%	1.80
3	CL43C122JIIJNNN □		1.2nF	1000	±5%	2.20
4	CL43C182JIIJNNN □		1.8nF	1000	±5%	2.70
5	CL43C182JJJNNN □		1.8nF	2000	±5%	2.70
6	CL43C223JGJNNN □		22nF	500	±5%	2.70
7	CL43C223JHJNNN □		22nF	630	±5%	2.70
8	CL43C473JDJNNN □		47nF	200	±5%	2.70
9	CL43C473JEJNNN □		47nF	250	±5%	2.70
10	CL43C563JCJNNN □		56nF	100	±5%	2.70
1	CL55C102JJJNNN □	5.70×5.00	1nF	2000	±5%	2.70
2	CL55C102JKJNNN □		1nF	3000	±5%	2.70
3	CL55C362JIIJNNN □		3.6nF	1000	±5%	2.70
4	CL55C223JGJNNN □		22nF	500	±5%	2.70
5	CL55C223JHJNNN □		22nF	630	±5%	2.70
6	CL55C473JDJNNN □		47nF	200	±5%	2.70
7	CL55C473JEJNNN □		47nF	250	±5%	2.70
8	CL55C683JCJNNN □		68nF	100	±5%	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Product Lineup (Medium-High Voltage Capacitors-X7R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL10B102KC8NNN □	1.60 × 0.80	1 nF	100	±10%	0.90
2	CL10B472KC8NNN □		4.7 nF	100	±10%	0.90
3	CL10B103KC8NNN □		10 nF	100	±10%	0.90
1	CL21B221KDCNNN □	2.00 × 1.25	220 pF	200	±10%	0.95
2	CL21B221KCANNN □		220 pF	100	±10%	0.75
3	CL21B331KDCNNN □		330 pF	200	±10%	0.95
4	CL21B471KCANNN □		470 pF	100	±10%	0.75
5	CL21B102KDCNNN □		1 nF	200	±10%	0.95
6	CL21B102KCANNN □		1 nF	100	±10%	0.75
7	CL21B222KDCNNN □		2.2 nF	200	±10%	0.95
8	CL21B222KCANNN □		2.2 nF	100	±10%	0.75
9	CL21B332KCANNN □		3.3 nF	100	±10%	0.75
10	CL21B472KDCNNN □		4.7 nF	200	±10%	0.95
11	CL21B472KCANNN □		4.7 nF	100	±10%	0.75
12	CL21B682KCANNN □		6.8 nF	100	±10%	0.75
13	CL21B103KDCNNN □		10 nF	200	±10%	0.95
14	CL21B103KCANNN □		10 nF	100	±10%	0.75
15	CL21B153KEFNNN □		15 nF	250	±10%	1.35
16	CL21B153KDFNNN □		15 nF	200	±10%	1.35
17	CL21B153KCCNNN □		15 nF	100	±10%	0.95
18	CL21B223KCFNNN □		22 nF	100	±10%	1.35
19	CL21B473KCFNNN □		47 nF	100	±10%	1.35
20	CL21B683KCFNNN □		68 nF	100	±10%	1.35
21	CL21B104KCFNNN □		100 nF	100	±10%	1.35
22	CL21B154KCFNNN □		150 nF	100	±10%	1.35
23	CL21B224KCFNNN □		220 nF	100	±10%	1.35
1	CL31B221KGFNNN □	3.20 × 1.60	220 pF	500	±10%	1.40
2	CL31B471KGFNNN □		470 pF	500	±10%	1.40
3	CL31B471KDCNNN □		470 pF	200	±10%	1.00
4	CL31B102KJHNNN □		1 nF	2000	±10%	1.80
5	CL31B102KIFNNN □		1 nF	1000	±10%	1.40
6	CL31B102KGFNNN □		1 nF	500	±10%	1.40
7	CL31B102KHFFNNN □		1 nF	630	±10%	1.40
8	CL31B152KGFNNN □		1.5 nF	500	±10%	1.40
9	CL31B152KJHNNN □		1.5 nF	2000	±10%	1.80
10	CL31B222KIFNNN □		2.2 nF	1000	±10%	1.40
11	CL31B222KDCNNN □		2.2 nF	200	±10%	1.00
12	CL31B222KGFNNN □		2.2 nF	500	±10%	1.40
13	CL31B222KJHNNN □		2.2 nF	2000	±10%	1.80
14	CL31B332KGFNNN □		3.3 nF	500	±10%	1.40
15	CL31B332KIFNNN □		3.3 nF	1000	±10%	1.40
16	CL31B472KGFNNN □		4.7 nF	500	±10%	1.40

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Lineup (Medium-High Voltage Capacitors-X7R)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
17	CL31B472KDCNNN □	3.20×1.60	4.7nF	200	±10%	1.00
18	CL31B682KGFNNN □		6.8nF	500	±10%	1.40
19	CL31B103KHFNNN □		10nF	630	±10%	1.40
20	CL31B103KGFNNN □		10nF	500	±10%	1.40
21	CL31B103KFCSNN □		10nF	350	±10%	1.00
22	CL31B153KDCNNN □		15nF	200	±10%	1.00
23	CL31B153KFCSNN □		15nF	350	±10%	1.00
24	CL31B153KCCNNN □		15nF	100	±10%	1.00
25	CL31B153KGFNNN □		15nF	500	±10%	1.40
26	CL31B153KHFNNN □		15nF	630	±10%	1.40
27	CL31B223KDCNNN □		22nF	200	±10%	1.00
28	CL31B223KCCNNN □		22nF	100	±10%	1.00
29	CL31B223KFCSNN □		22nF	350	±10%	1.00
30	CL31B223KGHNNN □		22nF	500	±10%	1.80
31	CL31B223KHHNNN □		22nF	630	±10%	1.80
32	CL31B333KDFNNN □		33nF	200	±10%	1.40
33	CL31B333KFESNN □		33nF	350	±10%	1.25
34	CL31B333KCCNNN □		33nF	100	±10%	1.00
35	CL31B333KGHNNN □		33nF	500	±10%	1.80
36	CL31B333KHHNNN □		33nF	630	±10%	1.80
37	CL31B473KDFNNN □		47nF	200	±10%	1.40
38	CL31B473KFHSNN □		47nF	350	±10%	1.80
39	CL31B473KCCNNN □		47nF	100	±10%	1.00
40	CL31B473KEHNNN □		47nF	250	±10%	1.80
41	CL31B683KEHNNN □		68nF	250	±10%	1.80
42	CL31B104KDHNNN □		100nF	200	±10%	1.80
43	CL31B104KCFNNN □		100nF	100	±10%	1.40
44	CL31B104KEHNNN □		100nF	250	±10%	1.80
45	CL31B154KCHNNN □		150nF	100	±10%	1.80
46	CL31B105KCHNNN □		1μF	100	±10%	1.80
47	CL31B155KCHNNN □		1.5μF	100	±10%	1.80
48	CL31B225KCHNNN □		2.2μF	100	±10%	1.80
1	CL32B102KJFNNN □	3.20×2.50	1nF	2000	±10%	1.45
2	CL32B472KHFNNN □		4.7nF	630	±10%	1.45
3	CL32B472KIFNNN □		4.7nF	1000	±10%	1.45
4	CL32B682KIFNNN □		6.8nF	1000	±10%	1.45
5	CL32B103KCFNNN □		10nF	100	±10%	1.45
6	CL32B153KGFNNN □		15nF	500	±10%	1.45
7	CL32B223KGFNNN □		22nF	500	±10%	1.45
8	CL32B333KHHNNN □		33nF	630	±10%	1.80
9	CL32B333KGHNNN □		33nF	500	±10%	1.80
10	CL32B473KHHNNN □		47nF	630	±10%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.


Product Lineup (Medium-High Voltage Capacitors-X7R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
11	CL32B473KDHNNN □	3.20 × 2.50	47 nF	200	±10%	1.80
12	CL32B473KGHNNN □		47 nF	500	±10%	1.80
13	CL32B683KDINNN □		68 nF	200	±10%	2.20
14	CL32B104KE JNNN □		100 nF	250	±10%	2.70
15	CL32B104KDINNN □		100 nF	200	±10%	2.20
16	CL32B154KCFNNN □		150 nF	100	±10%	1.45
17	CL32B154KDJNNN □		150 nF	200	±10%	2.70
18	CL32B154KEJNNN □		150 nF	250	±10%	2.70
19	CL32B224KCHNNN □		220 nF	100	±10%	1.80
20	CL32B224KDJNNN □		220 nF	200	±10%	2.70
21	CL32B224KEJNNN □		220 nF	250	±10%	2.70
22	CL32B334KCHNNN □		330 nF	100	±10%	1.80
23	CL32B474KCINNN □		470 nF	100	±10%	2.20
24	CL32B105KCJNNN □		1 μF	100	±10%	2.70
25	CL32B155KCHNNN □		1.5 μF	100	±10%	1.80
26	CL32B225KCJNNN □		2.2 μF	100	±10%	2.70
1	CL43B102KJFNNN □	4.50 × 3.20	1 nF	2000	±10%	1.45
2	CL43B152KJFNNN □		1.5 nF	2000	±10%	1.45
3	CL43B222KJFNNN □		2.2 nF	1000	±10%	1.45
4	CL43B222KJFNNN □		2.2 nF	2000	±10%	1.45
5	CL43B332KJFNNN □		3.3 nF	2000	±10%	1.45
6	CL43B103KJFNNN □		10 nF	1000	±10%	1.45
7	CL43B333KIJNNN □		33 nF	1000	±10%	2.70
8	CL43B473KGFNNN □		47 nF	500	±10%	1.45
9	CL43B473KHFNNN □		47 nF	630	±10%	1.45
10	CL43B473KIJNNN □		47 nF	1000	±10%	2.70
11	CL43B104KGINNN □		100 nF	500	±10%	2.20
12	CL43B104KDFNNN □		100 nF	200	±10%	1.45
13	CL43B104KHINNN □		100 nF	630	±10%	2.20
14	CL43B224KCFNNN □		220 nF	100	±10%	1.45
15	CL43B334KCFNNN □		330 nF	100	±10%	1.45
16	CL43B474KEJNNN □		470 nF	250	±10%	2.70
17	CL43B474KCHNNN □		470 nF	100	±10%	1.80
18	CL43B474KDJNNN □		470 nF	200	±10%	2.70
19	CL43B105KCJNNN □		1 μF	100	±10%	2.70
1	CL55B103KJHNNN □	5.70 × 5.00	10 nF	2000	±10%	1.80
2	CL55B473KIINNN □		47 nF	1000	±10%	2.20
3	CL55B224KGJNNN □		220 nF	500	±10%	2.70
4	CL55B224KHJNNN □		220 nF	630	±10%	2.70
5	CL55B105KCHNNN □		1 μF	100	±10%	1.80
6	CL55B105KDJNNN □		1 μF	200	±10%	2.70
7	CL55B105KEJNNN □		1 μF	250	±10%	2.70
8	CL55B475KCJNNN □		4.7 μF	100	±10%	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Array Type Capacitors

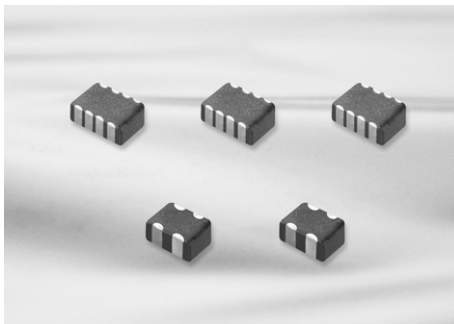


Feature

- Reduction in required space(more than 50%)
- Reduction in cost and time for replacement of PCB
- Reduction in amount of solder joints
- Easier PCB design
- Reduced waste from tape and reel packaging process
- It protect EMI bypassing digital signal line nose

Application

- A bypass for digital and analog signal line noise generated by telecommunication equipment and other common electronic circuits
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.


Structure and Dimensions

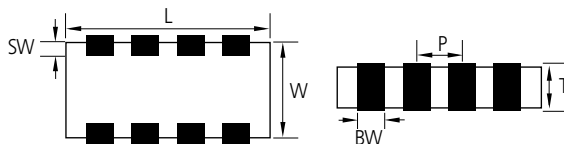


Code	Size (mm)	EIA Code	Dimension(mm)					
			L	W	T	BW	SW	P
A	0906	0302	0.90 ± 0.05	0.60 ± 0.05	0.45 ± 0.05	0.25 ± 0.05	0.15 ± 0.1	0.45 ± 0.05
A	1410	0504	1.37 ± 0.15	1.0 ± 0.15	0.35 ± 0.05 0.50 ± 0.05 0.60 ± 0.06 0.80 ± 0.08	0.36 ± 0.1	0.2 ± 0.1	0.64 ± 0.1
A	2012	0805	2.0 ± 0.15	1.25 ± 0.15	0.85 ± 0.1	0.5 ± 0.2	0.25 ± 0.15	1.0 ± 0.1
B	2012	0805	2.0 ± 0.15	1.25 ± 0.15	0.85 ± 0.1	0.25 ± 0.1	0.25 ± 0.15	0.5 ± 0.1
B	3216	1206	3.2 ± 0.15	1.6 ± 0.15	0.85 ± 0.15	0.4 ± 0.2	0.3 ± 0.15	0.8 ± 0.2

Structure and Control Code

■ A : ARRAY(2-element)

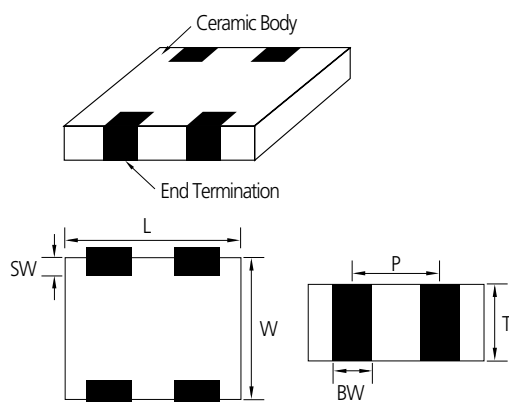

■ B : ARRAY(4-element)

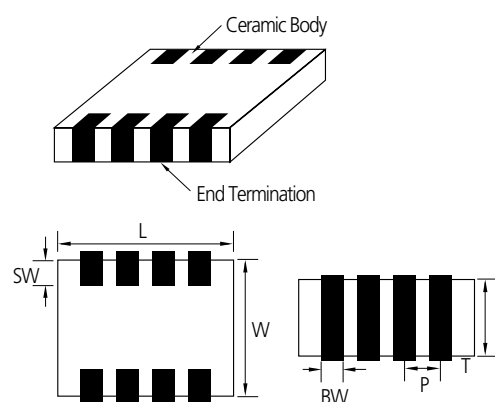

Array Type Capacitors Table (C0G, X5R, X7R, Y5V)

TC	Size(mm)	Type	Vr(V)	Tmax (mm)	Capacitance (pF)					
					10	22	27	47	100	470
C0G	0504(1410)	2-element	25	0.88						
	1206(3216)	4-element	50	1.00						


TC	Size(mm)	Type	Vr(V)	Tmax (mm)	Capacitance (nF)											
					1	2.2	4.7	10	22	47	100	220	470	1000	2200	
X5R	0302(0906)	2-element	4	0.50												
			6.3													
			10													
	0504(1410)	2-element	6.3	0.88												
				0.66												
				0.55												
				0.40												
			10	0.88												
				0.66												
				0.55												
				0.40												
			16	0.88												
				0.66												
				0.55												
				0.40												
			25	0.88												
				0.66												
				0.55												
	0805(2012)	2-element	6.3	0.95												
			10													
			16													
X7R	0805(2012)	4-element	10	0.95												
			16													
	1206(3216)	4-element	16	1.00												
			25													
			50													
Y5V	1206(3216)	4-element	25	1.00												
			50													

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Lineup (Array Type Capacitors)

	Part Number	Element Type	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL14C270KA6NAN □	2-Array	1.40 × 1.00	27 pF	25	±10%	0.66
1	CL31C100JBCNBN □	4-Array	3.20 × 1.60	10 pF	50	±5%	1.00
2	CL31C150JBCNBN □			15 pF	50	±5%	1.00
3	CL31C220JBCNBN □			22 pF	50	±5%	1.00
4	CL31C270JBCNBN □			27 pF	50	±5%	1.00
5	CL31C330KBCNBN □			33 pF	50	±10%	1.00
6	CL31C390KBCNBN □			39 pF	50	±10%	1.00
7	CL31C680JBCNBN □			68 pF	50	±5%	1.00
8	CL31C820JBCNBN □			82 pF	50	±5%	1.00
9	CL31C101JBCNBN □			100 pF	50	±5%	1.00
10	CL31C151KBCNBN □			150 pF	50	±10%	1.00
11	CL31C181JBCNBN □			180 pF	50	±5%	1.00
12	CL31C331JBCNBN □			330 pF	50	±5%	1.00
13	CL31C471JBCNBN □			470 pF	50	±5%	1.00
1	CL21B471KBCNBN □	4-Array	2.00 × 1.25	470 pF	50	±10%	0.95
2	CL21B104KOCNBN □			100 nF	16	±10%	0.95
3	CL21B104MPCNBN □			100 nF	10	±20%	0.95
1	CL31B102MBCNBN □	4-Array	3.20 × 1.60	1 nF	50	±20%	1.00
2	CL31B103MBCNBN □			10 nF	50	±20%	1.00
3	CL31B153KBCNBN □			15 nF	50	±10%	1.00
4	CL31B473KACNBN □			47 nF	25	±10%	1.00
5	CL31B104KACNBN □			100 nF	25	±10%	1.00
6	CL31B104KOCNBN □			100 nF	16	±10%	1.00
1	CL09A104KP4SAN □	2-Array	0.90 × 0.60	100 nF	10	±10%	0.50
2	CL09A104KQ4SAN □			100 nF	6.3	±10%	0.50
3	CL09A105MQ4NAN □			1 μF	6.3	±20%	0.50
4	CL09A105MR4NAN □			1 μF	4	±20%	0.50
1	CL14A104KA6NAN □	2-Array	1.40 × 1.00	100 nF	25	±10%	0.66
2	CL14A104KO6NAN □			100 nF	16	±10%	0.66
3	CL14A104KP6NAN □			100 nF	10	±10%	0.66
4	CL14A105MA5NAN □			1 μF	25	±20%	0.55
5	CL14A105KP8NAN □			1 μF	10	±10%	0.88
6	CL14A105MO3NAN □			1 μF	16	±20%	0.40
7	CL14A105MO8NAN □			1 μF	16	±20%	0.88
8	CL14A105MO5NAN □			1 μF	16	±20%	0.55
9	CL14A105MP3NAN □			1 μF	10	±20%	0.40
10	CL14A105MP5NAN □			1 μF	10	±20%	0.55
11	CL14A225KP8NAN □			2.2 μF	10	±10%	0.88
12	CL14A225KQ8NAN □			2.2 μF	6.3	±10%	0.88
1	CL21A105KOCNAN □	2-Array	2.00 × 1.25	1 μF	16	±10%	0.95
2	CL21A105MPCNAN □			1 μF	10	±20%	0.95
1	CL31F473ZBCNBN □	4-Array	3.20 × 1.60	47 nF	50	+80/-20%	1.00
2	CL31F104ZACNBN □			100 nF	25	+80/-20%	1.00

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

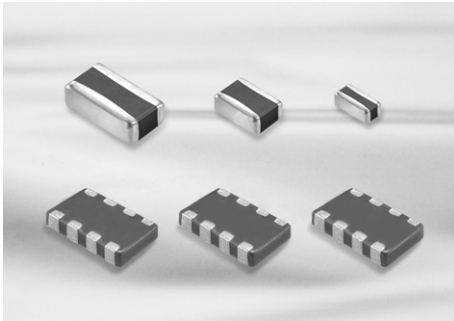


Feature

- Low ESL, good for noise reduction for high frequency
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application


- High Speed Microprocessor
- High Frequency Digital Equipment
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

LICC(Low Inductance Ceramic Capacitors)



Code	Size (mm)	EIA Code	Dimension(mm)			
			L	W	T	BW
L5	0510	0204	0.52 ± 0.05	1.0 ± 0.05	0.3 ± 0.05	0.18 ± 0.08
01	0816	0306	0.8 ± 0.15	1.6 ± 0.2	$0.5 + 0.05 / - 0.1$	$0.25 + 0.15$

SLIC(Super Low Inductance Capacitors)

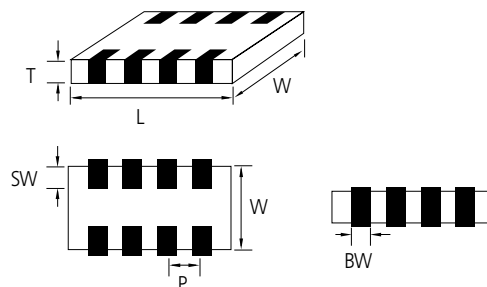

Code	Size (mm)	EIA Code	Dimension(mm)					
			L	W	T	BW	SW	P
10	1608	0603	1.6 ± 0.1	0.8 ± 0.1	$0.5 / +0.05 - 0.1$	0.25 ± 0.1	0.15 ± 0.1	0.4 ± 0.1
21	2012	0805	2.0 ± 0.1	1.25 ± 0.1	$0.5 / +0.05 - 0.1$	$0.25 + 0.15 - 0.1$	$0.2 + 0.15 - 0.1$	0.5 ± 0.1

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Low ESL Capacitors Table (LICC)

TC	Size(mm)	Tmax(mm)	Vr(V)	Capacitance (uF)									
				0.01	0.022	0.047	0.1	0.22	0.47	1	2.2	4.7	10
X6S /X7S /X7T	0204(0510)	0.35	2.5							X7T			
			4				X7S		X6S				
			6.3				X7S						
	0306(0816)	0.55	4							X7S			

TC	Size(mm)	Tmax(mm)	Vr(V)	Capacitance (uF)									
				0.01	0.022	0.047	0.1	0.22	0.47	1	2.2	4.7	10
X7R /X5R	0306(0816)	0.55	6.3			X7R				X5R			
			10			X7R							
			16			X7R							
			25			X7R							
			50			X7R							

Low ESL Capacitors Table (SLIC)

TC	Size(mm)	Tmax(mm)	Vr(V)	Capacitance (uF)							
				0.1	0.47	0.68	1	2.2	4.7	10	22
X7R /X7S /X7T	0603(1608)	0.55	2.5								
			4			X7S					
	0805(2012)	0.55	4			X7R		X7S			
			6.3			X7R					
			16			X7R					

Product Lineup (Low ESL Capacitors-X7R, X6S, X7S, X7T)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL21B104MO5NJN □	2.00 × 1.25	100nF	16	±20%	0.55
2	CL21B684MO5NJN □		680nF	16	±20%	0.55
3	CL21B684MQ5NJN □		680nF	6.3	±20%	0.55
1	CLL5X224MR3NLN □	0.50 × 1.00	220nF	4	±20%	0.35
2	CLL5X474MR3NLN □		470nF	4	±20%	0.35
3	CLL5X105MR3NLN □		1μF	4	±20%	0.35
1	CLL5Y104MQ3NLN □	0.50 × 1.00	100nF	6.3	±20%	0.35
1	CL01Y105MR5NLN □	0.80 × 1.60	1μF	4	±20%	0.55
2	CL01Y225MR5NLN □		2.2μF	4	±20%	0.55
1	CL10Y474MR5NJN □	1.60 × 0.80	470nF	4	±20%	0.55
2	CL10Y105MR5NJN □		1μF	4	±20%	0.55
3	CL10Y225MR5NJN □		2.2μF	4	±20%	0.55
1	CL21Y105MR5NJN □	2.00 × 1.25	1μF	4	±20%	0.55
2	CL21Y225MR5NJN □		2.2μF	4	±20%	0.55
1	CLL5Z105MS3NLN □	0.50 × 1.00	1μF	2.5	±20%	0.35

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition




Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Reliability Test Condition

No	Item		Performance	Test Condition																														
1	Appearance		No abnormal exterior appearance	Visual Inspection through Microscope(× 10)																														
2	Insulation Resistance		10,000MΩ min. or 500MΩ · μF min.(or *100MΩ · μF) product whichever is smaller (Rated voltage ≤ 16V: 10,000MΩ min. or 100MΩ · μF min. product whichever is smaller)	Apply the rated voltage for 60~120 sec. Rated voltage > 500V: Insulation Resistance shall be measured with 500 ± 50Vdc																														
3	Withstanding Voltage		No dielectric breakdown or mechanical breakdown	Apply the specified voltage* for 1~5 sec. Charge/Discharge current limit: 50mA max. *CLASS I (Rated Voltage < 100V): 300% of the rated Voltage CLASS II (Rated Voltage < 100V): 250% of the rated Voltage In the case of Vr ≥ 100V products, following condition should be applied. 100V ≤ Rated Voltage < 500V: 200% of the rated Voltage 500V ≤ Rated Voltage < 1000V: 150% of the rated Voltage Rated Voltage ≥ 1000V: 120% of the rated Voltage																														
4	Capaci tance	CLASS I	Within the specified tolerance	Capacitance	Frequency	Voltage																												
				≤ 1,000pF	1MHz ± 10%	0.5 ~ 5 Vrms																												
				> 1,000pF	1KHz ± 10%																													
		CLASS II	Within the specified tolerance	Capacitance	Frequency	Voltage																												
				≤ 10μF	1KHz ± 10%	1.0 ± 0.2 Vrms																												
				> 10μF	120Hz ± 20%	0.5 ± 0.1Vrms																												
5	Q	CLASS I	Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 + 20 × C (C : Capacitance)	*	1KHz ± 10%	0.5 ± 0.1Vrms																												
				Capacitance	Frequency	Voltage																												
				≤ 1,000pF	1MHz ± 10%	0.5 ~ 5 Vrms																												
				> 1,000pF	1KHz ± 10%																													
				Capacitance	Frequency	Voltage																												
				≤ 10μF	1KHz ± 10%	1.0 ± 0.2 Vrms																												
	> 10μF	120Hz ± 20%	0.5 ± 0.1Vrms																															
	Tanδ	CLASS II	1. Characteristic: A(X5R) <table><tr><td>Rated Voltage</td><td>Spec</td></tr><tr><td>50V / 35V</td><td>0.025 max / 0.05 max*</td></tr><tr><td>25V</td><td>0.025 max / 0.05 max* / 0.10 max*</td></tr><tr><td>16V</td><td>0.035 max / 0.05 max* / 0.10 max*</td></tr><tr><td>≤ 10V</td><td>0.05 max / 0.10 max*</td></tr></table> 2. Characteristic: B(X7R), X(X6S), Y(X7S) <table><tr><td>Rated Voltage</td><td>Spec</td></tr><tr><td>50V ≥ / 35V / 25V</td><td>0.025 max / 0.05 max* / 0.10 max*</td></tr><tr><td>16V</td><td>0.035 max / 0.10 max*</td></tr><tr><td>≤ 10V</td><td>0.05 max / 0.10 max*</td></tr></table> 3. Characteristic: F(Y5V) <table><tr><td>Rated Voltage</td><td>Spec</td></tr><tr><td>50V / 35V / 25V</td><td>0.05 max / 0.07 max* / 0.09 max*</td></tr><tr><td>16V</td><td>0.07 max / 0.09 max* / 0.125 max*</td></tr><tr><td>10V</td><td>0.125 max / 0.16 max*</td></tr><tr><td>≤ 6.3V</td><td>0.16 max</td></tr></table>	Rated Voltage	Spec	50V / 35V	0.025 max / 0.05 max*	25V	0.025 max / 0.05 max* / 0.10 max*	16V	0.035 max / 0.05 max* / 0.10 max*	≤ 10V	0.05 max / 0.10 max*	Rated Voltage	Spec	50V ≥ / 35V / 25V	0.025 max / 0.05 max* / 0.10 max*	16V	0.035 max / 0.10 max*	≤ 10V	0.05 max / 0.10 max*	Rated Voltage	Spec	50V / 35V / 25V	0.05 max / 0.07 max* / 0.09 max*	16V	0.07 max / 0.09 max* / 0.125 max*	10V	0.125 max / 0.16 max*	≤ 6.3V	0.16 max	Capacitance	Frequency	Voltage
				Rated Voltage	Spec																													
				50V / 35V	0.025 max / 0.05 max*																													
				25V	0.025 max / 0.05 max* / 0.10 max*																													
				16V	0.035 max / 0.05 max* / 0.10 max*																													
				≤ 10V	0.05 max / 0.10 max*																													
				Rated Voltage	Spec																													
				50V ≥ / 35V / 25V	0.025 max / 0.05 max* / 0.10 max*																													
				16V	0.035 max / 0.10 max*																													
				≤ 10V	0.05 max / 0.10 max*																													
				Rated Voltage	Spec																													
50V / 35V / 25V				0.05 max / 0.07 max* / 0.09 max*																														
16V	0.07 max / 0.09 max* / 0.125 max*																																	
10V	0.125 max / 0.16 max*																																	
≤ 6.3V	0.16 max																																	
≤ 10μF	1KHz ± 10%	1.0 ± 0.2 Vrms																																
> 10μF	120Hz ± 20%	0.5 ± 0.1Vrms																																
*	1KHz ± 10%	0.5 ± 0.1Vrms																																
You can check the specification at the web site or contact sales people for each product with mark*																																		

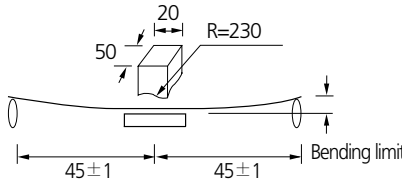No	Item		Performance	Test Condition																
6	Temperature Characteristics of Capacitance	CLASS I	<table><tr><th>Characteristic</th><th>Temp.Coefficient(PPM/°C)</th></tr><tr><td>C</td><td>0 ± 30</td></tr></table>	Characteristic	Temp.Coefficient(PPM/°C)	C	0 ± 30	Capacitance shall be measured by the steps shown in the following table. <table><tr><th>Step</th><th>Temperature(°C)</th></tr><tr><td>1</td><td>25 ± 2</td></tr><tr><td>2</td><td>Min. Operating Temp. ±2</td></tr><tr><td>3</td><td>25 ± 2</td></tr><tr><td>4</td><td>Max. Operating Temp. ±2</td></tr><tr><td>5</td><td>25 ± 2</td></tr></table>	Step	Temperature(°C)	1	25 ± 2	2	Min. Operating Temp. ±2	3	25 ± 2	4	Max. Operating Temp. ±2	5	25 ± 2
		Characteristic	Temp.Coefficient(PPM/°C)																	
C	0 ± 30																			
Step	Temperature(°C)																			
1	25 ± 2																			
2	Min. Operating Temp. ±2																			
3	25 ± 2																			
4	Max. Operating Temp. ±2																			
5	25 ± 2																			
	CLASS II	<table><tr><th>Characteristic</th><th>Capacitance Change(%) with No bias</th></tr><tr><td>A(X5R)/ B(X7R)</td><td>± 15%</td></tr><tr><td>X(X6S), Y(X7S)</td><td>± 22%</td></tr><tr><td>Z(X7T)</td><td>+22%~33%</td></tr><tr><td>F(Y5V)</td><td>+22%~82%</td></tr></table>	Characteristic	Capacitance Change(%) with No bias	A(X5R)/ B(X7R)	± 15%	X(X6S), Y(X7S)	± 22%	Z(X7T)	+22%~33%	F(Y5V)	+22%~82%	(1) CLASS I Temperature Coefficient shall be calculated from the formula as below Temp. Coefficient= $\frac{C2 - C1}{C1 \times \Delta T} \times 10^6$ [ppm/°C] C1: Capacitance at step 3 C2: Capacitance at 125°C ΔT: 100°C(=125°C-25°C) (2) CLASS II Capacitance Change shall be calculated from the formula as below $\Delta C = \frac{C2 - C1}{C1} \times 100(\%)$ C1: Capacitance at step 3 C2: Capacitance at step 2 or 4							
Characteristic	Capacitance Change(%) with No bias																			
A(X5R)/ B(X7R)	± 15%																			
X(X6S), Y(X7S)	± 22%																			
Z(X7T)	+22%~33%																			
F(Y5V)	+22%~82%																			
7	Adhesive Strength of Termination		No indication of peeling shall occur on the terminal electrode	Apply 500g.f* pressure for 10 ± 1 sec. *200g.f for 0201 *100g.f for 01005 																
8	Appearance	No indication of peeling shall occur		• Bending Limit: 1mm • Test Speed: 1.0mm/sec. • Keep the test board at the limit point in 5 sec. • Then Measure Capacitance 																
	Capacitance	<table><tr><th>Characteristic</th><th>Capacitance Change</th></tr><tr><td>CLASS I</td><td>± 5% or ± 0.5 pF whichever is larger</td></tr><tr><td>CLASS II</td><td></td></tr><tr><td>A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)</td><td>± 12.5%</td></tr><tr><td>F(Y5V)</td><td>± 30%</td></tr></table>	Characteristic		Capacitance Change	CLASS I	± 5% or ± 0.5 pF whichever is larger	CLASS II		A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	± 12.5%	F(Y5V)	± 30%							
Characteristic	Capacitance Change																			
CLASS I	± 5% or ± 0.5 pF whichever is larger																			
CLASS II																				
A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	± 12.5%																			
F(Y5V)	± 30%																			
9	Solderability		More than 75% of the terminal surface is to be soldered newly, so metal part does not come out or dissolve 	<table><tr><td>Solder</td><td>Sn-3Ag-0.5Cu</td></tr><tr><td>Solder Temp.</td><td>245 ± 5°C</td></tr><tr><td>Flux</td><td>RMA Type</td></tr><tr><td>Dip time</td><td>3 ± 0.3 sec.</td></tr><tr><td>Pre-heating</td><td>at 80~120°C for 10~30 sec.</td></tr></table>	Solder	Sn-3Ag-0.5Cu	Solder Temp.	245 ± 5°C	Flux	RMA Type	Dip time	3 ± 0.3 sec.	Pre-heating	at 80~120°C for 10~30 sec.						
Solder	Sn-3Ag-0.5Cu																			
Solder Temp.	245 ± 5°C																			
Flux	RMA Type																			
Dip time	3 ± 0.3 sec.																			
Pre-heating	at 80~120°C for 10~30 sec.																			
10	Appearance	No mechanical damage shall occur		Solder temperature: 270 ± 5°C DIP TIME:10 ± 1 sec. Each termination shall be fully immersed and preheated as below: <table><tr><th>Step</th><th>Temperature(°C)</th><th>Time (sec.)</th></tr><tr><td>1</td><td>80~100</td><td>60</td></tr><tr><td>2</td><td>150~180</td><td>60</td></tr></table>	Step	Temperature(°C)	Time (sec.)	1	80~100	60	2	150~180	60							
	Step	Temperature(°C)	Time (sec.)																	
	1	80~100	60																	
	2	150~180	60																	
	Capacitance	<table><tr><th>Characteristic</th><th>Capacitance Change</th></tr><tr><td>CLASS I</td><td>± 2.5% or ± 0.25 pF whichever is larger</td></tr><tr><td>CLASS II</td><td></td></tr><tr><td>A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)</td><td>± 7.5%</td></tr><tr><td>F(Y5V)</td><td>± 20%</td></tr></table>	Characteristic	Capacitance Change	CLASS I	± 2.5% or ± 0.25 pF whichever is larger	CLASS II		A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	± 7.5%	F(Y5V)	± 20%			Leave the capacitor in ambient condition for specified time* before measurement *24 ± 2 hours(CLASS I) 24 ± 2 hours(CLASS II)					
		Characteristic	Capacitance Change																	
		CLASS I	± 2.5% or ± 0.25 pF whichever is larger																	
		CLASS II																		
A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	± 7.5%																			
F(Y5V)	± 20%																			
Q (CLASS I)	Within the specified initial value																			
Tanδ (CLASS II)	Within the specified initial value																			
Insulation resistance	Within the specified initial value																			
Withstanding voltage	Within the specified initial value																			

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

No	Item	Performance		Test Condition		
11	Vibration Test	Appearance	No mechanical damage shall occur		The capacitor shall be subjected to a harmonic motion having a total amplitude of 1.5mm changing frequency from 10Hz to 55Hz and back to 10Hz in about 1 min. Repeat this for 2hours each in 3 mutually perpendicular directions.	
		Capacitance	Characteristic	Capacitance Change		
			CLASS I			$\pm 2.5\%$ or $\pm 0.25 \text{ pF}$ whichever is larger
			CLASS II	A(X5R), B(X7R)		$\pm 5\%$
				X(X6S), Y(X7S) Z(X7T)		$\pm 10\%$
		F(Y5V)		$\pm 20\%$		
		Q (CLASS I)	Within the specified initial value			
Tan δ (CLASSII)	Within the specified initial value					
Insulation resistance	Within the specified initial value					
12	Moisture Resistance	Appearance	No mechanical damage shall occur		Applied Voltage: rated voltage Temperature: $40 \pm 2^\circ\text{C}$ Humidity: 90~95% RH Duration Time: 500+12/0 Hr. Charge/Discharge Current: 50mA max. Perform the initial measurement according to Note1. Perform the final measurement according to Note2. This test is only applied to $V_r \leq 500\text{V}$ products. You can check the specification at the web site or contact sales people for each product with mark*	
		Capacitance	Characteristic	Capacitance Change		
			CLASS I			$\pm 7.5\%$ or $\pm 0.75\text{pF}$ whichever is larger
			CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)		$\pm 12.5\%$
				F(Y5V)		$\pm 30\%$
		Q (CLASS I)	Capacitance $\geq 30\text{pF}$: $Q \geq 200$ $< 30\text{pF}$: $Q \geq 100+10/3 \times C$ (C: Capacitance)			
		Tan δ (CLASSII)	1.Capacitance: A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max*(16V / 25V) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 2.Capacitance: B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V $\geq$) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 3.Capacitance: F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V)			
Insulation resistance	500M Ω min. or 25M $\Omega \cdot \mu\text{F}$ min. product whichever is smaller / 12.5M $\Omega \cdot \mu\text{F}$ or over*					
13	High Temperature Resistance	Appearance	No mechanical damage shall occur		Temperature : max. operating temperature Duration Time: 1000+48/0 Hr. Charge/Discharge Current: 50mA max. $V_r \leq 200\text{V}$: 200% of the rated Voltage $250\text{V} \leq V_r \leq 500\text{V}$: 150% of the rated Voltage $V_r = 630\text{V}$: 120% of the rated Voltage $1000\text{V} \leq V_r \leq 3000\text{V}$: 100% of the rated Voltage * : 150% or 100% of the rated Voltage Perform the initial measurement according to Note1 for class II Perform the final measurement according to Note2. You can check the specification at the web site or contact sales people for each product with mark*	
		Capacitance	Characteristic	Capacitance Change		
			CLASS I			$\pm 3\%$ or $\pm 0.3 \text{ pF}$ whichever is larger
			CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)		$\pm 12.5\%$
				F(Y5V)		$\pm 30\%$
		Q (CLASS I)	Capacitance $\geq 30\text{pF}$: $Q \geq 350$ $10 \leq \text{Capacitance} < 30\text{pF}$: $Q \geq 275+2.5 \times C$ Capacitance $< 10\text{pF}$: $Q \geq 200+10 \times C$ (C: Capacitance)			
		Tan δ (CLASSII)	1.Capacitance: A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max*(16V / 25V) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 2.Capacitance: B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V $\geq$) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 3.Capacitance: F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V)			
Insulation resistance	1,000M Ω min. or 50M $\Omega \cdot \mu\text{F}$ min. product whichever is smaller / 25M $\Omega \cdot \mu\text{F}$ or over*					

No	Item	Performance			Test Condition			
14	Temperature Cycle	Appearance	No mechanical damage shall occur			Capacitor shall be subjected to 5 cycles. Condition for 1 cycle:		
		Capacitance	Characteristic		Capacitance Change			
			CLASS I		± 2.5% or ± 0.25pF whichever is larger	Step	Temperature(°C)	Time(min.)
			CLASS II	A(X5R), B(X7R)	± 7.5%	1	min. operating temperature +0/-3	30
				X(X6S), Y(X7S) Z(X7T)	± 15%	2	25	2~3
				F(Y5V)	± 20%	3	max. operating temperature +0/-3	30
		Q (CLASS I)	Within the specified initial value			4	25	2~3
		Tanδ (CLASS II)	Within the specified initial value			Leave the capacitor in ambient condition for specified time* before measurement *24 ± 2 hours(CLASS I) 24 ± 2 hours(CLASS II)		
Insulation resistance	Within the specified initial value							

No	Recommended Soldering Method					
15	Recommended Soldering Method By Size & Capacitance	Size inch(mm)	Temperature Characteristic	Capacitance	Condition	
					Flow	Reflow
		01005(0402)	-	-	-	○
		0201 (0603)				
		0402 (1005)				
		0603(1608)	Class I	-	○	○
			Class II	C < 1μF	○	○
				C ≥ 1μF	-	○
		0805 (2012)	Class I	-	○	○
			Class II	C < 4.7μF	○	○
				C ≥ 4.7μF	-	○
			Array	-	-	○
		1206 (3216)	Class I	-	○	○
			Class II	C < 10μF	○	○
				C ≥ 10μF	-	○
			Array	-	-	○
		1210 (3225)	-	-	-	○
1808 (4520)	○					
1812 (4532)	○					
2220 (5750)	○					

Note1. Initial Measurement For Class II

Perform the heat treatment at 150°C+0/-10°C for 1 hour. Then Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement.
Then perform the measurement.

Note2. Latter Measurement**1. CLASS I**

Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.

2. CLASS II

Perform the heat treatment at 150°C+0/-10°C for 1 hour. Then Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement.
Then perform the measurement.

Note3. All Size in Reliability Test Condition Section is "inch"


Note4. Camera Strobe Circuit Capacitors Should be Following a Special Reliability Test Condition.
Please check with our sales representatives or product engineers.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

S A M S U N G E L E C T R O - M E C H A N I C S



Premium Capacitors for Automotive Applications

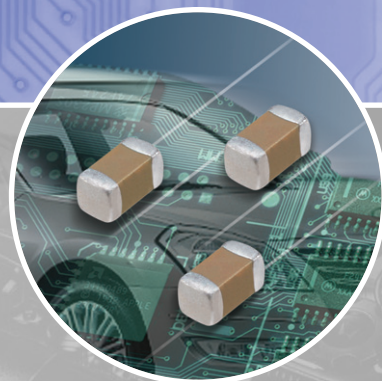

SAMSUNG
ELECTRO-MECHANICS

SAMSUNG

Premium Capacitors for Automotive Applications

Part Numbering System (Automotive Capacitors)

	CL	10	B	104	K	B	8	5	P	N	C
	1	2	3	4	5	6	7	8	9	10	11
1. SERIES CODE _____ CL=Multi layer Ceramic Capacitors											
2. SIZE CODE — inch (mm) _____ 05=1005(0402) 10=1608(0603) 21=2012(0805) 31=3216(1206) 32=3225(1210)											
★ 3. DIELECTRIC CODE _____ C=C0G (Class I) B=X7R (Class II)											
4. CAPACITANCE CODE _____ Capacitance expressed in pF. 2 significant digits plus number of zeros. example) 106=10 × 10 ⁶ =10000000pF For Values < 10pF, Letter R denotes decimal point example) 1R5=1.5pF											
★★ 5. TOLERANCE CODE _____ C=±0.25pF D=±0.5pF F=±1pF, ±1%* G=±2% J=±5% K=±10% M=±20% *For Values ≤10pF, F=±1pF, Values>10pF, F=±1% ※This code has only typical specifications. Please refer to individual specifications.											
6. RATED VOLTAGE CODE _____ P=10V O=16V A=25V B=50V C=100V											
★★★ 7. THICKNESS CODE _____ 5 = 0.50mm 6= 0.60mm 8 = 0.80mm C = 0.85mm P = 1.15mm F = 1.25mm H = 1.60mm J = 2.50mm ※This code has only typical specifications. Please refer to individual specifications.											
8. DESIGN CODE _____ 1=Ni/Cu/Ni Barrier/Sn 100%/Standard 4=Ni/Cu+Soft termination/Ni Barrier/Sn 100%/Standard 5=Ni/Cu+Soft termination/Ni Barrier/Sn 100%/Open Mode ※This code has only typical specifications. Please refer to individual specifications.											
9. PRODUCT CODE _____ P=Automotive product meet AEC-Q-200. ※If orders are placed without returned specification, please allow us to judge that specification is accepted by your side.											
10. GRADE CODE _____ N=Standard											
11. PACKAGING CODE _____ B = Bulk O = Cardboard Tape, 10" Reel E = Embossed Type, 7" Reel P = Bulk Case D = Cardboard Tape, 13" Reel(10,000ea) F = Embossed Type, 13" Reel C = Cardboard Tape, 7" Reel L = Cardboard Tape, 13" Reel(15,000ea) S = Embossed Type, 10" Reel											

This catalog has only typical specifications because there is no space for detailed specifications.
Please approve our product specifications or transact the approval sheet for product specifications before ordering.

★
Class I

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient Range(ppm/°C)
C	COG	-55 ~ +125	0 ±30

Class II

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change (ΔC %)
B	X7R	-55 ~ +125	0 ±15

★★
Capacitance Tolerance

Code	Capacitance Tolerance	TC	Capacitance Step	Rated Capacitance
C	± 0.25 pF	COG	Under 5 pF	E-12 series ★
D	± 0.5 pF	COG	6.0 to 9.0 pF	E-12 series ★
J	± 5 %	COG	Over 10 pF	E-12 series
K	± 10 %	X7R	Under 0.01 μF	E-3 series
			Over 0.01 μF	E-6 series
M	± 20 %	X7R	Under 0.01 μF	E-3 series
			Over 0.01 μF	E-6 series

★E-24 series is also available


Series	Capacitance Step											
E-3	1.0				2.2				4.7			
E-6	1.0		1.5		2.2		3.3		4.7		6.8	
E-12	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2
E-24	1.0	1.1	1.2	1.3	2.2	2.4	2.7	3.0	4.7	5.1	5.6	6.2
	1.5	1.6	1.8	2.0	3.3	3.6	3.9	4.3	6.8	7.5	8.2	9.1

★★★

Size	Code	Thickness(mm)	Spec(mm) ★
0402(1005)	5	0.50	±0.05
0603(1608)	8	0.80	±0.10
0805(2012)	6	0.60	±0.10
	C	0.85	±0.10
	F	1.25	±0.10
1206(3216)	C	0.85	±0.15
	P	1.15	±0.10
	H	1.60	±0.20

★The tolerance will be changed by Customer' standards and our new products. (High Capacitance)
Please check with our sales representatives or product engineers before ordering.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

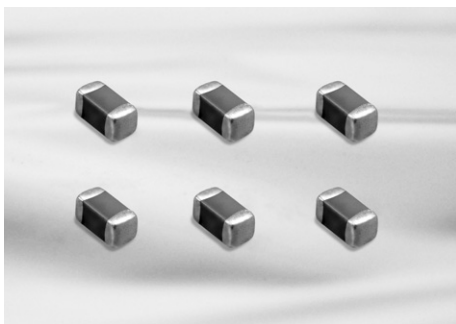


Feature

- Automotive products are manufactured in state of the art facilities recommended for registration to ISO/TS 16949:2002.
- Automotive products meet AEC-Q-200 requirements.
- Automotive products are RoHS compliant.
- Samsung terminations are suitable for all flow and reflow soldering systems. (10/21/31 size type only)
- Automotive products meet JEDEC-020-D requirements.
- COG dielectric components contain BME and copper terminations with a Ni/Sn plated overcoat.
- X7R dielectric components have BME and soft terminations with a Ni/Sn plated overcoat.

Application

- Automotive Electronic Equipment
(Powertrain, Safety, Body & Chassis, Convenience, Infotainment)

Structure and Dimensions



Code	EIA Code	Dimension(mm)			
		L	W	T	BW
05	0402	1.00 ± 0.05	0.50 ± 0.05	$0.50 (\pm 0.05)$	0.25 ± 0.10
10	0603	1.60 ± 0.10	0.80 ± 0.10	$0.80 (\pm 0.10)$	0.3 ± 0.2
21	0805	2.00 ± 0.10	1.25 ± 0.10	$0.60 (\pm 0.10)$	$0.5+0.2/-0.3$
				$0.85 (\pm 0.10)$	
				$1.25 (\pm 0.10)$	
31	1206	3.20 ± 0.20	1.60 ± 0.20	$0.85 (\pm 0.15)$	0.5 ± 0.3
				$1.15 (\pm 0.10)$	
				$1.60 (\pm 0.20)$	

Automotive Capacitors Table (C0G, X7R)

TC	Size(mm)	Thickness (mm)	Vr	Capacitance (pF)			Capacitance (nF)						
				100	220	470	1	2.2	4.7	10	22	47	100
COG	0402(1005)	0.50	50										
			100										
	0603(1608)	0.80	50										
			100										
	0805(2012)	0.60	50										
		0.85											
		1.25	100										

TC	Size(mm)	Thickness (mm)	Vr	Capacitance (nF)						Capacitance (μF)			
				10	22	47	100	220	470	1	2.2	4.7	10
X7R	0402(1005)	0.50	10										
			16										
			25										
			50										
	0603(1608)	0.80	10										
			16										
			25										
			50										
			100										
	0805(2012)	1.25	10										
		0.85											
		1.25	16										
		0.60											
		0.85	25										
		1.25											
		0.60											
		0.85	50										
		1.25											
		0.60											
		0.85	100										
		1.25											
	1206(3216)	1.60	10										
		1.15											
		1.60	16										
		0.85											
		1.15	25										
		1.60											
		0.85											
		1.15	50										
		1.60											

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Product Lineup (Automotive Capacitors_COG)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05C010CB51PN □	1.00×0.50	1.0pF	50	±0.25pF	0.55
2	CL05C010CC51PN □		1.0pF	100	±0.25pF	0.55
3	CL05C1R5CB51PN □		1.5pF	50	±0.25pF	0.55
4	CL05C1R5CC51PN □		1.5pF	100	±0.25pF	0.55
5	CL05C2R2CB51PN □		2.2pF	50	±0.25pF	0.55
6	CL05C2R2CC51PN □		2.2pF	100	±0.25pF	0.55
7	CL05C3R3CB51PN □		3.3pF	50	±0.25pF	0.55
8	CL05C3R3CC51PN □		3.3pF	100	±0.25pF	0.55
9	CL05C4R7CB51PN □		4.7pF	50	±0.25pF	0.55
10	CL05C4R7CC51PN □		4.7pF	100	±0.25pF	0.55
11	CL05C6R8DB51PN □		6.8pF	50	±0.5pF	0.55
12	CL05C6R8DC51PN □		6.8pF	100	±0.5pF	0.55
13	CL05C100JB51PN □		10pF	50	±5%	0.55
14	CL05C100JC51PN □		10pF	100	±5%	0.55
15	CL05C120JB51PN □		12pF	50	±5%	0.55
16	CL05C120JC51PN □		12pF	100	±5%	0.55
17	CL05C150JB51PN □		15pF	50	±5%	0.55
18	CL05C150JC51PN □		15pF	100	±5%	0.55
19	CL05C180JB51PN □		18pF	50	±5%	0.55
20	CL05C180JC51PN □		18pF	100	±5%	0.55
21	CL05C220JB51PN □		22pF	50	±5%	0.55
22	CL05C220JC51PN □		22pF	100	±5%	0.55
23	CL05C270JB51PN □		27pF	50	±5%	0.55
24	CL05C270JC51PN □		27pF	100	±5%	0.55
25	CL05C330JB51PN □		33pF	50	±5%	0.55
26	CL05C330JC51PN □		33pF	100	±5%	0.55
27	CL05C390JB51PN □		39pF	50	±5%	0.55
28	CL05C390JC51PN □		39pF	100	±5%	0.55
29	CL05C470JB51PN □		47pF	50	±5%	0.55
30	CL05C470JC51PN □		47pF	100	±5%	0.55
31	CL05C560JB51PN □		56pF	50	±5%	0.55
32	CL05C560JC51PN □		56pF	100	±5%	0.55
33	CL05C680JB51PN □		68pF	50	±5%	0.55
34	CL05C680JC51PN □		68pF	100	±5%	0.55
35	CL05C820JB51PN □		82pF	50	±5%	0.55
36	CL05C820JC51PN □		82pF	100	±5%	0.55
37	CL05C101JB51PN □		100pF	50	±5%	0.55
38	CL05C101JC51PN □		100pF	100	±5%	0.55
39	CL05C121JB51PN □		120pF	50	±5%	0.55
40	CL05C151JB51PN □		150pF	50	±5%	0.55
41	CL05C221JB51PN □		220pF	50	±5%	0.55
1	CL10C010CB81PN □	1.60×0.80	1.0pF	50	±0.25pF	0.9
2	CL10C010CC81PN □		1.0pF	100	±0.25pF	0.9
3	CL10C1R5CB81PN □		1.5pF	50	±0.25pF	0.9
4	CL10C1R5CC81PN □		1.5pF	100	±0.25pF	0.9

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Product Lineup (Automotive Capacitors_COG)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
5	CL10C2R2CB81PN □	1.60 × 0.80	2.2 pF	50	±0.25 pF	0.9
6	CL10C2R2CC81PN □		2.2 pF	100	±0.25 pF	0.9
7	CL10C3R3CB81PN □		3.3 pF	50	±0.25 pF	0.9
8	CL10C3R3CC81PN □		3.3 pF	100	±0.25 pF	0.9
9	CL10C4R7CB81PN □		4.7 pF	50	±0.25 pF	0.9
10	CL10C4R7CC81PN □		4.7 pF	100	±0.25 pF	0.9
11	CL10C6R8DB81PN □		6.8 pF	50	±0.5 pF	0.9
12	CL10C6R8DC81PN □		6.8 pF	100	±0.5 pF	0.9
13	CL10C100JB81PN □		10 pF	50	±5%	0.9
14	CL10C100JC81PN □		10 pF	100	±5%	0.9
15	CL10C120JB81PN □		12 pF	50	±5%	0.9
16	CL10C120JC81PN □		12 pF	100	±5%	0.9
17	CL10C150JB81PN □		15 pF	50	±5%	0.9
18	CL10C150JC81PN □		15 pF	100	±5%	0.9
19	CL10C180JB81PN □		18 pF	50	±5%	0.9
20	CL10C180JC81PN □		18 pF	100	±5%	0.9
21	CL10C220JB81PN □		22 pF	50	±5%	0.9
22	CL10C220JC81PN □		22 pF	100	±5%	0.9
23	CL10C270JB81PN □		27 pF	50	±5%	0.9
24	CL10C270JC81PN □		27 pF	100	±5%	0.9
25	CL10C330JB81PN □		33 pF	50	±5%	0.9
26	CL10C330JC81PN □		33 pF	100	±5%	0.9
27	CL10C390JB81PN □		39 pF	50	±5%	0.9
28	CL10C390JC81PN □		39 pF	100	±5%	0.9
29	CL10C470JB81PN □		47 pF	50	±5%	0.9
30	CL10C470JC81PN □		47 pF	100	±5%	0.9
31	CL10C560JB81PN □		56 pF	50	±5%	0.9
32	CL10C560JC81PN □		56 pF	100	±5%	0.9
33	CL10C680JB81PN □		68 pF	50	±5%	0.9
34	CL10C680JC81PN □		68 pF	100	±5%	0.9
35	CL10C820JB81PN □		82 pF	50	±5%	0.9
36	CL10C820JC81PN □		82 pF	100	±5%	0.9
37	CL10C101JB81PN □		100 pF	50	±5%	0.9
38	CL10C101JC81PN □		100 pF	100	±5%	0.9
39	CL10C121JB81PN □		120 pF	50	±5%	0.9
40	CL10C151JB81PN □		150 pF	50	±5%	0.9
41	CL10C221JB81PN □		220 pF	50	±5%	0.9
42	CL10C271JB81PN □		270 pF	50	±5%	0.9
43	CL10C331JB81PN □		330 pF	50	±5%	0.9
44	CL10C391JB81PN □		390 pF	50	±5%	0.9
45	CL10C471JB81PN □		470 pF	50	±5%	0.9
46	CL10C561JB81PN □		560 pF	50	±5%	0.9
47	CL10C681JB81PN □		680 pF	50	±5%	0.9
48	CL10C821JB81PN □		820 pF	50	±5%	0.9
49	CL10C102JB81PN □		1 nF	50	±5%	0.9

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Lineup (Automotive Capacitors_COG)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL21C100JB61PN □	2.00×1.25	10pF	50	±5%	0.7
2	CL21C100JC61PN □		10pF	100	±5%	0.7
3	CL21C120JB61PN □		12pF	50	±5%	0.7
4	CL21C120JC61PN □		12pF	100	±5%	0.7
5	CL21C150JB61PN □		15pF	50	±5%	0.7
6	CL21C150JC61PN □		15pF	100	±5%	0.7
7	CL21C180JB61PN □		18pF	50	±5%	0.7
8	CL21C180JC61PN □		18pF	100	±5%	0.7
9	CL21C220JB61PN □		22pF	50	±5%	0.7
10	CL21C220JC61PN □		22pF	100	±5%	0.7
11	CL21C270JC61PN □		27pF	100	±5%	0.7
12	CL21C330JB61PN □		33pF	50	±5%	0.7
13	CL21C330JC61PN □		33pF	100	±5%	0.7
14	CL21C390JB61PN □		39pF	50	±5%	0.7
15	CL21C390JC61PN □		39pF	100	±5%	0.7
16	CL21C470JB61PN □		47pF	50	±5%	0.7
17	CL21C470JC61PN □		47pF	100	±5%	0.7
18	CL21C560JB61PN □		56pF	50	±5%	0.7
19	CL21C560JC61PN □		56pF	100	±5%	0.7
20	CL21C680JB61PN □		68pF	50	±5%	0.7
21	CL21C680JC61PN □		68pF	100	±5%	0.7
22	CL21C820JB61PN □		82pF	50	±5%	0.7
23	CL21C820JC61PN □		82pF	100	±5%	0.7
24	CL21C101JB61PN □		100pF	50	±5%	0.7
25	CL21C101JC61PN □		100pF	100	±5%	0.7
26	CL21C121JB61PN □		120pF	50	±5%	0.7
27	CL21C121JC61PN □		120pF	100	±5%	0.7
28	CL21C151JB61PN □		150pF	50	±5%	0.7
29	CL21C151JC61PN □		150pF	100	±5%	0.7
30	CL21C221JB61PN □		220pF	50	±5%	0.7
31	CL21C221JC61PN □		220pF	100	±5%	0.7
32	CL21C271JB61PN □		270pF	50	±5%	0.7
33	CL21C271JC61PN □		270pF	100	±5%	0.7
34	CL21C331JB61PN □		330pF	50	±5%	0.7

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Product Lineup (Automotive Capacitors_COG)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
35	CL21C331JC61PN □	2.00 × 1.25	330pF	100	±5%	0.7
36	CL21C471JBC1PN □		470pF	50	±5%	0.95
37	CL21C471JCC1PN □		470pF	100	±5%	0.95
38	CL21C561JBC1PN □		560pF	50	±5%	0.95
39	CL21C561JCC1PN □		560pF	100	±5%	0.95
40	CL21C681JBC1PN □		680pF	50	±5%	0.95
41	CL21C681JCC1PN □		680pF	100	±5%	0.95
42	CL21C821JBC1PN □		820pF	50	±5%	0.95
43	CL21C821JCC1PN □		820pF	100	±5%	0.95
44	CL21C102JBC1PN □		1nF	50	±5%	0.95
45	CL21C102JCC1PN □		1nF	100	±5%	0.95
46	CL21C102JCF1PN □		1nF	100	±5%	1.35
47	CL21C122JBC1PN □		1.2nF	50	±5%	0.95
48	CL21C152JBC1PN □		1.5nF	50	±5%	0.95
49	CL21C182JBC1PN □		1.8nF	50	±5%	0.95
50	CL21C222JBC1PN □		2.2nF	50	±5%	0.95
51	CL21C272JBC1PN □		2.7nF	50	±5%	0.95
52	CL21C332JBC1PN □		3.3nF	50	±5%	0.95
53	CL21C392JBC1PN □		3.9nF	50	±5%	0.95
54	CL21C472JBC1PN □		4.7nF	50	±5%	0.95
55	CL21C562JBC1PN □		5.6nF	50	±5%	0.95
56	CL21C102JBF1PN □		1nF	50	±5%	1.35
57	CL21C122JBF1PN □		1.2nF	50	±5%	1.35
58	CL21C152JBF1PN □		1.5nF	50	±5%	1.35
59	CL21C182JBF1PN □		1.8nF	50	±5%	1.35
60	CL21C222JBF1PN □		2.2nF	50	±5%	1.35
61	CL21C272JBF1PN □		2.7nF	50	±5%	1.35
62	CL21C332JBF1PN □		3.3nF	50	±5%	1.35
63	CL21C392JBF1PN □		3.9nF	50	±5%	1.35
64	CL21C472JBF1PN □		4.7nF	50	±5%	1.35
65	CL21C562JBF1PN □		5.6nF	50	±5%	1.35
66	CL21C682JBF1PN □		6.8nF	50	±5%	1.35
67	CL21C822JBF1PN □		8.2nF	50	±5%	1.35
68	CL21C103JBF1PN □		10nF	50	±5%	1.35

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Product Lineup (Automotive Capacitors_X7R)

	Part Number	Size L×W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
1	CL05B223KB54PN □	1.00×0.50	22nF	50	±10%	0.55
2	CL05B104KO54PN □		100nF	16	±10%	0.55
1	CL10B221KC85PN □	1.60×0.80	220pF	100	±10%	0.90
2	CL10B471KC85PN □		470pF	100	±10%	0.90
3	CL10B102KB85PN □		1.0nF	50	±10%	0.90
4	CL10B102KC85PN □		1.0nF	100	±10%	0.90
5	CL10B222KB85PN □		2.2nF	50	±10%	0.90
6	CL10B222KC85PN □		2.2nF	100	±10%	0.90
7	CL10B472KB85PN □		4.7nF	50	±10%	0.90
8	CL10B472KC85PN □		4.7nF	100	±10%	0.90
9	CL10B103KA85PN □		10nF	25	±10%	0.90
10	CL10B103KB85PN □		10nF	50	±10%	0.90
11	CL10B103KC85PN □		10nF	100	±10%	0.90
12	CL10B153KA85PN □		15nF	25	±10%	0.90
13	CL10B153KB85PN □		15nF	50	±10%	0.90
14	CL10B223KA85PN □		22nF	25	±10%	0.90
15	CL10B223KB85PN □		22nF	50	±10%	0.90
16	CL10B333KA85PN □		33nF	25	±10%	0.90
17	CL10B333KB85PN □		33nF	50	±10%	0.90
18	CL10B473KO85PN □		47nF	16	±10%	0.90
19	CL10B473KA85PN □		47nF	25	±10%	0.90
20	CL10B473KB85PN □		47nF	50	±10%	0.90
21	CL10B683KO85PN □		68nF	16	±10%	0.90
22	CL10B683KA85PN □		68nF	25	±10%	0.90
23	CL10B683KB85PN □		68nF	50	±10%	0.90
24	CL10B104KO85PN □		100nF	16	±10%	0.90
25	CL10B104KA85PN □		100nF	25	±10%	0.90
26	CL10B104KB85PN □		100nF	50	±10%	0.90
27	CL10B154KO84PN □		150nF	16	±10%	0.90
28	CL10B154KA84PN □		150nF	25	±10%	0.90
29	CL10B224KO84PN □		220nF	16	±10%	0.90
30	CL10B224KA84PN □		220nF	25	±10%	0.90
31	CL10B334KO84PN □		330nF	16	±10%	0.90
32	CL10B334KA84PN □		330nF	25	±10%	0.90
33	CL10B474KO84PN □		470nF	16	±10%	0.90
34	CL10B474KA84PN □		470nF	25	±10%	0.90
35	CL10B105KO84PN □		1μF	16	±10%	0.90
1	CL21B102KB65PN □	2.00×1.25	1.0nF	50	±10%	0.70
2	CL21B102KC65PN □		1.0nF	100	±10%	0.70
3	CL21B222KB65PN □		2.2nF	50	±10%	0.70
4	CL21B222KC65PN □		2.2nF	100	±10%	0.70
5	CL21B472KB65PN □		4.7nF	50	±10%	0.70
6	CL21B472KC65PN □		4.7nF	100	±10%	0.70
7	CL21B103KB65PN □		10nF	50	±10%	0.70
8	CL21B103KC65PN □		10nF	100	±10%	0.70
9	CL21B153KB65PN □		15nF	50	±10%	0.70
10	CL21B153KC65PN □		15nF	100	±10%	0.70
11	CL21B223KB65PN □		22nF	50	±10%	0.70
12	CL21B223KC65PN □		22nF	100	±10%	0.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Product Lineup (Automotive Capacitors_X7R)

	Part Number	Size L × W (mm)	Capacitance	Rated Voltage (Vdc)	Capacitance Tolerance	Thickness Max. (mm)
13	CL21B333KBC5PN □	2.00 × 1.25	33 nF	50	±10%	0.95
14	CL21B333KCC5PN □		33 nF	100	±10%	0.95
15	CL21B473KAC5PN □		47 nF	25	±10%	0.95
16	CL21B473KBC5PN □		47 nF	50	±10%	0.95
17	CL21B473KCC5PN □		47 nF	100	±10%	0.95
18	CL21B683KAC5PN □		68 nF	25	±10%	0.95
19	CL21B683KBC5PN □		68 nF	50	±10%	0.95
20	CL21B683KCC5PN □		68 nF	100	±10%	0.95
21	CL21B104KOC5PN □		100 nF	16	±10%	0.95
22	CL21B104KAC5PN □		100 nF	25	±10%	0.95
23	CL21B104KBC5PN □		100 nF	50	±10%	0.95
24	CL21B104KBF5PN □		100 nF	50	±10%	1.35
25	CL21B104KCC5PN □		100 nF	100	±10%	0.95
26	CL21B104KCF5PN □		100 nF	100	±10%	1.35
27	CL21B154KOF4PN □		150 nF	16	±10%	1.35
28	CL21B154KAF4PN □		150 nF	25	±10%	1.35
29	CL21B154KBF4PN □		150 nF	50	±10%	1.35
30	CL21B224KOF4PN □		220 nF	16	±10%	1.35
31	CL21B224KAF4PN □		220 nF	25	±10%	1.35
32	CL21B224KBF4PN □		220 nF	50	±10%	1.35
33	CL21B334KOF4PN □		330 nF	16	±10%	1.35
34	CL21B334KAF4PN □		330 nF	25	±10%	1.35
35	CL21B334KBF4PN □		330 nF	50	±10%	1.35
36	CL21B474KOF4PN □		470 nF	16	±10%	1.35
37	CL21B474KAF4PN □		470 nF	25	±10%	1.35
38	CL21B474KBF4PN □		470 nF	50	±10%	1.35
39	CL21B684KOF4PN □		680 nF	16	±10%	1.35
40	CL21B684KAF4PN □		680 nF	25	±10%	1.35
41	CL21B105KOF4PN □		1 μF	16	±10%	1.35
42	CL21B105KAF4PN □		1 μF	25	±10%	1.35
43	CL21B225KOF4PN □		2.2 μF	16	±10%	1.35
1	CL31B104KBC5PN □	3.20 × 1.60	100 nF	50	±10%	1.00
2	CL31B154KBP5PN □		150 nF	50	±10%	1.25
3	CL31B224KAC5PN □		220 nF	25	±10%	1.00
4	CL31B224KBP5PN □		220 nF	50	±10%	1.25
5	CL31B334KAC5PN □		330 nF	25	±10%	1.00
6	CL31B334KBH5PN □		330 nF	50	±10%	1.80
7	CL31B474KAC5PN □		470 nF	25	±10%	1.00
8	CL31B474KBH5PN □		470 nF	50	±10%	1.80
9	CL31B684KAP5PN □		680 nF	25	±10%	1.25
10	CL31B684KBH5PN □		680 nF	50	±10%	1.80
11	CL31B105KOP5PN □		1 μF	16	±10%	1.25
12	CL31B105KAP5PN □		1 μF	25	±10%	1.25
13	CL31B105KBH5PN □		1 μF	50	±10%	1.80
14	CL31B155KOH4PN □		1.5 μF	16	±10%	1.80
15	CL31B155KAH4PN □		1.5 μF	25	±10%	1.80
16	CL31B155KBH4PN □		1.5 μF	50	±10%	1.80
17	CL31B225KOH4PN □		2.2 μF	16	±10%	1.80
18	CL31B225KAH4PN □		2.2 μF	25	±10%	1.80
19	CL31B225KBH4PN □		2.2 μF	50	±10%	1.80


※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p80.

Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Reliability Test Condition (Automotive Capacitors)

No	Item		Performance	Test Condition
1	Pre-and Post-Stress Electrical Test		-	
2	High Temperature Exposure	Appearance	No abnormal exterior appearance	Unpowered, 1000hrs@T=150℃ Measurement at 24±2hrs after test conclusion
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	
			CLASS II Within ±10%	
		Q	CLASS I Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 + 20 × C (C : Capacitance)	
		Tanδ	CLASS II Rated Voltage ≥ 25V : 0.03 max ≥ 16V : 0.05 max ≥ 10V : 0.075 max	
3	Temperature Cycling	IR	More than 10,000 MΩ or 500 MΩ × μF (Whichever is smaller)	1000Cycles Measurement at 24±2hrs after test conclusion
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	
			CLASS II Within ±10%	
		Q	CLASS I Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 + 20 × C (C : Capacitance)	
4	Destructive Physical Analysis	Tanδ	CLASS II Rated Voltage ≥ 25V : 0.03 max ≥ 16V : 0.05 max ≥ 10V : 0.075max	Per EIA 469
		IR	More than 10,000 MΩ or 500 MΩ × μF (Whichever is smaller)	
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	
		CLASS II Within ±12.5%		
5	Moisture Resistance	Q	CLASS I Capacitance ≥ 30pF : Q ≥ 350 10≤Capacitance< 30pF : Q ≥ 275+(5/2) × C Capacitance < 10pF : Q ≥ 200+10 × C (C : Capacitance)	10Cycles, t=24hrs/cycle Heat (25~65℃) and humidity (80~98%), Unpowered measurement at 24±2hrs after test conclusion
		Tanδ	CLASS II Rated Voltage ≥ 25V : 0.03 max ≥ 16V : 0.05 max ≥ 10V : 0.075max	
		IR	More than 10,000 MΩ or 500 MΩ × μF (Whichever is smaller)	
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	

Step	Temperature(℃)	Time(min.)
1	Min. operating Temp. ±2	15±3
2	25±2	1
3	Max. operating Temp. ±2	15±3
4	25±2	1

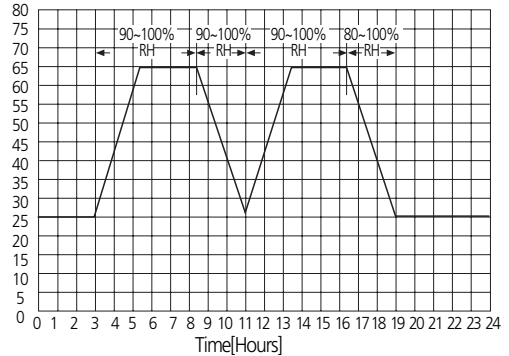

No	Item		Performance	Test Condition						
6	Biased Humidity	Appearance	No abnormal exterior appearance	1000hrs 85℃/85%RH, Rated Voltate and 1.3~1.5V, (add 100kohm resistor) Measurement at 24±2hrs after test conclusion The charge/discharge current is less than 50mA.						
		Capacitance Change	CLASS I		Within ±2.5% or 0.25pF, (Whichever is larger)					
			CLASS II		Within ±12.5%					
		Q	CLASS I		Capacitance ≥ 30pF : Q ≥200 <30pF : Q ≥100 +(10/3)×C (C : Capacitance)					
		Tanδ	CLASS II		Rated Voltage ≥ 25V : 0.035 max ≥ 16V : 0.05 max ≥ 10V : 0.075max					
	IR		More than 500 MΩor 25 MΩ × μF (Whichever is Smaller)							
7	High Temperature Operating Life	Appearance	No abnormal exterior appearance	1000hrs @ TA=125℃, 200% Rated Voltage, Measurement at 24±2hrs after test conclusion The charge/discharge current is less than 50mA.						
		Capacitance Change	CLASS I		Within ±3.0% or 0.3pF, (Whichever is larger)					
			CLASS II		Within ±12.5%					
		Q	CLASS I		Capacitance ≥ 30pF : Q ≥350 ≥ 10pF : Q≥275+(5/2)×C < 10pF : Q≥200+10×C (C : Capacitance)					
		Tanδ	CLASS II		Rated Voltage ≥ 25V : 0.035 max ≥ 16V : 0.05 max ≥ 10V : 0.075max					
	IR		More than 1,000 MΩor 50 MΩ × μF (Whichever is smaller)							
8	External Visual		No abnormal exterior appearance	Microscope (x10)						
9	Physical Dimensions		Within the specified dimensions	Using the calipers						
10	Mechanical Shock	Appearance	No abnormal exterior appearance	Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks) <table><tr><td>Peakvalue</td><td>Duration</td><td>Wave</td></tr><tr><td>1,500G</td><td>0.5ms</td><td>Half sine</td></tr></table>	Peakvalue	Duration	Wave	1,500G	0.5ms	Half sine
		Peakvalue	Duration		Wave					
		1,500G	0.5ms		Half sine					
		Capacitance Change	CLASS I		Within ±2.5% or 0.25pF, (Whichever is larger)					
			CLASS II		Within ±10%					
Q	CLASS I	Capacitance ≥ 30pF : Q ≥1,000 <30pF : Q ≥400 +20×C (C : Capacitance)								
Tanδ	CLASS II	Rated Voltage ≥ 25V : 0.025 max ≥ 16V : 0.035 max ≥ 10V : 0.05max								
	IR		More than 10,000 MΩor 500 MΩ × μF (Whichever is smaller)							

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

No	Item		Performance	Test Condition
11	Vibration	Appearance	No abnormal exterior appearance	5g's for 20min., 12cycles each of 3 orientations, Use 8" x5" PCB 0.031" Thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10~2000 Hz.
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
		Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	
		Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	
12	Resistance to Solder Heat	IR	More than 10,000 $\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller)	Solder pot : $260 \pm 5^\circ\text{C}$, $10 \pm 1\text{sec}$.
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
		Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	
13	Thermal Shock	Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	$-55^\circ\text{C}/+125^\circ\text{C}$ Note: Number of cycles required - 300, Maximum transfer time-20 sec, Dwell time-15min. Air-Air
		IR	More than 10,000 $\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller)	
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
14	ESD	Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	AEC-Q200-002
		Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	
		IR	More than 10,000 $\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller)	
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
14	ESD	Appearance	No abnormal exterior appearance	AEC-Q200-002
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
		Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	
		Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	
14	ESD	IR	More than 10,000 $\text{M}\Omega$ or $500\text{M}\Omega \times \mu\text{F}$ (Whichever is smaller)	AEC-Q200-002

No	Item			Performance	Test Condition																		
15	Solderability			95% of the terminations is to be soldered evenly and continuously	a) Preheat at 155℃ for 4 hours, Immerse in solder for 5s at 235±5℃ b) Steam aging for 8 hours, Immerse in solder for 5s at 235±5℃ c) Steam aging for 8 hours, Immerse in solder for 120s at 260±5℃ solder : a solution ethanol and rosin																		
16	Electrical Characterization	Capacitance		Within specified tolerance	The Capacitance /D.F. should be measured at 25℃, <table><tr><td>Class</td><td>Capacitance</td><td>Frequency</td><td>Vrms</td></tr><tr><td rowspan="2">Class I</td><td>1000pF ↓</td><td>1 MHz ±10%</td><td>0.5~5Vrms</td></tr><tr><td>1000pF ↑</td><td>1 kHz ±10%</td><td>1.0±0.2Vrms</td></tr><tr><td rowspan="2">Class II</td><td>10μF ↓</td><td>1 kHz ±10%</td><td>1.0±0.2Vrms</td></tr><tr><td>10μF ↑</td><td>120 Hz ±20%</td><td>0.5±0.1Vrms</td></tr></table>	Class	Capacitance	Frequency	Vrms	Class I	1000pF ↓	1 MHz ±10%	0.5~5Vrms	1000pF ↑	1 kHz ±10%	1.0±0.2Vrms	Class II	10μF ↓	1 kHz ±10%	1.0±0.2Vrms	10μF ↑	120 Hz ±20%	0.5±0.1Vrms
		Class	Capacitance	Frequency		Vrms																	
		Class I	1000pF ↓	1 MHz ±10%		0.5~5Vrms																	
			1000pF ↑	1 kHz ±10%		1.0±0.2Vrms																	
		Class II	10μF ↓	1 kHz ±10%	1.0±0.2Vrms																		
			10μF ↑	120 Hz ±20%	0.5±0.1Vrms																		
		Q	CLASS I	Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 +20×C (C: Capacitance)	I.R. should be measured with a DC voltage not exceeding Rated Voltage @25℃, @125℃ for 60~120 sec. Dielectric Strength : 250% of the rated voltage for 1~5 seconds The charge/discharge current is less than 50mA.																		
						Tanδ	CLASS II	Rated Voltage ≥ 25V : 0.025 max ≥ 16V : 0.035 max ≥ 10V : 0.05max															
		IR@25℃	CLASS I	More than 100,000MΩ or 1,000MΩ × μF (Whichever is smaller)																			
			CLASS II	More than 10,000MΩ or 500MΩ × μF (Whichever is smaller)																			
IR@125℃	CLASS I	More than 10,000MΩ or 100MΩ × μF (Whichever is smaller)																					
	CLASS II	More than 1,000MΩ or 10MΩ × μF (Whichever is smaller)																					
Dielectric Strength		No dielectric breakdown or mechanical breakdown																					
17	Board Flex	Appearance		Bending to the limit for 5 seconds Limit : Class I - 3mm Class II - 2mm																			
		Capacitance Change	CLASS I			Within ±5.0% or 0.5pF, (Whichever is larger)																	
			CLASS II			Within ±10%																	
18	Terminal Strength(SMD)	Appearance		18N, for 60±1 sec. * 0603(1608) –10N, 0402(1005) –2N																			
		Capacitance Change	CLASS I		Within ±2.5% or 0.25pF, (Whichever is larger)																		
			CLASS II		Within ±10%																		
19	Beam Load			Destruction value should be exceed Chip Length ≤2.5mm a) Chip Thickness > 0.5mm : 20N b) Chip Thickness ≤0.5mm : 8N Chip Length ≥ 3.2mm a) Chip Thickness ≥ 1.25mm : 54.5N b) Chip Thickness < 1.25mm : 15N	Beam speed Chip Length ≤2.5mm, 0.5±0.05mm/sec Chip Length ≥3.2mm, 2.5±0.25mm/sec																		
20	Capacitance Temperature Characteristics	Capacitance Change	CLASS I	0±30 ppm/℃	<table><tr><td>Step</td><td>Temperature(℃)</td><td>Time(min)</td></tr><tr><td>1</td><td>25 ± 2</td><td>1</td></tr><tr><td>2</td><td>Min. Operating Temp. ±2</td><td>15±3</td></tr><tr><td>3</td><td>25 ± 2</td><td>1</td></tr><tr><td>4</td><td>Max. Operating Temp. ±2</td><td>15±3</td></tr><tr><td>5</td><td>25 ± 2</td><td>1</td></tr></table>	Step	Temperature(℃)	Time(min)	1	25 ± 2	1	2	Min. Operating Temp. ±2	15±3	3	25 ± 2	1	4	Max. Operating Temp. ±2	15±3	5	25 ± 2	1
			Step	Temperature(℃)		Time(min)																	
		1	25 ± 2	1																			
		2	Min. Operating Temp. ±2	15±3																			
		3	25 ± 2	1																			
		4	Max. Operating Temp. ±2	15±3																			
5	25 ± 2	1																					
CLASS II	Within ±15%																						
Temperature Coefficient	CLASS I	0±30 ppm/℃																					
	Capacitance Drift	CLASS I	Within ±0.2% or 0.05pF, (Whichever is larger)																				

* If you want more detailed information, Please Visit Samsung Electro-mechanics website(www.semclcr.com)

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors


Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Embossed Plastic Tape

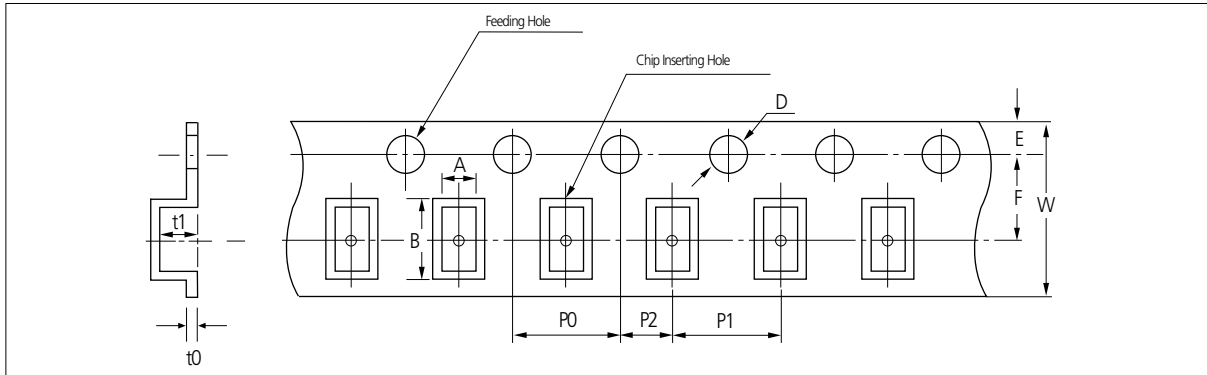


Unit: inch(mm)

Symbol Type	A	B	W	F	E	P1	P2	P0	D	t1	t0
01005 (0402)	0.25 ±0.02	0.45 ±0.02	4.0 ±0.05	1.8 ±0.02	0.9 ±0.05	1.0 ±0.02	1.0 ±0.02	2.0 ±0.04	Ø0.8 ±0.04	0.24 ±0.02	0.5 max
0603 (1608)	1.05 ±0.15	1.9 ±0.15	8.0 ±0.3	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	Ø1.5 +0.1/ -0.03	2.9 max	0.6 Below
0805 (2012)	1.45 ±0.2	2.3 ±0.2									
1206 (3216)	1.9 ±0.2	3.5 ±0.2									
1210 (3225)	2.8 ±0.2	3.6 ±0.2									
1808 (4520)	2.3 ±0.2	4.9 ±0.2	12.0 ±0.3	5.60 ±0.05	1.75 ±0.1	8.0 ±0.1	2.0 ±0.05	4.0 ±0.1	Ø1.5 +0.1/ -0.03	3.8 max	0.6 Below
1812 (4532)	3.6 ±0.2	4.9 ±0.2									
2220 (5750)	5.5 ±0.2	6.2 ±0.2									
0204 (5010)	0.62 +0.05 /-0.10	1.12 +0.05 /-0.10	0.8 ±0.3	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	Ø1.5 +0.1/ -0.03	2.5 max	0.6 Below
0306 (0816)	1.1 ±0.2	1.9 ±0.2									
0508 (1220)	1.45 ±0.2	2.3 ±0.2									
0612 (1632)	2.0 ±0.2	3.6 ±0.2									

Peeling off of Cover Tape

- 5 g.f ≤ Peel off force ≤ 70 g.f

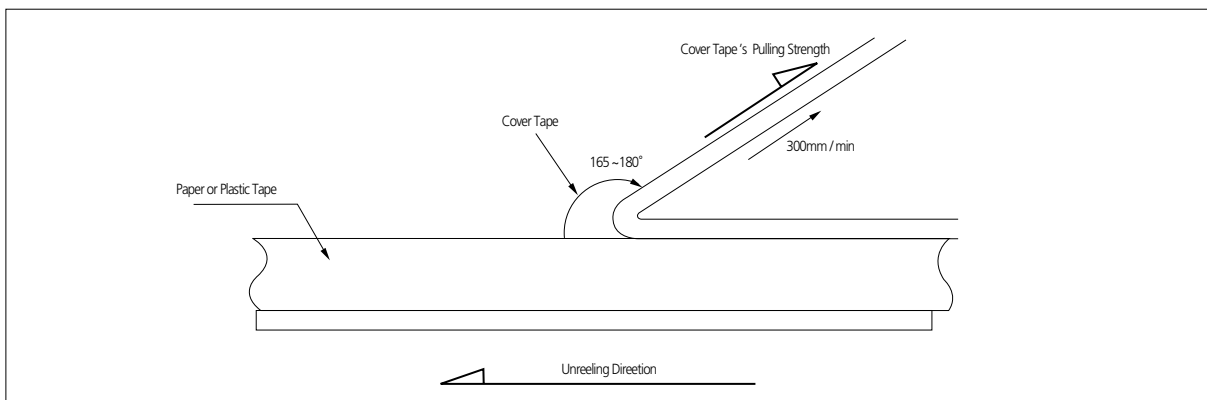

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors


Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Taping Size

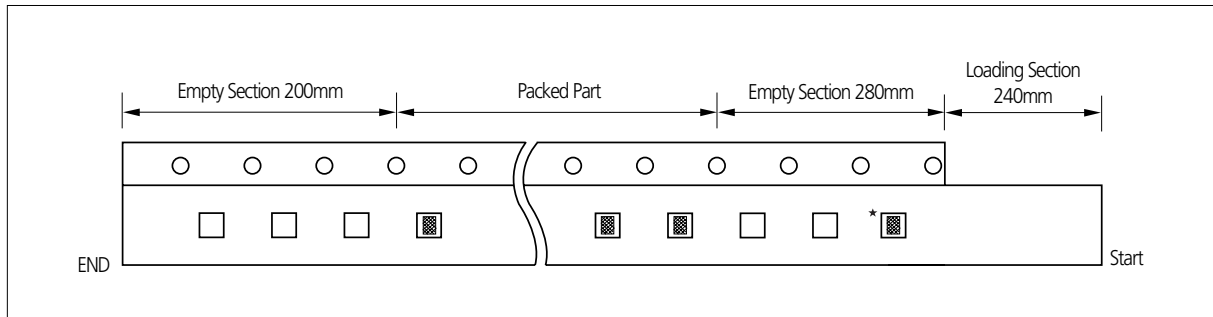


- The chip is only use for identifying the label and packaged products.
Please don't use the chip.

Unit: kpcs

Size	T code	Quantity & Packing Code								
		Paper Type					Plastic Type			
		C (7"reel)	H (7"reel)	O (10"reel)	D (13"reel)	L (13"reel)	E (7"reel)	G (7"reel)	F (13"reel)	S (10"reel)
01005(0402)	2	20	-	-	-	-	50	-	-	-
0201(0603)	3	10	15	30	50	-	-	-	-	-
0402(1005)	3	10	15	30	50	-	-	-	-	-
	5	10	-	30	50	40	-	-	-	-
0504(1410)	8	4	-	10	10	15	-	-	-	-
0603(1608)	5	4	-	10	10	-	-	-	-	-
	8	4	-	10	10	15	3	-	-	-
0604(1610)	D	-	-	-	-	-	3	-	10	6
0805(2012)	A, C	4	-	10	10	15	-	-	-	-
	E, F, Q	-	-	-	-	-	2	3	10	6
1206(3216)	C	4	-	10	10	15	-	-	-	-
	E, F, P	-	-	-	-	-	2	3	10	6
	H	-	-	-	-	-	2	-	8	4
1210(3225)	9, D, C, O	-	-	-	-	-	2	-	10	-
	E, F, M	-	-	-	-	-	2	-	10	-
	H, T	-	-	-	-	-	2	-	8	4
	I, U	-	-	-	-	-	2	-	4	-
	J, V	-	-	-	-	-	1	-	4	-
	S	-	-	-	-	-	2	-	8	-
1808(4520)	F	-	-	-	-	-	2	-	-	-
1812(4532)	F, H, I	-	-	-	-	-	1	-	4	-
	L, J	-	-	-	-	-	-	-	2	-
2220(5750)	H, I, J	-	-	-	-	-	-	-	2	-

* Note : This catalog has only typical specifications because there is no space for detailed specifications.
Please approve our product specifications or transact the approval sheet for product specifications before ordering.

Reel Dimensions

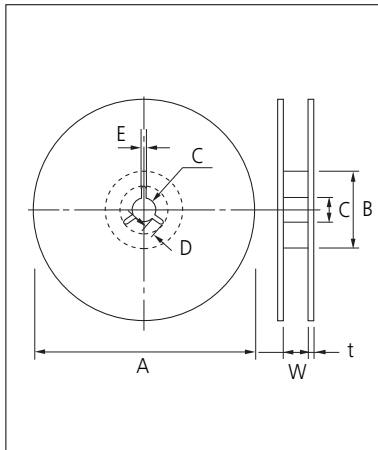

Unit: mm

Symbol	Tape Width	A	B	C	D
7" Reel	8mm	$\varnothing 180+0/-3$	$\varnothing 60\pm 1.0$	$\varnothing 13\pm 0.3$	4 ± 0.2
	12mm	$\varnothing 180+0/-3$	$\varnothing 60+1/-0$	$\varnothing 13\pm 0.3$	4 ± 0.2
10" Reel	8mm	$\varnothing 258+0/-3$	$\varnothing 80+1/-0$	$\varnothing 13\pm 0.3$	4 ± 0.2
	12mm	$\varnothing 258+0/-3$	$\varnothing 80+1/-0$	$\varnothing 13\pm 0.3$	4 ± 0.2
13" Reel	8mm	$\varnothing 330\pm 2.0$	$\varnothing 80\pm 1.0$	$\varnothing 13\pm 0.3$	4 ± 0.2
	12mm	$\varnothing 330\pm 2.0$	$\varnothing 80\pm 1.0$	$\varnothing 13\pm 0.3$	4 ± 0.2

Symbol	Tape Width	E	W	t
7" Reel	8mm	2.0 ± 0.5	9 ± 0.5	1.2 ± 0.2
	12mm	2.0 ± 0.5	13 ± 0.5	1.2 ± 0.2
10" Reel	8mm	2.0 ± 0.5	9 ± 0.5	1.8 ± 0.2
	12mm	2.0 ± 0.5	13 ± 0.5	1.8 ± 0.2
13" Reel	8mm	2.0 ± 0.5	9 ± 0.5	2.2 ± 0.2
	12mm	2.0 ± 0.5	13 ± 0.5	2.2 ± 0.2

Part Numbering
System

General
Capacitors

High Capacitance
Capacitors

Super Small Size
Capacitors

Medium-High
Voltage Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition


Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Bulk Case Packaging

- Bulk case packaging can reduce the stock space and transportation costs.
- The bulk feeding system can increase the productivity.
- It can eliminate the components loss.

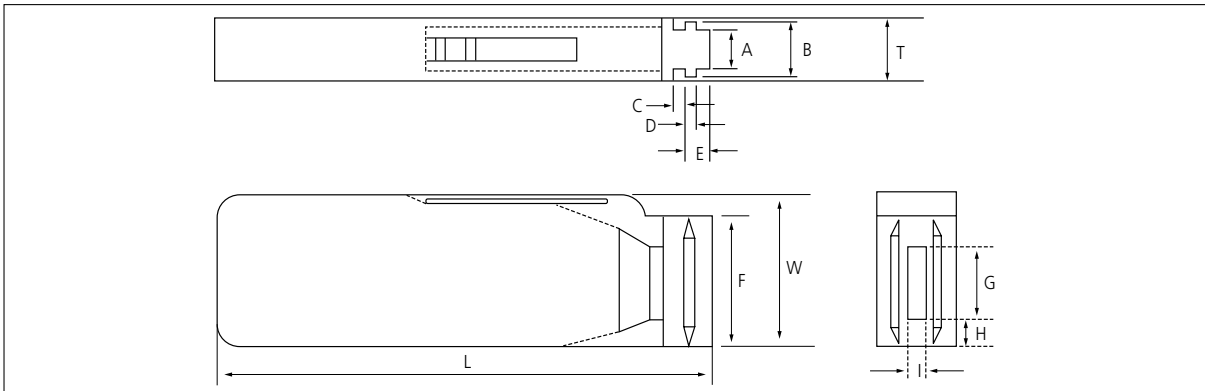

Unit: mm

Symbol	A	B	T	C	D	E
Dimension	6.8 ± 0.1	8.8 ± 0.1	12 ± 0.1	$1.5+0.1/-0$	$2+0/-0.1$	$3.0+0.2/-0$

Symbol	F	W	G	H	L	I
Dimension	$31.5+0.2/-0$	$36+0/-0.2$	19 ± 0.35	7 ± 0.35	110 ± 0.7	5 ± 0.35

• QUANTITY

Unit: inch(mm) and pcs

Size	0402(1005)	0603(1608)	0805(2012)	
			$T\leq 0.85\text{mm}$	$T\geq 1.0\text{mm}$
Quantity	50,000	10,000 or 15,000	10,000	5,000

Application Manual for Surface Mounting

1.Storage of products

1-1. Storage Environment

Tape packing materials are designed to withstand long-term storage, but they will degrade more rapidly in the presence of high temperature or high humidity. Therefore, the products must be stored in an ambient 5~40℃ with a relative humidity of 20~70%. Allowable storage period is within 6 months from the outgoing date of delivery.

1-2. Corrosive Gases

Since sulfur and chlorine may degrade the solderability of the end termination, it is important to store the capacitors in an environment free of these gases


1-3. Temperature Fluctuations

Since dew condensation may occur by the differences in temperature when the products are taken out of storage, it is important to maintain a temperature-controlled environment.

2.Design of Solder Land Pattern

When designing printed circuit boards, the shape and size of the solder lands must allow for the proper amount of solder on the capacitor. The amount of solder at the end terminations has a direct effect on the probability that the chip will crack. The greater amount of solder, the larger amount of stress on the chip, and the more likely that it will break. Use the following illustrations as guidelines for proper Solder land design.

Recommendation of solder Land Shape and Size

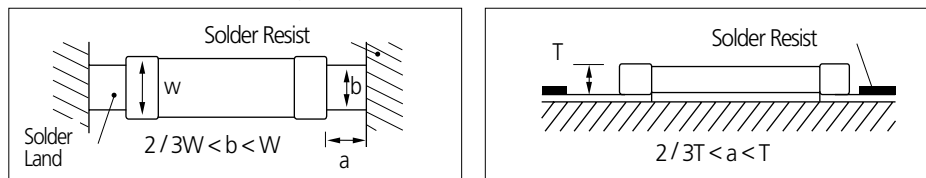

3.Adhesives

MLCCs generally require the use of an adhesive to position the chips to the circuit board prior to soldering.

3-1. Requirements for Adhesives

They must have enough adhesion so that the chips will not fall off or move during the handling of the circuit board.

They must maintain their adhesive strength when exposed to soldering temperatures.

They should not spread or run when applied to the circuit board.

They should have a long pot life.

They should harden quickly.


They should not corrode the circuit board or chip material.

They should be a good insulator.

They should be non-toxic, and not produce harmful gases, nor be harmful when touched.

3-2. Application Method

It is important to use the proper amount of adhesive. Too little will cause poor adhesion to the circuit board, and too much may strain the conductor pattern, thereby causing defective soldering. The following illustrations show the proper quantity of adhesive.

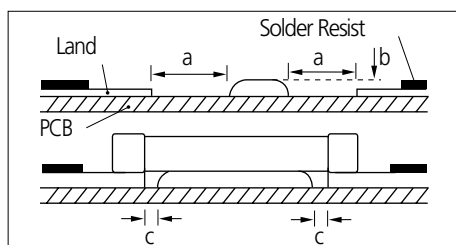

Unit: mm		
Type	21	31
a	0.2min	0.2min
b	70~100μm	70~100μm
c	>0	>0

3-3. Adhesive hardening Characteristics

To prevent oxidation of the terminations, the adhesive must harden at 160℃ or less, within 2 minutes or less.

4. Mounting


4-1. Mounting Head Pressure

Excessive pressure will cause chip capacitors to crack. The pressure between nozzle and chip capacitor will be 300g maximum during mounting.

4-2. Bending Stress

Bending of printed circuit board by mounting head when double-sided circuit boards are used, chip capacitors first are mounted and soldered onto one side of the board. When the capacitors are mounted onto the other side, it is important to support the board as shown in the illustration.

If the circuit board is not supported, it may bend, causing the already-installed capacitors to crack.

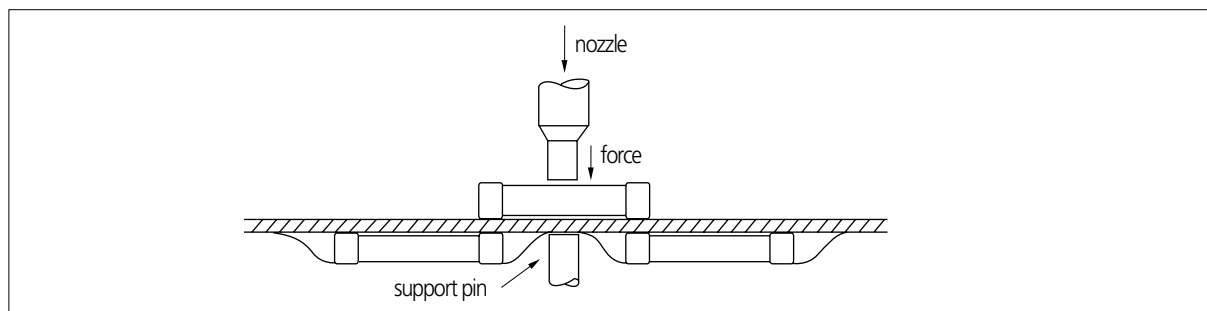Part Numbering
SystemGeneral
CapacitorsHigh Capacitance
CapacitorsSuper Small Size
CapacitorsMedium-High
Voltage CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

5. Flux

Although highly-activated flux gives better solderability, substances which increase activity may also degrade the insulation of the chip capacitors. To avoid such degradation, it is recommended that a mildly activated rosin flux (less than 0.2% chlorine) be used.

6. Soldering

Since a multilayer ceramic chip capacitor comes into direct contact with melted solder during soldering, it is exposed to potentially mechanical stress caused by the sudden temperature change. The capacitor may also be subject to silver migration, and to contamination by the flux. Because of these factors, soldering technique is critical.

6-1. Soldering Methods


Method	Classification	
Reflow soldering	· Overall heating	· Infrared rays · Hot plate · VPS (Vapor phase)
	· Local heating	· Air heater · Laser · Light beam
Flow Soldering	· Single wave · Double wave	

6-2. Soldering Profile

To avoid the crack problem by sudden temperature change, follow the temperature profile in the adjacent graph.


6-2-1 Pb-Free (Sn 100%) Plating

▪ REFLOW SOLDERING

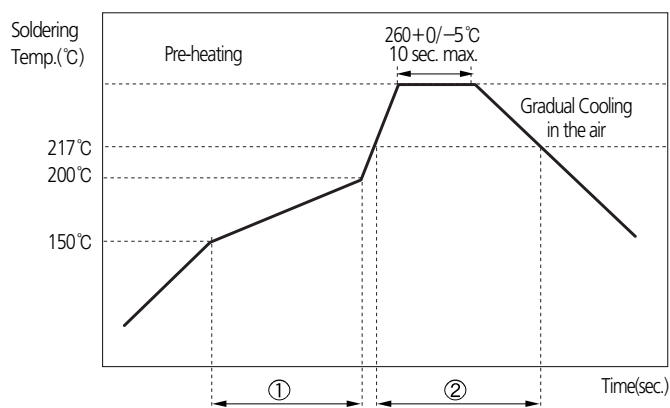

SolderingTemp. (°C)	Pre-heating Time (①, sec.)	Soldering Time (②, sec.)
260+0/-5°C	60~120	60~150

▪ FLOW SOLDERING

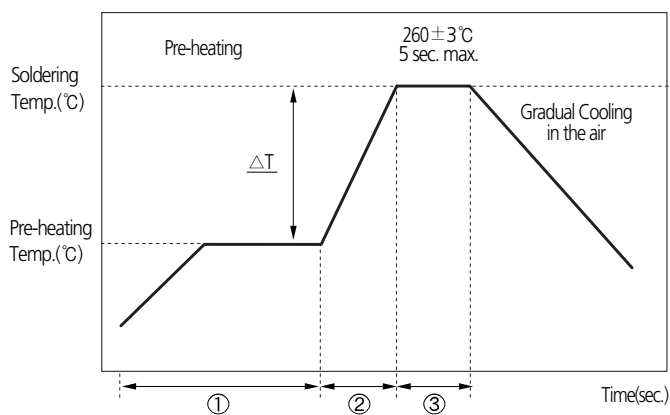

ΔT (°C)	Soldering Temp. (°C)	Pre-heatingTime (①+②, sec.)	SolderingTime (③, sec.)
≤150 (1206 and below size)	260±3	≥ 120	≤5

▪ SOLDER IRON(Hand Soldering)



Variation of Temp.(°C)	Soldering Temp(°C)	Pre-heating Time(sec.)	Soldering Time(sec.)	Cooling Time(sec.)	Condition of Iron Facilities		
					Wattage	Tip Diameter	Soldering Time
$\Delta T \leq 130$	300±10°C max.	≥ 60 sec.	≤ 4 sec.	-	20W max.	3mm max.	4 sec max.

※ Caution - Iron tip should not contact with ceramic body directly

6-3. Manual Soldering

Manual soldering can pose a great risk of creating thermal cracks in chip capacitors. The hot soldering iron tip comes into direct contact with the end terminations, and operator’s carelessness may cause the tip of the soldering iron to come into direct contact with the ceramic body of the capacitor. Therefore the soldering iron must be handled carefully, and close attention must be paid to the selection of the soldering iron tip and to temperature control of the tip.

6-4. Amount of Solder

Too much Solder		Cracks tend to occur due to large stress.
Not enough solder		Weak holding force may cause bad connections or detaching of the capacitor

6-5. Cooling

Natural cooling using air is recommended. If the chips are dipped into solvent for cleaning, the temperature difference (ΔT) must be less than 100°C

6-6. Cleaning

If rosin flux is used, cleaning usually is unnecessary. When strongly activated flux is used, chlorine in the flux may dissolve into some types of cleaning fluids, thereby affecting the chip capacitors. This means that the cleaning fluid must be carefully selected, and should always be new.

7. Notes for Separating Multiple, Shared PC Boards

A multi-PC board is separated into many individual circuit boards after soldering has been completed. If the board is bent or distorted at the time of separation, cracks may occur in the chip capacitors. Carefully choose a separation method that minimizes the bending of the circuit board.

Part Numbering System

General Capacitors

High Capacitance Capacitors

Super Small Size Capacitors

Medium-High Voltage Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



SAMSUNG
ELECTRO-MECHANICS

OHSAS18001



Quality System Certification status for each factory site

87



Passive components sales offices

•Head office

206, Cheomdansaneop Road,
Yeongtong-gu, Suwon-city,
Gyeonggi province, Korea,
443-743

Europe

Tel: +82-31-210-6328

E-mail: james.pyun@samsung.com

America

Tel: +82-31-210-6803

E-mail: wesley.roh@samsung.com

Asia

Tel: +82-31-210-6791

E-mail: peter_kim@samsung.com

Domestic

Tel: +82-31-210-5074

E-mail: boungcho.lee@samsung.com

•Manufacturing sites

Suwon Plant (Korea)

206, Cheomdansaneop Road,
Yeongtong-gu, Suwon-city,
Gyeonggi province, Korea,
443-743

Tel: +82-31-210-5074

E-mail: boungcho.lee@samsung.com

Busan Plant (Korea)

1623-2, Songjeong-dong,
Gangseo-gu, Busan, Korea,
618-270

Tel: +82-51-970-7671

E-mail: kyc.kweon@samsung.com

Tianjin Plant (China)

27, Heiniucheng-Road, Hexi District,
Tianjin, 300210 China

Tel: +86-22-2397-9000(310)

E-mail: moohantop.Park@samsung.com

High Tech (China)

Xiqind Dist. Micro-Electronics
Industrial Park, Jingang Highway,
Tianjin, China 300485

Tel: +86-22-23979000-313

E-mail: enhao.song@samsung.com

Binhai Plant (China)

80, Xiaqing Road, West area of
BinHai development zone,
TianJin, 300458, China

Tel: +86-22-6686-3333(1300)

E-mail: sk1000.kim@samsung.com

Philippines Plant (Philippines)

Block No.5, Calamba Premiere
International Park, Batino, Calamba,
Laguna, Manila, Philippines 4027

Tel: +63-49-545-0422

E-mail: donna@samsung.com

•Asia sales offices

Shenzhen Office

46 F, New World Center,
Yitian Road, Futian District,
Shenzhen, 518026 China

Tel: +86-755-8608-5571

E-mail: jackson.xian@samsung.com

Shanghai Office

Rm. 1211, Shanghai International
Trade Center, No. 2201 Yan an(W) Rd.,
Shanghai, 200335 China

Tel: +86-21-6270-4168(274)

E-mail: dennis.cha@samsung.com

HongKong Office

8/F., Central Plaza, 18 Harbour Road,
Wanchai, Hongkong, China

Tel: +852-28626344

E-mail: vivianchan@samsung.com

Qingdao Office

Rm 1201. Growne Plaza Qingdao 76,
Xiang Gang Zhong Rd, Qingdao,
266071 China

Tel: +86-532-85779102

E-mail: zhengguo.cui@samsung.com

Taiwan Office

9F-1, Np. 399 Ruey Kuang Rd., Neihu
District, Taipei City, Taiwan, 114

Tel: +886-2-2656-8356

E-mail: kevin0130.wang@samsung.com

Singapore Office

3 Church Street Samsung Hub,
#23-02 Singapore 049483

Tel: +65-6833-3228

E-mail: winson.yeong@samsung.com

Bangkok Office

23rd Floor, Lake Rajada Office Complex
193/89 Rachadapisek Road,
Khet Klongtoey, Bangkok 10110, Thailand

Tel: +66-2-661-8004~5

E-mail: yangshin.yi@samsung.com

•America sales office

Irvine Office

3333 Michelson Drive,
Suite 500, Irvine, CA 92612, USA

Tel: +1-949-797-8016

E-mail: andrew.skelly@samsung.com

•Europe sales offices

Frankfurt Office

Samsung Haus, Am Kronberger Hang 6,
D-65824 Schwalbach/Ts. Germany

Tel: +49-6196-66-7255

E-mail: frank.goebel@samsung.com

Hungary Office

H-2310, Leshegy utca 2-4,
Szigetszentmiklos, Pest megye, Hungary

Tel: +36-24-551-148

E-mail: jun21c.lee@samsung.com

•Domestic Distributors

Korchip Corporation

817-38, Anyang 2-dong, Manan-gu,
Anyang-city, Gyeonggi province,
Korea, 430-812

Tel: +82-31-361-8100

E-mail: itasap@korchip.com

Chunghan

Chunghan Bldg., 121-284, Dangsang-dong,
Youngdeungpo-gu, Seoul, Korea

Tel: +82-2-718-3322

E-mail: ish@ichunghan.co.kr

SAMT

Daekyung Bldg., 983-10, Daechi-dong,
Gangnam-gu, Seoul, Korea

Tel: +82-2-3458-9000

E-mail: info@isamt.com

CHUNGMAC

#53-5 Wonhyoro-3ga Yongsan-gu,
Seoul, Korea

Tel: +82-31-234-2367~8

E-mail: webmaster@chungmac.co.kr

APEXINT

Room #905. C-dong Woorimlion's Valley
371-28, Gasan-dong, Guemcheon-gu,
Seoul, Korea

Tel: +82-2-2026-2610(2)

E-mail: info@apexint.co.kr